



Advantages of GMN high frequency spindles	
The development	4
Advantages of hybrid ceramic bearings	5
Design	
Bearing systems, Lubrication system	6 - 7
Coolant through the shaft	8
Utility connections	9 - 11
Typical installation schematic	12
Spindle selection - Standard and Options	13 - 15
Technical data	16 - 21
Motor	
Description	22
Power characteristics	23 - 37
Drives	
Drive systems, Overspeed and standstill monitor	38 - 39
Accessories - Cable	40
Tool interface	
Safety aspects	41
Spindle nose and Grinding quill interface, Speed limitation	42 - 45
Shrink fit tool holders	46 - 47
Short taper interface	48
HSK style interface, HSK clamping system	49 - 50
Tool clamping systems	51
Accessories	
Oil/air lubricator, Chillers	52 - 55
Proper spindle selection	
Applications	56 - 59
Workpiece cooling	60
Quality assurance	61
Successful specific spindles	62

The Development

Increase of power and torque

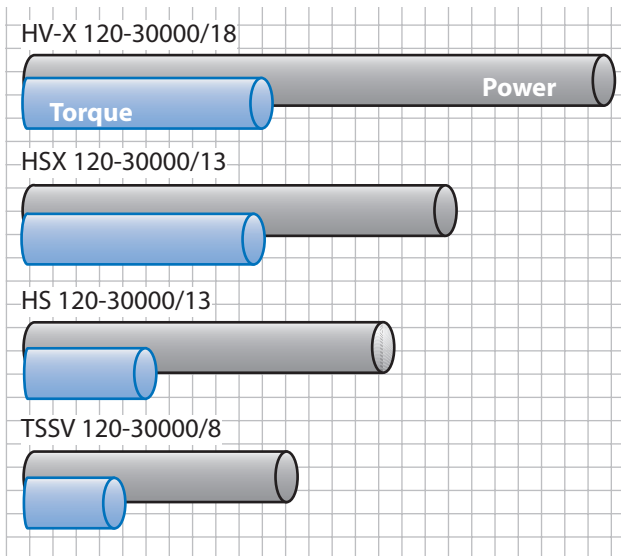

Improvement of the axial and radial stiffness

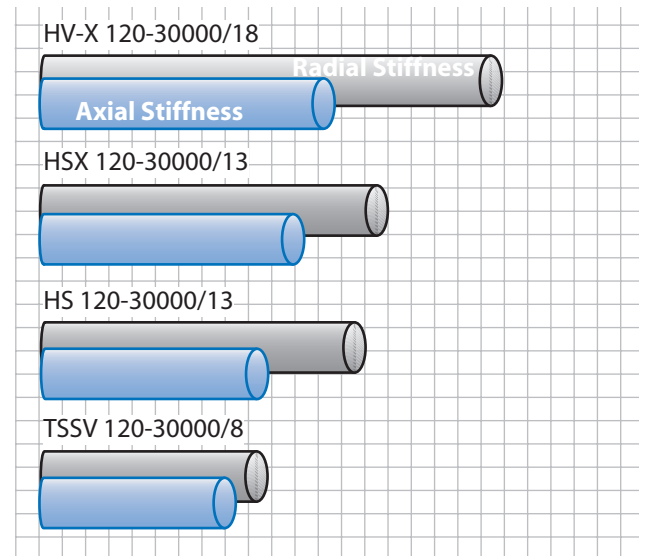

Power, torque and stiffness have been constantly increased as the tables indicate. In addition, reliability, load carrying capacity and working life were also improved. The working life of HSX-spindles in comparison to the HS-spindles is on average 3 times longer.

Economical

With the improvements of power, load carrying capacity and stiffness in the **HV-X** designs the working range of single spindles is extended over the previous models. These enhancements minimize the number of spindles required to cover a large speed range. The special motor design also permits the use of more economically sized frequency converters to match the application requirements.

Selection

The GMN product line covers a vast range of speeds, output powers, load capacities and options to meet or exceed all application requirements.

Tradition

GMN strives to provide its customers with the latest advances and technology in spindle design and concepts. With our **"Customer First" mentality** we will continue to manufacture our traditional style spindles, components and provide service and support for the older models and designs.

Advantages Of Hybrid Ceramic Bearings

GMN high frequency spindles utilize hybrid ceramic ball bearings. These bearings have standard steel bearing races and are matched with silicon nitride balls. Advantages of hybrid bearings compared with normal spindle bearings are:

Reduced wear

The high degree of hardness of the balls, and the nongalling effect of the silicon nitride against metallic material lessens the wear. This is especially important in cases of minimal lubrication. In addition, wear particles will not embed themselves into the balls to further damage the races.

Rigidity

Modulus of elasticity is greater than steel, which increases the static and dynamic stiffness. The increase in dynamic rigidity depends on the ratio of bearing preload to the centrifugal force on the balls.

Friction

Because of the reduced spin-rolls ratios and lower Hertzian stresses, friction and respectively operating temperatures are reduced.

Axial shaft movement

As a result of the lightweight ceramic balls, centrifugal forces are reduced with a corresponding reduction in dynamic movement of bearing races. In addition, movements due to less friction and the lower coefficient of expansion of ceramics are reduced.

Reliability of operation


The low thermal coefficient of expansion of the ceramic balls lessens the reduction of the radial running fits in the bearings. These fits are less variable at higher temperature differentials between races.

Vibrations

Radial forces and the moments acting on the bearings produce displacement between the balls and the retainer. Hybrid bearings reduce this effect and produce a positive influence on cage vibrations and stresses.

Accuracy

High frequency spindles are fitted with bearings produced according to GMN standard grade UP. They are distinguished from international standards due to excellent running accuracy.

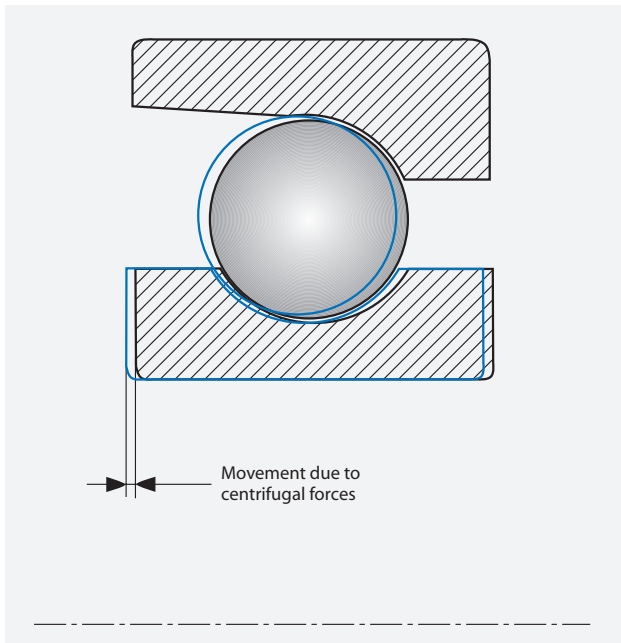


Radial runout of assembled bearing inner ring. Limits in micron [μm]

Bearing bore diameter [mm]	Tolerance class		
	P4/ABEC 7	P2/ABEC 9	UP
> 2.5...10	2.5	1.5	1.5
> 10...18	2.5	1.5	1.5
> 18...30	3.0	2.5	1.5
> 30...50	4.0	2.5	2.0
> 50...80	4.0	2.5	2.0

Assembled bearing outer ring face runout with raceway axial runout. Limits in micron [μm]

Bearing bore diameter [mm]	Tolerance class		
	P4/ABEC 7	P2/ABEC 9	UP
> 6...18	5.0	1.5	2.0
> 18...30	5.0	2.5	2.0
> 30...50	5.0	2.5	2.0
> 50...80	5.0	4.0	3.0
> 80...120	6.0	5.0	3.0


Spring preloaded single bearings

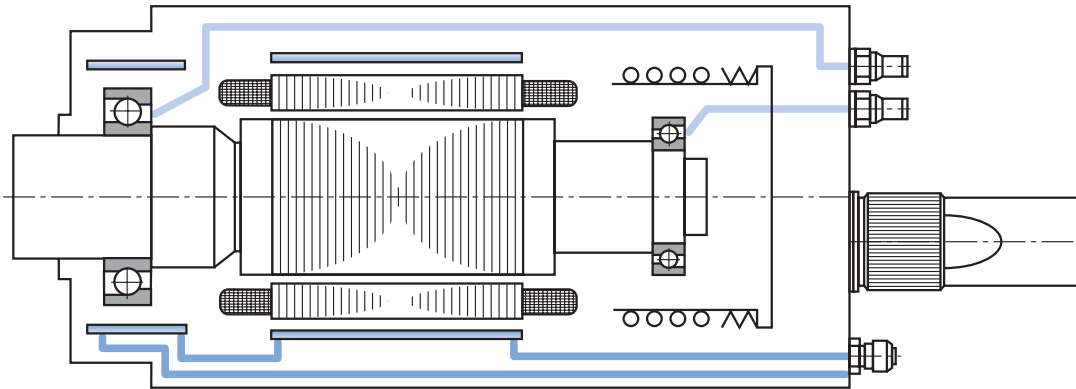

HS 80c - 180000/0.4
HS 80c - 150000/0.5

HS 80c - 120000/1.1
HS 80c - 90000/2

Spring preloaded bearing sets

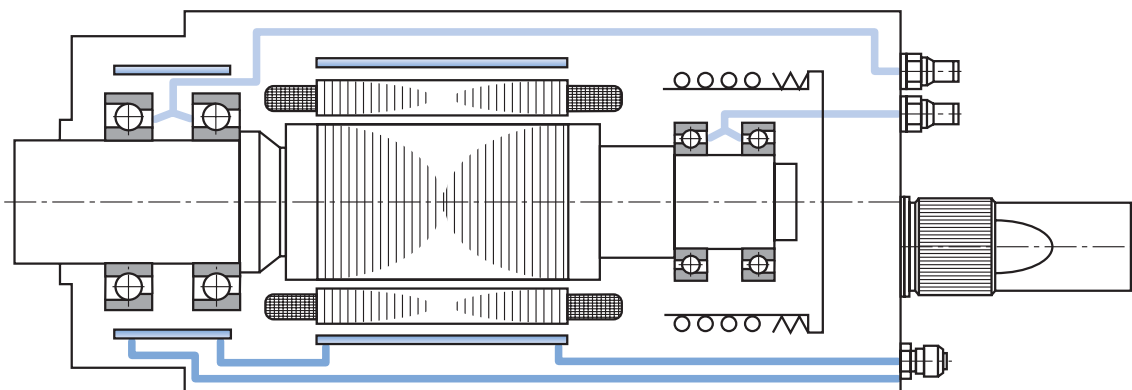


All other spindles

Characteristics

- ▶ Short, rigid construction due to the high-frequency motor being placed between the bearing sets, results in favorable critical speeds, far exceeding the operating speed.
- ▶ High stiffness and load carrying capacities.
- ▶ Low vibration levels due to ultra precision bearings.
- ▶ Monitoring of motor temperature via temperature sensors.
- ▶ Minimal temperature variations due to liquid cooling of the motor and front bearings complement.
- ▶ All mounting and critical datums are hardened and ground for longer service life.
- ▶ Horizontal spindle mounting. Differing position on request.


Lubrication System

Oil/air lubrication

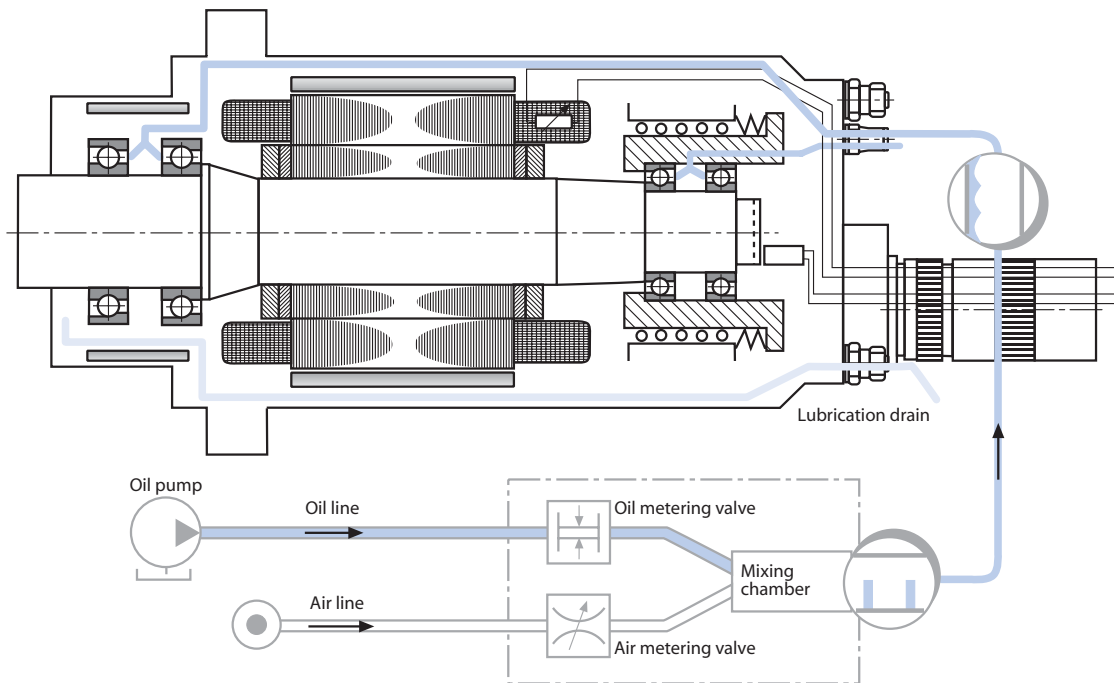


- ▶ High reliability in operation due to separate supply to each bearing group and exact quantity of volume.
- ▶ Ecological compatibility because of minimum oil consumption and elimination of oil mist.
- ▶ Long life and high load carrying capacity as a result of the use of oils with additives like EP and HT.
- ▶ Large spectrum of applicable oils.

Grease lubrication + Air purge

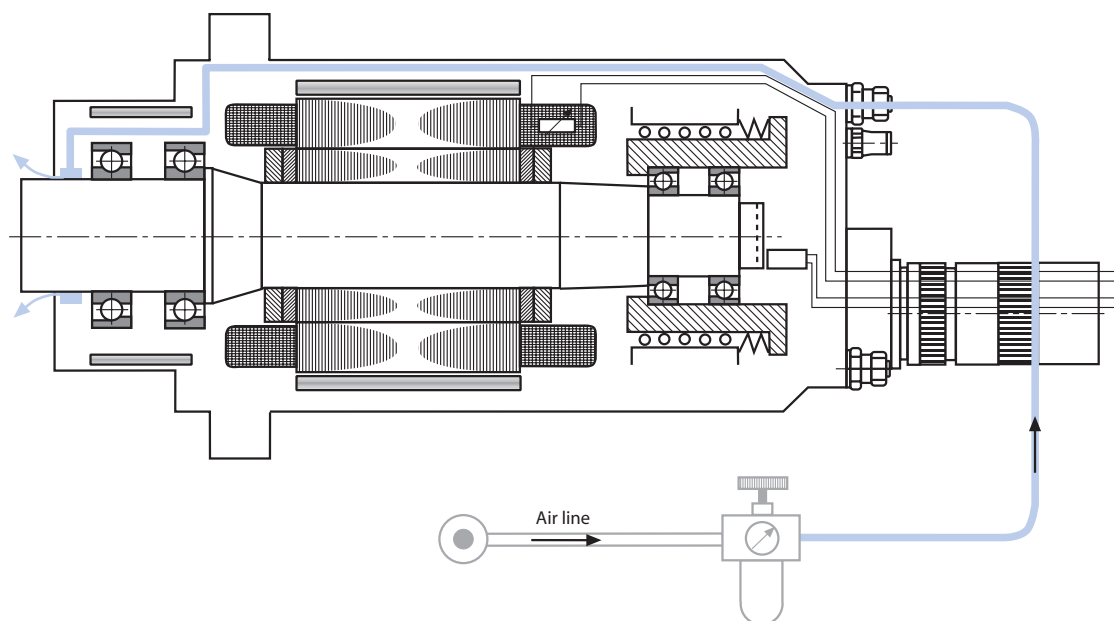


Coolant Through The Shaft (Option)

Coolant through the shaft with gap seal (du)

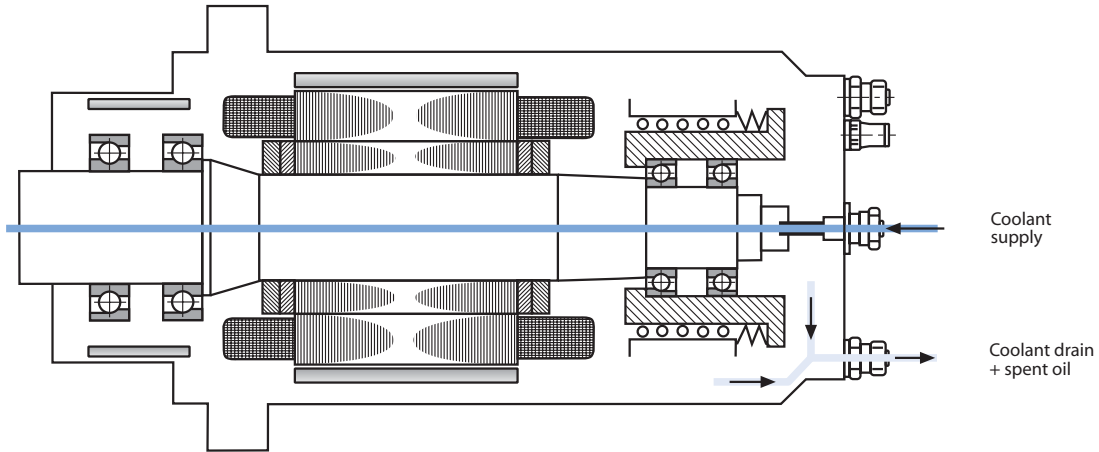



- ▶ Maximum coolant pressure: 4 bar.
- ▶ Can be operated dry.
- ▶ Withstands pressure pulses.
- ▶ Coolant filtration: ≤ 0.1 mm.
- ▶ Horizontal spindle mounting. Differing position on request.

Coolant through the shaft with high pressure rotary union (dh)

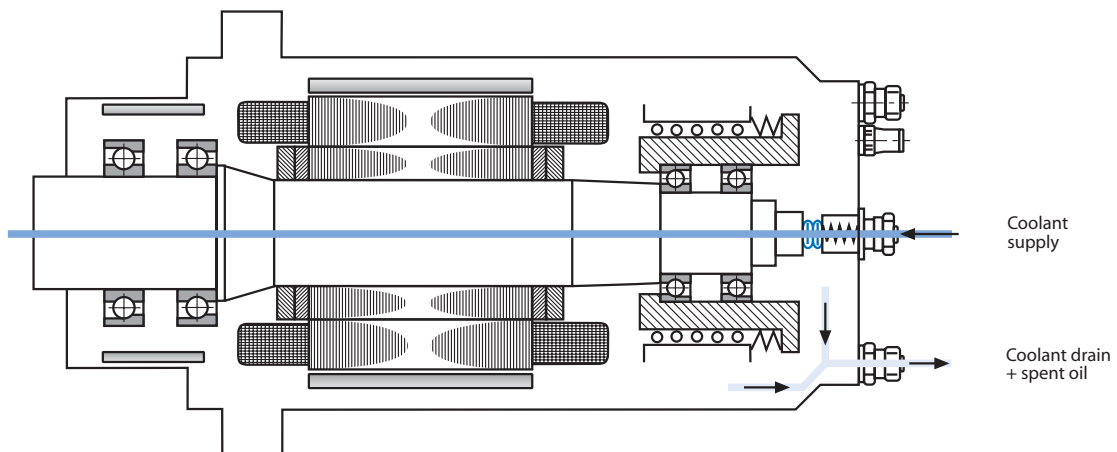



- ▶ Maximum coolant pressure depends on the spindle type and seal design. Please consult GMN.
- ▶ Minimum coolant pressure: 0.5 bar.
- ▶ Can be operated dry.
- ▶ Horizontal spindle mounting. Differing position on request.
- ▶ Pressure pulsing has to be avoided.
- ▶ Coolant filtration: ≤ 0.01 mm.

HS - / HSX - / HV-X - Style

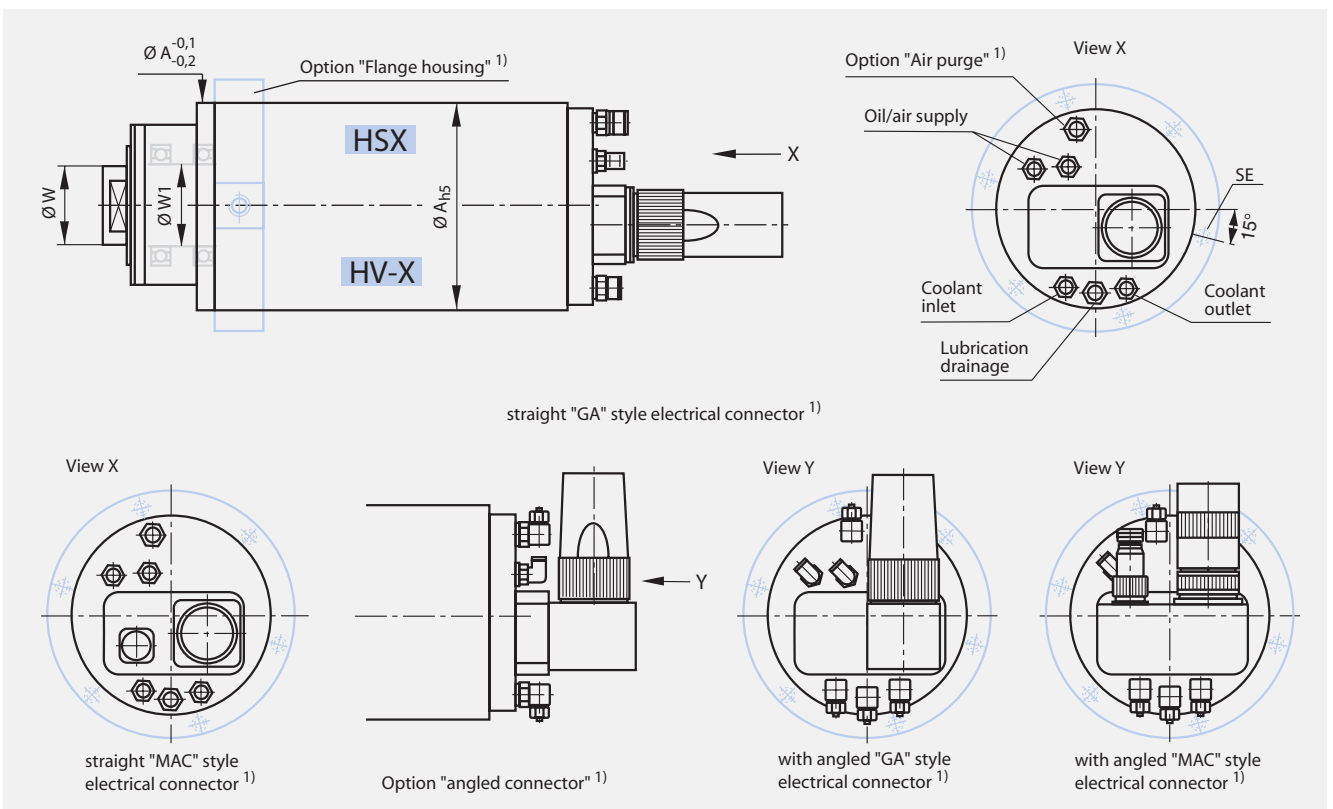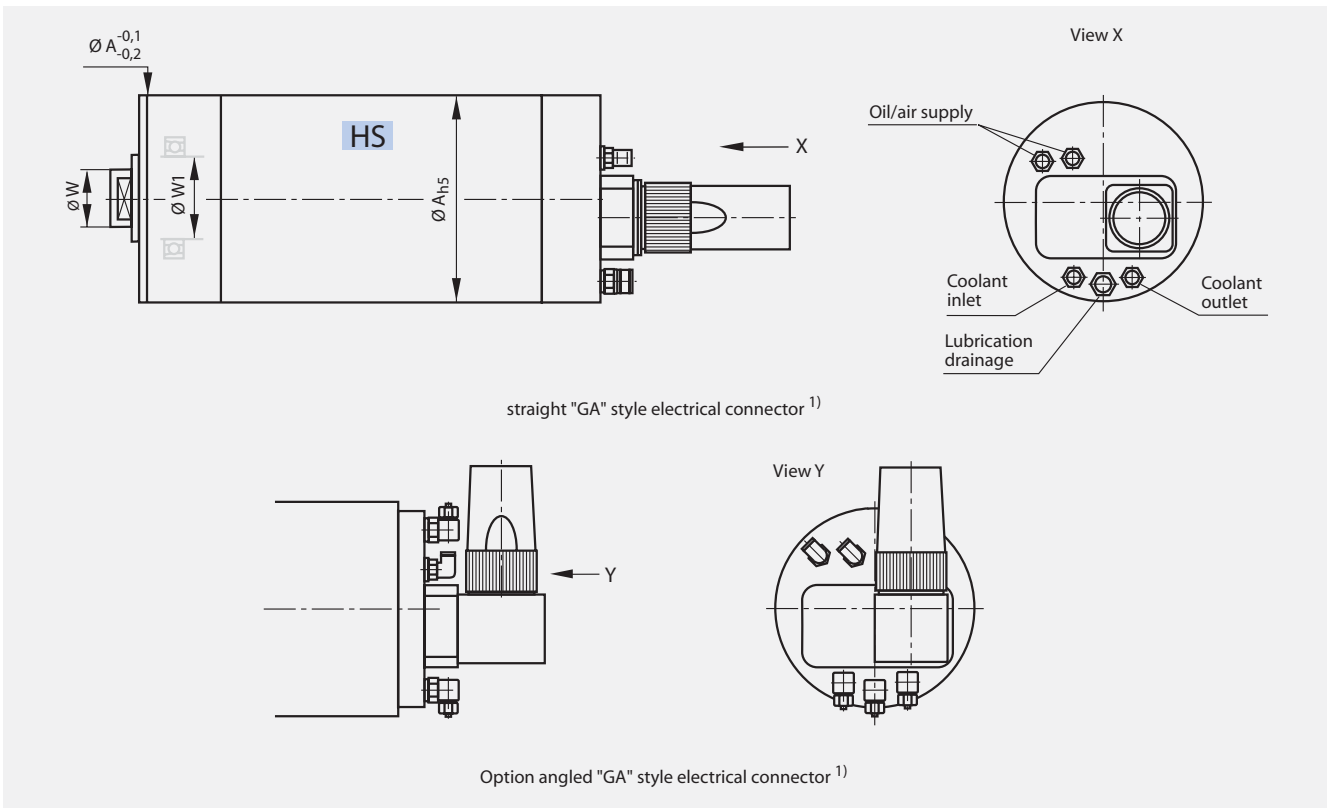



1) Design options see pages 13, 15.

HV-XS - / HS-T - Style

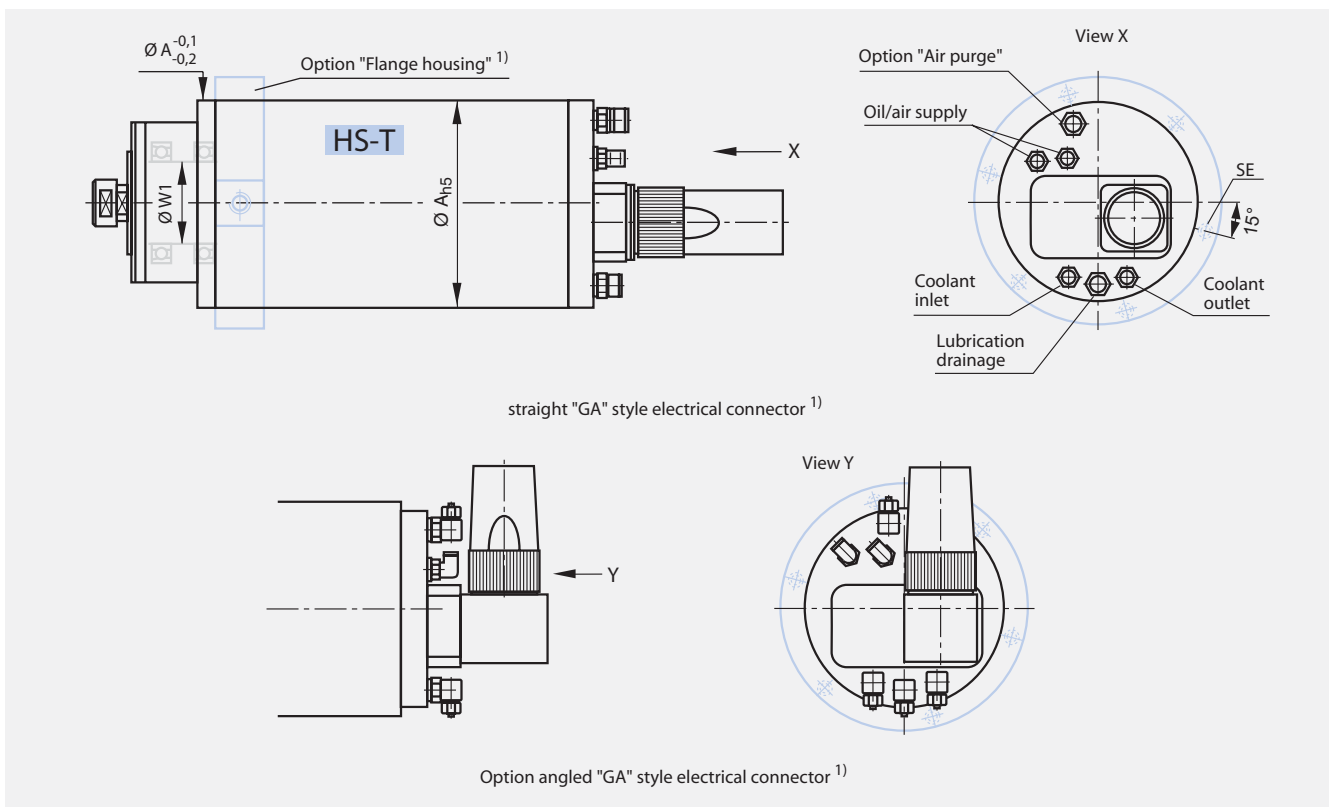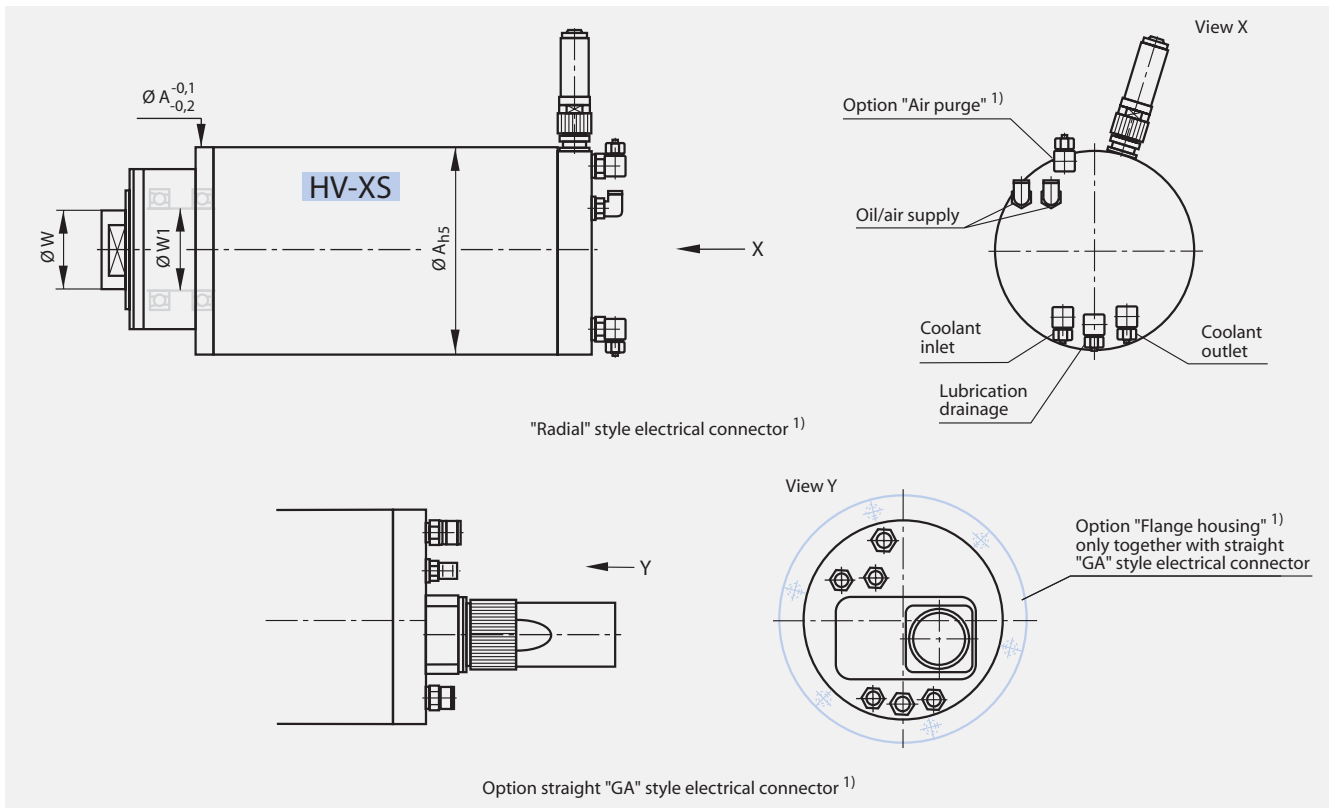


1) Design options see pages 13, 15.

High frequency spindles for manual tool change
HSP - / HV-P - / HSP.g - Style

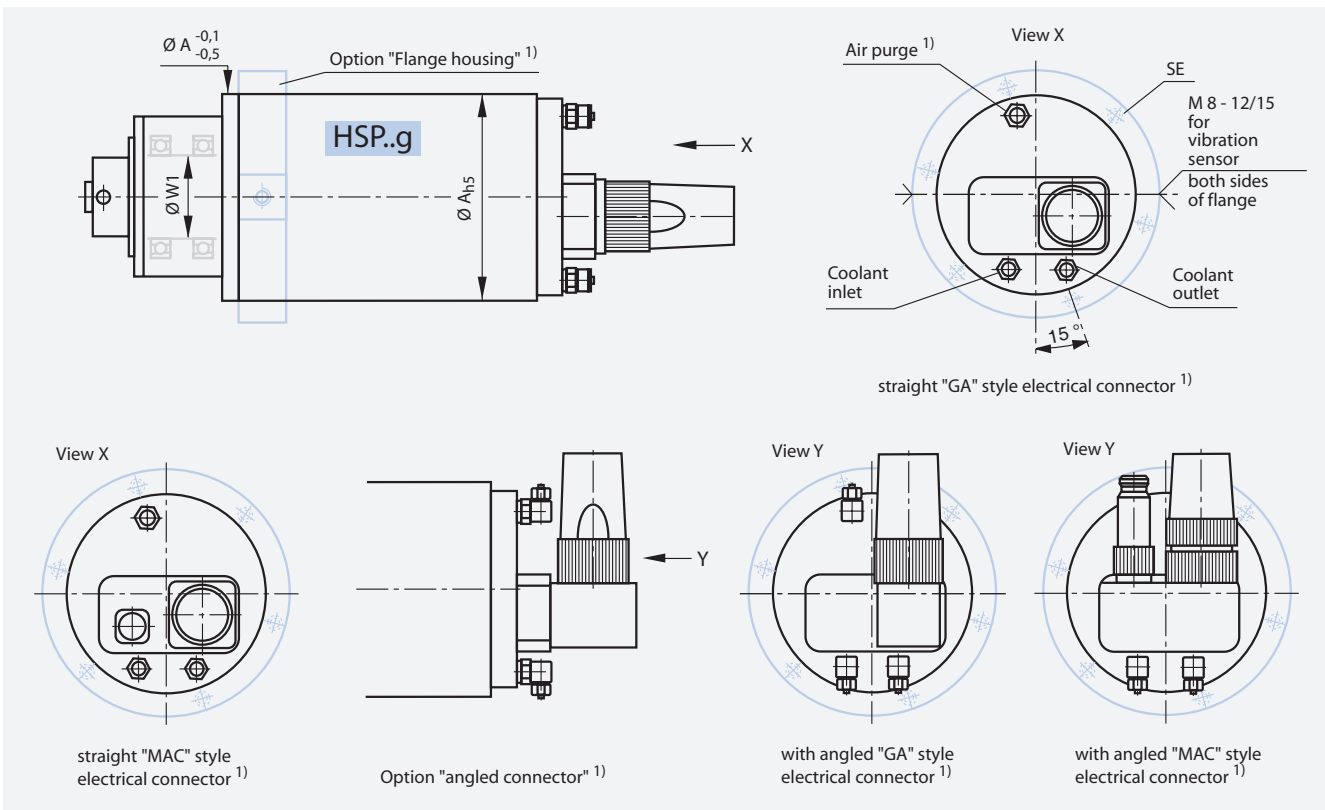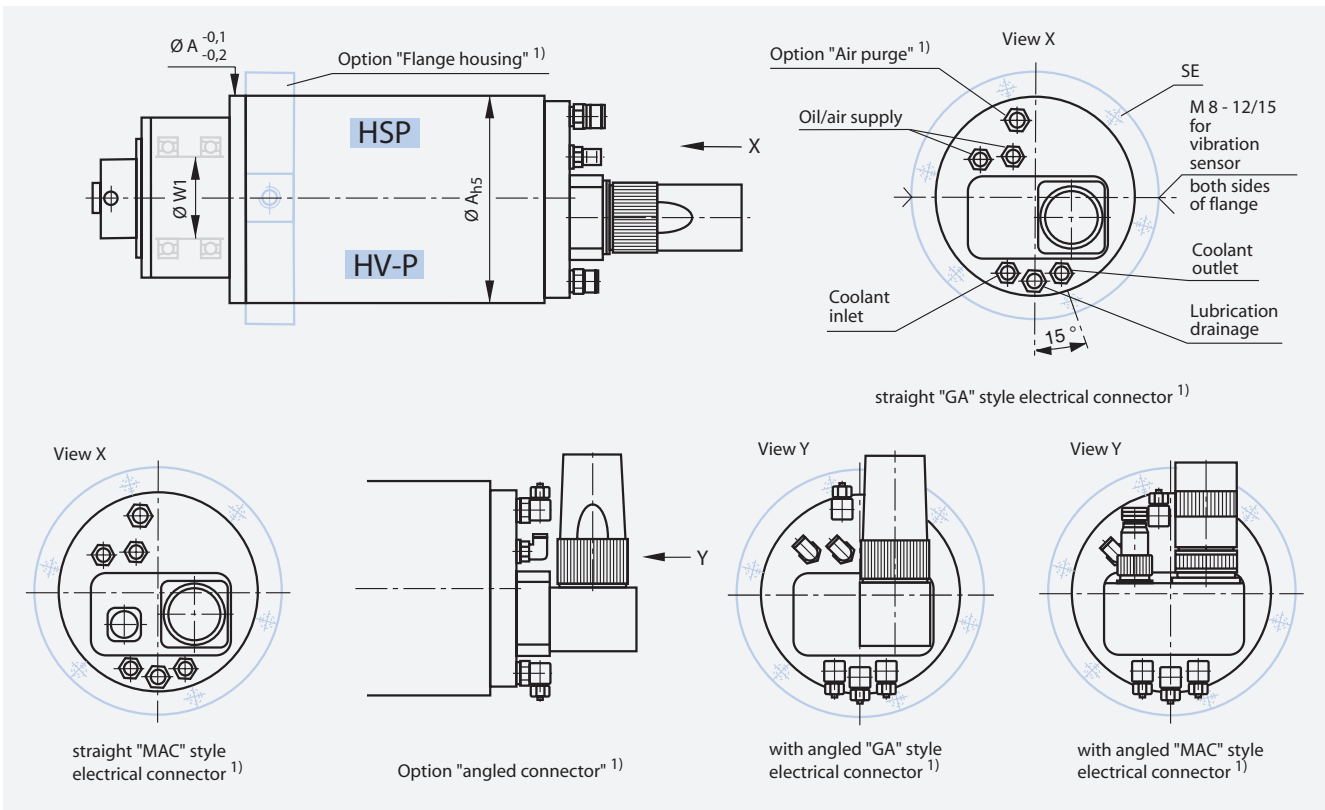

1) Design options see pages 14, 15.

Typical Installation Schematic

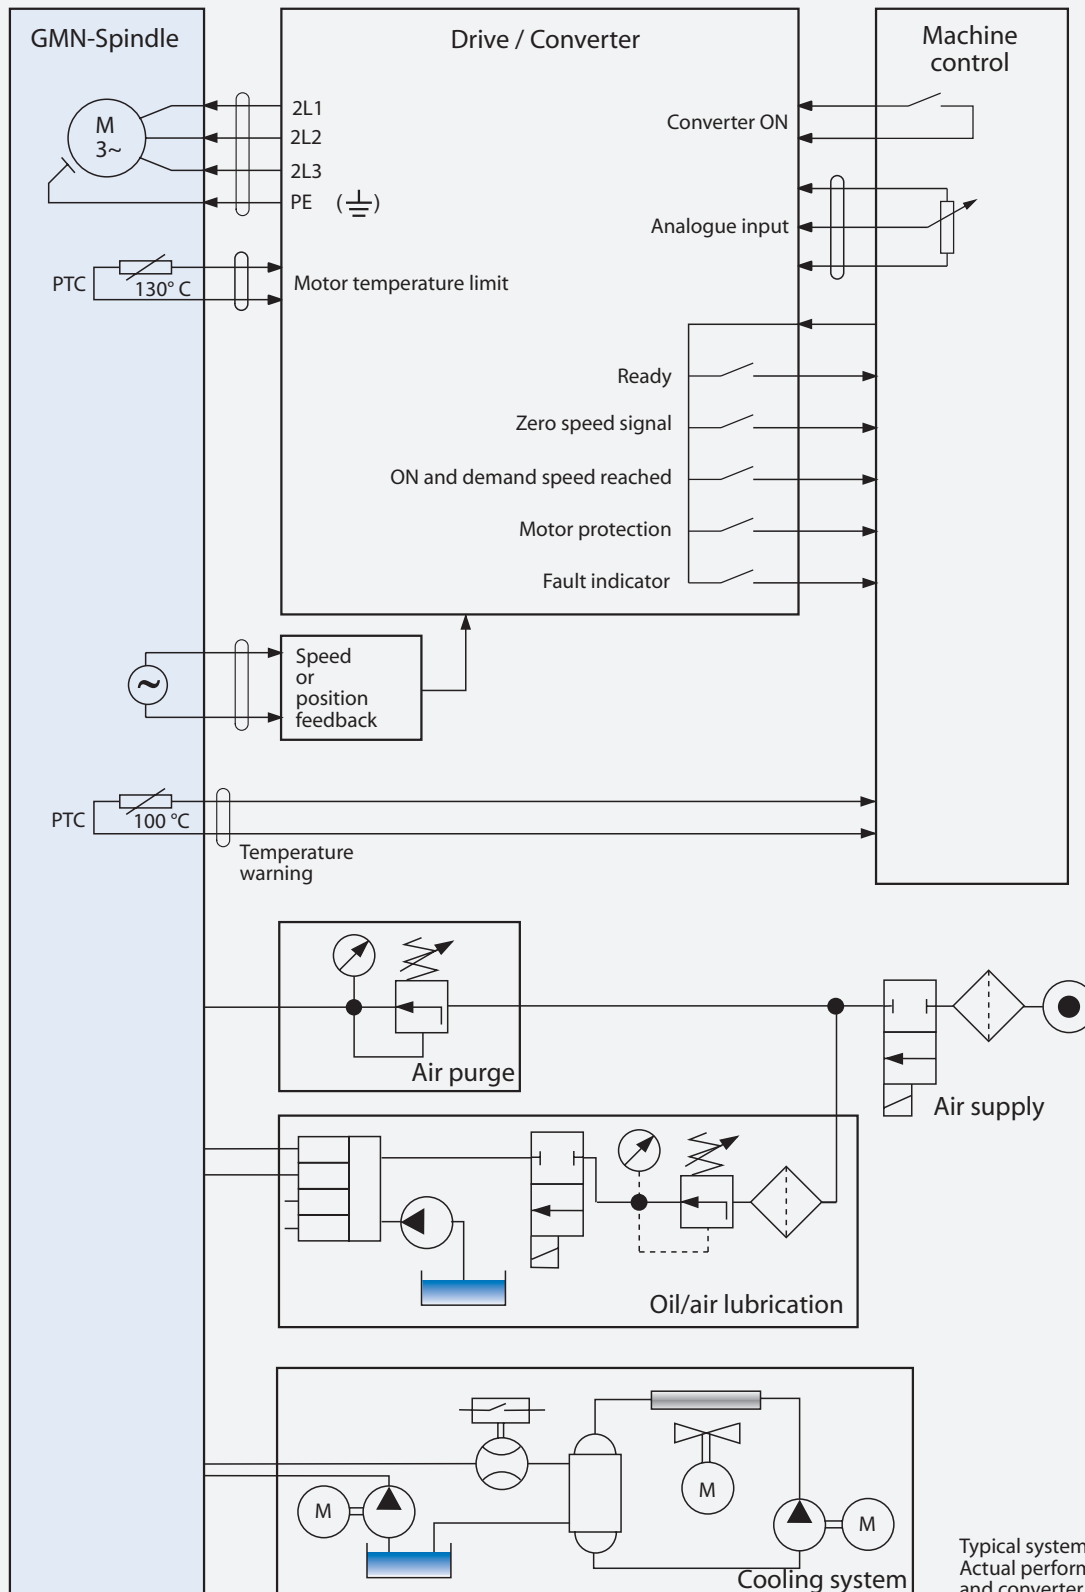

Typical system setup.
Actual performance will be spindle
and converter dependant.

Features

Designation	Tool interface	Features														
											Voltage [V]			Connector type		
		c	du	dh	DrS	DrG	WiS	SpL	Fla	350	220	460	GA	MAC	SV 35	
HS-T 80 - 120000 / 1.1	T 7	x	O	-	*	-	*	O	O	O	x	-	x	-	-	
HS-T 100 - 105000 / 2	T 7	x	O	-	x	-	O	O	O	x	O	*	x	-	-	
HS-T 100 - 90000 / 3	T 9	x	O	-	x	-	O	O	O	x	O	*	x	-	-	
HS-T 100 - 75000 / 5	T 12	x	O	-	x	-	O	O	O	x	O	*	x	-	-	
HS 80c - 180000 / 0.4	D 04/08	x	-	-	*	-	*	-	*	O	x	-	x	-	-	
HS 80c - 150000 / 0.5	D 04/08	x	-	-	*	-	*	-	*	O	x	-	x	-	-	
HS 80c - 120000 / 1.1	D 06/12	x	*	-	*	-	*	-	*	O	x	-	x	-	-	
HS 80c - 90000 / 2	D 08/14	x	*	-	*	-	*	-	*	x	O	-	x	-	-	
HSX 80 - 120000 / 1.1	D 06/12	x	O	-	*	-	*	O	O	O	x	-	x	-	-	
HSX 100 - 105000 / 2	D 08/14	x	O	*	x	-	O	O	O	x	O	*	x	-	-	
HSX 100 - 90000 / 3	D 09/16	x	O	*	x	-	O	O	O	x	O	*	x	-	-	
HSX 100 - 75000 / 5	D 10/18	x	O	*	x	-	O	O	O	x	O	*	x	-	-	
HSX 100 - 60000 / 5	D 14/23	x	O	*	x	-	O	O	O	x	O	*	x	-	-	
HSX 120 - 60000 / 7	D 14/23	x	O	*	x	*	O	O	O	x	O	*	x	-	-	
HSX 120 - 51000 / 12	D 16/28	x	O	*	x	*	O	O	O	x	+	*	x	O	-	
HSX 120 - 42000 / 12	D 22/38	x	O	*	x	*	O	O	O	x	-	*	x	O	-	
HSX 120 - 30000 / 13	D 28/43	x	O	*	x	*	O	O	O	x	-	*	x	O	-	
HSX 150 - 42000 / 16	D 22/38	x	O	-	x	*	O	O	O	x	+	*	-	x	-	
HSX 150 - 42000 / 11	D 22/38	x	O	-	x	*	O	O	O	x	-	*	x	O	-	
HSX 150 - 30000 / 23	D 32/53	x	-	O	x	*	O	O	O	x	-	O	-	x	-	
HSX 150 - 30000 / 16	D 32/53	x	-	O	x	*	O	O	O	x	+	*	x	O	-	
HSX 150 - 24000 / 23	D 36/63	x	-	O	x	*	O	O	O	x	-	O	-	x	-	
HSX 150 - 24000 / 17	D 36/63	x	-	O	x	*	O	O	O	x	+	*	x	O	-	
HSX 150 - 18000 / 17	D 36/63	x	-	O	x	*	O	O	O	x	+	*	x	O	-	
HSX 170 - 30000 / 35	D 32/53	x	-	O	x	*	O	O	O	x	-	O	-	x	-	
HSX 170 - 30000 / 21	D 23/53	x	-	O	x	*	O	O	O	x	-	O	-	x	-	
HSX 170 - 24000 / 35	D 36/63	x	-	O	x	*	O	O	O	x	-	O	-	x	-	
HSX 170 - 24000 / 21	D 36/63	x	-	O	x	*	O	O	O	x	-	O	-	x	-	
HSX 170 - 18000 / 34	D 36/68	x	-	O	x	*	O	O	O	x	-	O	-	x	-	
HSX 170 - 18000 / 23	D 36/68	x	-	O	x	*	O	O	O	x	-	O	-	x	-	

x Standard
O Option
* On request
+ On request, only with reduced output available

c: Hybrid bearings
du: Coolant through shaft
dh: High pressure rotary coolant union
DrG: Encoder

DrS: Speed sensor
WiS: Angled connector
SpL: Air purge
Fla: Flange housing

Colored styles indicate standard features and short delivery times.

Features

Designation	Tool interface	Features													
									Voltage [V]			Connector type			
		c	du	dh	DrS	WiS	SpL	Fla	350	220	460	GA	MAC	SV 35	
HSP 100 - 51000 / 5	HSK-C 25	x	*	-	x	O	*	O	x	O	-	x	-	-	
HSP 100 - 51000 / 3	HSK-C 25	x	*	-	x	O	*	O	x	O	-	x	-	-	
HSP 100 - 42000 / 5	HSK-C 32	x	*	-	x	O	*	O	x	O	-	x	-	-	
HSP 100 - 42000 / 3	HSK-C 32	x	*	-	x	O	*	O	x	O	-	x	-	-	
HSP 120 - 51000 / 11	HSK-C 25	x	O	-	x	O	O	O	x	-	*	x	O	-	
HSP 120 - 51000 / 6	HSK-C 25	x	O	-	x	O	O	O	x	+	*	x	O	-	
HSP 120 - 42000 / 11	HSK-C 32	x	O	-	x	O	O	O	x	-	*	x	O	-	
HSP 120 - 42000 / 6	HSK-C 32	x	O	-	x	O	O	O	x	+	*	x	O	-	
HSP 120 - 30000 / 11	HSK-C 40	x	O	-	x	O	O	O	x	-	*	x	O	-	
HSP 120 - 30000 / 9	HSK-C 40	x	O	-	x	O	O	O	x	+	*	x	O	-	
HSP 150 - 42000 / 14	HSK-C 32	x	O	-	x	O	O	O	x	-	*	O	x	-	
HSP 150 - 42000 / 9	HSK-C 32	x	O	-	x	O	O	O	x	+	*	x	O	-	
HSP 150 - 30000 / 18	HSK-C 50	x	-	O	x	O	O	O	x	-	O	O	x	-	
HSP 150 - 30000 / 9	HSK-C 50	x	-	O	x	O	O	O	x	+	*	x	O	-	
HSP 150 - 24000 / 18	HSK-C 63	x	-	O	x	O	O	O	x	-	O	O	x	-	
HSP 150 - 24000 / 14	HSK-C 63	x	-	O	x	O	O	O	x	+	*	x	O	-	
HSP 170 - 30000 / 32	HSK-C 50	x	-	O	x	O	O	O	x	-	O	-	x	-	
HSP 170 - 30000 / 19	HSK-C 50	x	-	O	x	O	O	O	x	+	*	O	x	-	
HSP 170 - 24000 / 32	HSK-C 63	x	-	O	x	O	O	O	x	-	O	-	x	-	
HSP 170 - 24000 / 19	HSK-C 63	x	-	O	x	O	O	O	x	-	O	O	x	-	
HSP 170 - 18000 / 29	HSK-C 63	x	-	O	x	O	O	O	x	-	O	-	x	-	
HSP 170 - 18000 / 20	HSK-C 63	x	-	O	x	O	O	O	x	-	O	O	x	-	
HSP 230 - 18000 / 45	HSK-C 63	x	-	O	x	O	O	O	x	-	O	-	-	x	
HSP 230 - 18000 / 18	HSK-C 63	x	-	O	x	O	O	O	x	-	O	-	-	x	
HSP 230 - 15000 / 42	HSK-C 80	x	-	O	x	O	O	O	x	-	O	-	-	x	
HSP 230 - 15000 / 25	HSK-C 80	x	-	O	x	O	O	O	x	-	O	-	-	x	
HSP 300 - 12000 / 30	HSK-C 100	x	-	O	x	O	O	O	x	-	O	-	-	x	
HSP 100g - 30000 / 3	HSK-C 25	x	-	-	x	O	x	O	x	*	-	x	-	-	
HSP 100g - 27000 / 3	HSK-C 32	x	-	-	x	O	x	O	x	*	-	x	-	-	
HSP 100g - 21000 / 3	HSK-C 40	x	-	-	x	O	x	O	x	*	-	x	-	-	
HSP 120g - 30000 / 6	HSK-C 25	x	-	-	x	O	x	O	x	*	O	x	O	-	
HSP 120g - 24000 / 6	HSK-C 32	x	-	-	x	O	x	O	x	*	O	x	O	-	
HSP 120g - 21000 / 9	HSK-C 40	x	-	-	x	O	x	O	x	*	O	x	O	-	
HSP 150g - 24000 / 9	HSK-C 32	x	-	-	x	O	x	O	x	-	O	x	O	-	
HSP 150g - 18000 / 9	HSK-C 50	x	-	O	x	O	x	O	x	-	O	x	O	-	
HSP 150g - 15000 / 14	HSK-C 63	x	-	O	x	O	x	O	x	-	O	x	O	-	
HSP 170g - 18000 / 19	HSK-C 50	x	-	O	x	O	x	O	x	-	O	-	x	-	
HSP 170g - 15000 / 19	HSK-C 63	x	-	O	x	O	x	O	x	-	O	-	x	-	
HSP 170g - 12000 / 20	HSK-C 63	x	-	O	x	O	x	O	x	-	O	-	x	-	
HSP 230g - 12000 / 18	HSK-C 63	x	-	O	x	O	x	O	x	-	O	-	-	x	
HSP 230g - 10000 / 25	HSK-C 80	x	-	O	x	O	x	O	x	-	O	-	-	x	
HSP 300g - 8000 / 30	HSK-C 100	x	-	O	x	O	x	O	x	-	O	-	-	x	

x Standard
O Option
* On request
+ On request, only with reduced output available

c: Hybrid bearings
du: Coolant through shaft
dh: High pressure rotary coolant union
DrS: Speed sensor

WiS: Angled connector
SpL: Air purge
Fla: Flange housing

Features

Designation	Tool interface	Features															
											Voltage [V]			Connector type			
		c	du	dh	DrS	DrG	WiS	SpL	Fla	350	220	460	GA	MAC	SV 35	Radial	
HV-X 100 - 105000 / 2	D 09/16	x	O	*	x	-	O	O	O	x	O	*	x	-	-	-	
HV-X 100 - 90000 / 3	D 10/18	x	O	*	x	-	O	O	O	x	O	*	x	-	-	-	
HV-X 100 - 75000 / 5	D 14/23	x	O	*	x	-	O	O	O	x	O	*	x	-	-	-	
HV-X 100 - 60000 / 9	D 16/28	x	O	*	x	-	O	O	O	x	O	*	x	-	-	-	
HV-X 100 - 45000 / 9	D 22/38	x	O	*	x	-	O	O	O	x	O	*	x	-	-	-	
HV-X 100 - 30000 / 9	D 28/43	x	O	*	x	-	O	O	O	x	O	*	x	-	-	-	
HV-X 120 - 75000 / 7	D 14/23	x	O	O	x	O	O	O	O	x	O	O	x	*	-	-	
HV-X 120 - 60000 / 13	D 16/28	x	O	O	x	O	O	O	O	x	+	O	x	*	-	-	
HV-X 120 - 60000 / 12	D 16/28	x	O	O	x	O	O	O	O	x	O	O	x	*	-	-	
HV-X 120 - 45000 / 18	D 28/43	x	O	O	x	O	O	O	O	x	+	O	x	*	-	-	
HV-X 120 - 30000 / 18	D 32/53	x	O	O	x	O	O	O	O	x	+	O	x	*	-	-	
HV-X 150 - 45000 / 36	D 28/43	x	*	O	x	O	O	O	O	x	-	O	-	x	O	-	
HV-X 150 - 45000 / 25	D 28/43	x	*	O	x	O	O	O	O	x	+	O	-	x	O	-	
HV-X 150 - 30000 / 37	D 36/63	x	*	O	x	O	O	O	O	x	-	O	-	x	O	-	
HV-X 150 - 30000 / 26	D 36/63	x	*	O	x	O	O	O	O	x	+	O	-	x	O	-	
HV-XS 120 - 60000 / 7.5	D 16/28	x	O	O	O	-	-	O	O	x	O	O	O	*	-	x	
HV-XS 120 - 45000 / 7.5	D 28/43	x	O	O	O	-	-	O	O	x	O	O	O	*	-	x	
HV-XS 120 - 30000 / 7.5	D 32/53	x	O	O	O	-	-	O	O	x	O	O	O	*	-	x	
HV-P 100 - 60000 / 9	HSK-C 25	x	*	-	x	-	O	O	O	x	O	*	x	-	-	-	
HV-P 100 - 45000 / 9	HSK-C 32	x	*	-	x	-	O	O	O	x	O	*	x	-	-	-	
HV-P 100 - 30000 / 9	HSK-C 40	x	*	-	x	-	O	O	O	x	O	*	x	-	-	-	
HV-P 120 - 60000 / 13	HSK-C 25	x	*	-	x	O	O	O	O	x	+	O	x	*	-	-	
HV-P 120 - 60000 / 12	HSK-C 25	x	*	-	x	O	O	O	O	x	O	O	x	*	-	-	
HV-P 120 - 45000 / 18	HSK-C 40	x	*	O	x	O	O	O	O	x	+	O	x	*	-	-	
HV-P 120 - 30000 / 18	HSK-C 50	x	*	O	x	O	O	O	O	x	+	O	x	*	-	-	
HV-P 150 - 45000 / 36	HSK-C 40	x	*	O	x	O	O	O	O	x	-	O	-	x	O	-	
HV-P 150 - 45000 / 25	HSK-C 40	x	*	O	x	O	O	O	O	x	+	O	-	x	O	-	
HV-P 150 - 30000 / 37	HSK-C 63	x	*	O	x	O	O	O	O	x	-	O	-	x	O	-	
HV-P 150 - 30000 / 26	HSK-C 63	x	*	O	x	O	O	O	O	x	+	O	-	x	O	-	

x Standard
 O Option
 * On request
 + On request, only with reduced output available

c: Hybrid bearings
 du: Coolant through shaft
 dh: High pressure rotary coolant union
 DrG: Encoder

DrS: Speed sensor
 WiS: Angled connector
 SpL: Air purge
 Fla: Flange housing

Colored styles indicate standard features and short delivery times.

HS - / HS-T - / HSX - / HSP - Style

Designation	Tool interface	Designation	Tool interface	Speed max.	Bearing bore	Power specifications								
						D [d] / [W] ¹⁾	HSK T [d] ²⁾	n _{max} [rpm]	W1 [mm]	Static stiffness		Torque	Output S6-60% at speed	
										axial [N/μm]	radial		M _{S6} [Nm]	P _{S6} [kW]
HS 80c - 180000 / 0.4	D 04/08			180 000	8	8	15	0.02	0.4	180 000				
HS 80c - 150000 / 0.5	D 04/08			150 000	8	9	15	0.03	0.5	150 000				
HS 80c - 120000 / 1.1	D 06/12			120 000	12	11	21	0.09	1.1	120 000				
HS 80c - 90000 / 2	D 08/14			90 000	15	17	28	0.21	2	90 000				
HSX 80 - 120000 / 1.1	D 06/12	HS-T 80 - 120000 / 1.1	T 7	120 000	12	22	24	0.09	1.1	120 000				
HSX 100 - 105000 / 2	D 08/14	HS-T 100 - 105000 / 2	T 7	105 000	15	26	29	0.2	2	105 000				
HSX 100 - 90000 / 3	D 09/16	HS-T 100 - 90000 / 3	T 9	90 000	17	36	33	0.3	3	90 000				
HSX 100 - 75000 / 5	D 10/18	HS-T 100 - 75000 / 5	T 12	75 000	20	48	46	0.6	5	75 000				
HSX 100 - 60000 / 5	D 14/23			60 000	25	53	53	0.8	5	60 000				
		HSP 100 - 51000 / 5	HSK-C 25	51 000	30	63	77	1.6	6	36 000				
		HSP 100 - 51000 / 3	HSK-C 25	51 000	30	63	77	1.6	4	24 000				
		HSP 100 - 42000 / 5	HSK-C 32	42 000	35	69	81	1.6	6	36 000				
		HSP 100 - 42000 / 3	HSK-C 32	42 000	35	69	81	1.6	4	24 000				
HSX 120 - 60000 / 7	D 14/23			60 000	25	54	57	1.1	7	60 000				
HSX 120 - 51000 / 12	D 16/28	HSP 120 - 51000 / 11	HSK-C 25	51 000	30	70	102	3.8	12	30 000				
HSX 120 - 42000 / 12	D 22/38	HSP 120 - 42000 / 11	HSK-C 32	42 000	40	90	121	3.8	12	30 000				
HSX 120 - 30000 / 13	D 28/43	HSP 120 - 30000 / 11	HSK-C 40	30 000	45	98	131	6.6	13	18 000				
		HSP 120 - 51000 / 6	HSK-C 25	51 000	30	70	102	3.7	7	18 000				
		HSP 120 - 42000 / 6	HSK-C 32	42 000	40	90	121	3.7	7	18 000				
		HSP 120 - 30000 / 9	HSK-C 40	30 000	45	98	131	6.9	13	18 000				
HSX 150 - 42000 / 16	D 22/38	HSP 150 - 42000 / 14	HSK-C 32	42 000	40	90	147	5.7	16	27 000				
HSX 150 - 42000 / 11	D 22/38			42 000	40	90	147	5.8	11	18 000				
HSX 150 - 30000 / 23	D 32/53	HSP 150 - 30000 / 18	HSK-C 50	30 000	55	111	177	12.2	23	18 000				
HSX 150 - 30000 / 16	D 32/53			30 000	55	111	177	11.3	16	13 500				
HSX 150 - 24000 / 23	D 36/63	HSP 150 - 24000 / 18	HSK-C 63	24 000	65	130	196	12.2	23	18 000				
HSX 150 - 24000 / 17	D 36/63	HSP 150 - 24000 / 14	HSK-C 63	24 000	65	130	196	14.8	17	11 000				
HSX 150 - 18000 / 17	D 36/63			18 000	65	185	218	14.8	17	11 000				
		HSP 150 - 42000 / 9	HSK-C 32	42 000	40	90	147	5.8	11	18 000				
		HSP 150 - 30000 / 9	HSK-C 50	30 000	55	111	177	12.2	14	11 000				
HSX 170 - 30000 / 35	D 32/53	HSP 170 - 30000 / 32	HSK-C 50	30 000	55	111	203	22.3	35	15 000				
HSX 170 - 30000 / 21	D 32/53	HSP 170 - 30000 / 19	HSK-C 50	30 000	55	111	203	22.3	21	9 000				
HSX 170 - 24000 / 35	D 36/63	HSP 170 - 24000 / 32	HSK-C 63	24 000	65	130	231	22.3	35	15 000				
HSX 170 - 24000 / 21	D 36/63	HSP 170 - 24000 / 19	HSK-C 63	24 000	65	130	231	22.3	21	9 000				
HSX 170 - 18000 / 34	D 36/68	HSP 170 - 18000 / 29	HSK-C 63	18 000	70	201	325	29.5	34	11 000				
HSX 170 - 18000 / 23	D 36/68	HSP 170 - 18000 / 20	HSK-C 63	18 000	70	201	325	29.3	23	7 500				

1) See table page 43.

2) See table page 48.

3) For different voltages, see page 13, 14.

HS - / HS-T - / HSX - / HSP - Style

Torque	Power specifications								Tool interface	Designation	Tool interface	Designation		
	Continuous power S1		Voltage at frequency			Current		HSK					T [d]	D [d] / [W]
	M_{S1} [Nm]	P_{S1} [kW]	from ... up to	$U_n^{3)}$ [V]	f_K	f_{max}	I_{S6}							
n_0	n_1													
				220	3 000	2.0						HS 80c - 180000 / 0.4		
				220	2 500	2.5						HS 80c - 150000 / 0.5		
				220	2 000	6.5						HS 80c - 120000 / 1.1		
				350	1 500	6						HS 80c - 90000 / 2		
				220	2 000	6		T 7	HS-T 80 - 120000 / 1.1			HSX 80 - 120000 / 1.1		
0.15	1.7	105 000		350	1 750	6.5	5	T 7	HS-T 100 - 105000 / 2	D 08/14		HSX 100 - 105000 / 2		
0.27	2.5	90 000		350	1 500	9	7.5	T 9	HS-T 100 - 90000 / 3	D 09/16		HSX 100 - 90000 / 3		
0.51	4	75 000		350	1 250	13	10.5	T 12	HS-T 100 - 75000 / 5	D 10/18		HSX 100 - 75000 / 5		
0.64	4	60 000		350	1 000	13	10.5			D 14/23		HSX 100 - 60000 / 5		
1.4	5	36 000	42 000	350	1 200	1 700	18	15	HSK-C 25	HSP 100 - 51000 / 5				
1.4	3	21 000	30 000	350	800	1 700	12	10	HSK-C 25	HSP 100 - 51000 / 3				
1.4	5	36 000	42 000	350	1 200	1 400	18	15	HSK-C 32	HSP 100 - 42000 / 5				
1.4	3	21 000	30 000	350	800	1 400	12	10	HSK-C 32	HSP 100 - 42000 / 3				
1	6	60 000		350	1 000		18	16			D 14/23	HSX 120 - 60000 / 7		
3.5	11	30 000	42 000	350	1 200	1 700	38	36	HSK-C 25	HSP 120 - 51000 / 11	D 16/28	HSX 120 - 51000 / 12		
3.5	11	30 000	42 000	350	1 200	1 400	38	36	HSK-C 32	HSP 120 - 42000 / 11	D 22/38	HSX 120 - 42000 / 12		
5.8	11	18 000	30 000	350	1 200	1 500	48	41	HSK-C 40	HSP 120 - 30000 / 11	D 28/43	HSX 120 - 30000 / 13		
3.2	6	18 000	30 000	350	600	1 700	20	17	HSK-C 25	HSP 120 - 51000 / 6				
3.2	6	18 000	30 000	350	600	1 400	20	17	HSK-C 32	HSP 120 - 42000 / 6				
5.7	9	15 000	24 000	350	900	1 500	36	30	HSK-C 40	HSP 120 - 30000 / 9				
5	14	27 000	42 000	350	1 000	1 400	58	49	HSK-C 32	HSP 150 - 42000 / 14	D 22/38	HSX 150 - 42000 / 16		
5	9.5	18 000	30 000	350	600	1 400	31	27			D 22/38	HSX 150 - 42000 / 11		
9.5	18	18 000	30 000	350	600	1 000	63	49	HSK-C 50	HSP 150 - 30000 / 18	D 32/53	HSX 150 - 30000 / 23		
9.9	14	13 500		350	450	1 000	40	36			D 32/53	HSX 150 - 30000 / 16		
9.5	18	18 000	24 000	350	600	800	63	49	HSK-C 63	HSP 150 - 24000 / 18	D 36/63	HSX 150 - 24000 / 23		
12.2	14	11 000	16 000	350	367	800	45	37	HSK-C 63	HSP 150 - 24000 / 14	D 36/63	HSX 150 - 24000 / 17		
12.2	14	11 000	16 000	350	367	600	45	37			D 36/63	HSX 150 - 18000 / 17		
4.8	9	18 000	30 000	350	600	1 400	36	29	HSK-C 32	HSP 150 - 42000 / 9				
11.5	9	7 500	21 000	350	367	1 000	38	35	HSK-C 50	HSP 150 - 30000 / 9				
20.4	32	15 000	30 000	350	500	1 000	86	80	HSK-C 50	HSP 170 - 30000 / 32	D 32/53	HSX 170 - 30000 / 35		
20.2	19	9 000	18 000	350	300	1 000	53	51	HSK-C 50	HSP 170 - 30000 / 19	D 32/53	HSX 170 - 30000 / 21		
20.4	32	15 000	24 000	350	500	800	86	80	HSK-C 63	HSP 170 - 24000 / 32	D 36/63	HSX 170 - 24000 / 35		
20.2	19	9 000	18 000	350	367	800	53	47	HSK-C 63	HSP 170 - 24000 / 19	D 36/63	HSX 170 - 24000 / 21		
25.2	29	11 000	18 000	350	367	600	78	67	HSK-C 63	HSP 170 - 18000 / 29	D 36/68	HSX 170 - 18000 / 34		
25.5	20	7 500	12 000	350	250	600	58	51	HSK-C 63	HSP 170 - 18000 / 20	D 36/68	HSX 170 - 18000 / 23		

HSP - / HSP.g - Style

Designation	Oil/air lubrication	Designation	Permanent grease lubrication	Tool interface	Bearing bore	Power specifications						
						HSK	W1 [mm]	Static stiffness		Torque	Output S6-60%	
								axial [N/μm]	radial [N/μm]		M _{S6} [Nm]	P _{S6} [kW]
	n _{max} [rpm]		n _{max} [rpm]									
HSP 100 - 51000 / 5	51 000			HSK-C 25	30	63	77	1.6	6	36 000		
HSP 100 - 51000 / 3	51 000	HSP 100g - 30000 / 3	30 000	HSK-C 25	30	63	77	1.6	4	24 000		
HSP 100 - 42000 / 5	42 000			HSK-C 32	35	69	81	1.6	6	36 000		
HSP 100 - 42000 / 3	42 000	HSP 100g - 27000 / 3	27 000	HSK-C 32	35	69	81	1.6	4	24 000		
		HSP 100g - 21000 / 3	21 000	HSK-C 40	45	91	80	3	4.5	15 000		
HSP 120 - 51000 / 11	51 000			HSK-C 25	30	70	102	3.8	12	30 000		
HSP 120 - 51000 / 6	51 000	HSP 120g - 30000 / 6	30 000	HSK-C 25	30	70	102	3.7	7	18 000		
HSP 120 - 42000 / 11	42 000			HSK-C 32	40	90	130	3.8	12	30 000		
HSP 120 - 42000 / 6	42 000	HSP 120g - 24000 / 6	24 000	HSK-C 32	40	90	130	3.7	7	18 000		
HSP 120 - 30000 / 11	30 000			HSK-C 40	45	98	131	6.6	13	18 000		
HSP 120 - 30000 / 9	30 000	HSP 120g - 21000 / 9	21 000	HSK-C 40	45	98	131	6.9	13	18 000		
HSP 150 - 42000 / 14	42 000			HSK-C 32	40	90	147	5.7	16	27 000		
HSP 150 - 42000 / 9	42 000	HSP 150g - 24000 / 9	24 000	HSK-C 32	40	90	147	5.8	11	18 000		
HSP 150 - 30000 / 18	30 000			HSK-C 50	55	111	177	12.2	23	18 000		
HSP 150 - 30000 / 9	30 000	HSP 150g - 18000 / 9	18 000	HSK-C 50	55	111	177	12.2	14	11 000		
HSP 150 - 24000 / 18	24 000			HSK-C 63	65	130	196	12.2	23	18 000		
HSP 150 - 24000 / 14	24 000	HSP 150g - 15000 / 14	15 000	HSK-C 63	65	130	196	14.8	17	11 000		
HSP 170 - 30000 / 32	30 000			HSK-C 50	55	111	203	22.3	35	15 000		
HSP 170 - 30000 / 19	30 000			HSK-C 50	55	111	203	22.3	21	9 000		
HSP 170 - 24000 / 32	24 000			HSK-C 63	65	130	231	22.3	35	15 000		
HSP 170 - 24000 / 19	24 000			HSK-C 63	65	130	231	22.3	21	9 000		
HSP 170 - 18000 / 29	18 000			HSK-C 63	70	172	162	29.5	34	11 000		
HSP 170 - 18000 / 20	18 000			HSK-C 63	70	172	162	29.3	23	7 500		
		HSP 170g - 18000 / 19	18 000	HSK-C 63	55	111	203	21	22	10 000		
		HSP 170g - 15000 / 19	15 000	HSK-C 63	65	130	231	21	22	10 000		
		HSP 170g - 12000 / 20	12 000	HSK-C 63	70	196	325	29.3	23	7 500		
HSP 230 - 18000 / 45	18 000			HSK-C 63	70	196	375	65	50	7 300		
HSP 230 - 18000 / 18	18 000	HSP 230g - 12000 / 18	12 000	HSK-C 63	70	196	375	65	20	2 900		
HSP 230 - 15000 / 42	15 000			HSK-C 80	90	461	483	95	47	4 700		
HSP 230 - 15000 / 25	15 000	HSP 230g - 10000 / 25	10 000	HSK-C 80	90	461	483	95	28	2 800		
HSP 300 - 12000 / 30	12 000	HSP 300g - 8000 / 30	8 000	HSK-C 100	110	607	660	325	34	1 000		

1) For different voltages, see page 14.

HSP - / HSP.g - Style

Torque	Power specifications								Tool interface	Designation	Designation	
	M _{S1} [Nm]	Continuous power S1			Voltage 350 V ¹⁾ at frequency			Current				
		P _{S1} [kW]	n ₀ [rpm]	from up to Oil/air n ₁ [rpm]	Grease n ₁ [rpm]	f _K [Hz]	from up to Oil/air f _{max} [Hz]	Grease f _{max} [Hz]				I _{S6} [A]
HSK												
1.4	5	36 000	42 000		1 200	1 700		18	15	HSK-C 25		HSP 100 - 51000 / 5
1.4	3	21 000	30 000	30 000	800	1 700	1 000	12	10	HSK-C 25	HSP 100g - 30000 / 3	HSP 100 - 51000 / 3
1.4	5	36 000	42 000		1 200	1 400		18	15	HSK-C 32		HSP 100 - 42000 / 5
1.4	3	21 000	30 000	27 000	800	1 400	900	12	10	HSK-C 32	HSP 100g - 27000 / 3	HSP 100 - 42000 / 3
2.4	3	12 000		21 000	500		700	12	10	HSK-C 40	HSP 100g - 21000 / 3	
3.5	11	30 000	42 000		1 200	1 700		38	36	HSK-C 25		HSP 120 - 51000 / 11
3.2	6	18 000	30 000	30 000	600	1 700	1 000	20	17	HSK-C 25	HSP 120g - 30000 / 6	HSP 120 - 51000 / 6
3.5	11	30 000	42 000		1 200	1 400		38	36	HSK-C 32		HSP 120 - 42000 / 11
3.2	6	18 000	30 000	24 000	600	1 400	800	20	17	HSK-C 32	HSP 120g - 24000 / 6	HSP 120 - 42000 / 6
5.8	11	18 000	30 000		1 200	1 500		48	41	HSK-C 40		HSP 120 - 30000 / 11
5.7	9	15 000	24 000	21 000	900	1 500	1 050	48	40	HSK-C 40	HSP 120g - 21000 / 9	HSP 120 - 30000 / 9
5	14	27 000	42 000		1 000	1 400		58	49	HSK-C 32		HSP 150 - 42000 / 14
4.8	9	18 000	30 000	24 000	600	1 400	800	36	29	HSK-C 32	HSP 150g - 24000 / 9	HSP 150 - 42000 / 9
9.5	18	18 000	30 000		600	1 000		63	49	HSK-C 50		HSP 150 - 30000 / 18
11.5	9	7 500	21 000	18 000	367	1 000	600	38	35	HSK-C 50	HSP 150g - 18000 / 9	HSP 150 - 30000 / 9
9.5	18	18 000	24 000		600	800		63	49	HSK-C 63		HSP 150 - 24000 / 18
12.2	14	11 000	16 000	15 000	367	800	500	45	37	HSK-C 63	HSP 150g - 15000 / 14	HSP 150 - 24000 / 14
20.4	32	15 000	30 000		500	1 000		86	80	HSK-C 50		HSP 170 - 30000 / 32
20.2	19	9 000	18 000		300	1 000		53	51	HSK-C 50		HSP 170 - 30000 / 19
20.4	32	15 000	24 000		500	800		86	80	HSK-C 63		HSP 170 - 24000 / 32
20.2	19	9 000	18 000		367	800		53	47	HSK-C 63		HSP 170 - 24000 / 19
25.5	29	11 000	18 000		367	600		78	67	HSK-C 63		HSP 170 - 18000 / 29
25.5	20	7 500	12 000		250	600		58	51	HSK-C 63		HSP 170 - 18000 / 20
20	19	9 000		18 000	367		600	53	47	HSK-C 63	HSP 170g - 18000 / 19	
20	19	9 000		15 000	367		500	53	47	HSK-C 63	HSP 170g - 15000 / 19	
25.5	20	7 500		12 000	250		400	58	51	HSK-C 63	HSP 170g - 12000 / 20	
59	45	7 300	13 000		250	600		108	98	HSK-C 63		HSP 230 - 18000 / 45
59	18	2 900	9 000	9 000	145	600	400	64	57	HSK-C 63	HSP 230g - 12000 / 18	HSP 230 - 18000 / 18
85	42	4 700	12 000		200	500		107	96	HSK-C 80		HSP 230 - 15000 / 42
85	25	2 800	8 000	8 000	134	500	333	77	69	HSK-C 80	HSP 230g - 10000 / 25	HSP 230 - 15000 / 25
286	30	1 000	10 000	8 000	90	600	400	136	120	HSK-C 100	HSP 300g - 8000 / 30	HSP 300 - 12000 / 30

Designation	Tool interface	Designation	Tool interface	Speed max.	Bearing bore	Power specifications							
						HSK	n _{max} [rpm]	W1 [mm]	Static stiffness		Torque	Output S6-60%	
									axial [N/μm]	radial [N/μm]		M _{S6} [Nm]	P _{S6} [kW]
HV-X 100 - 105000/2	D 09/16			105 000	17		33	35	0.18	2	105 000		
HV-X 100 - 90000/3	D 10/18			90 000	20		37	40	0.3	3	90 000		
HV-X 100 - 75000/5	D 14/23			75 000	25		53	56	0.6	5	75 000		
HV-X 100 - 60000/9	D 16/28	HV-P 100 - 60000/9	HSK-C 25	60 000	30		62	73	1.7	9	51 000		
HV-X 100 - 45000/9	D 22/38	HV-P 100 - 45000/9	HSK-C 32	45 000	40		76	85	2.9	9	30 000		
HV-X 100 - 30000/9	D 28/43	HV-P 100 - 30000/9	HSK-C 40	30 000	45		80	74	4.1	9	21 000		
HV-X 120 - 75000/7	D 14/23			75 000	25		54	68	0.9	7	75 000		
HV-X 120 - 60000/13	D 16/28	HV-P 120 - 60000/13	HSK-C 25	60 000	30		69	97	4.1	13	30 000		
HV-X 120 - 60000/12	D 16/28	HV-P 120 - 60000/12	HSK-C 25	60 000	30		69	97	2.2	12	51 000		
HV-X 120 - 45000/18	D 28/43	HV-P 120 - 45000/18	HSK-C 40	45 000	45		91	125	5.7	18	30 000		
HV-X 120 - 30000/18	D 32/53	HV-P 120 - 30000/18	HSK-C 50	30 000	55		99	145	7.2	18	24 000		
HV-X 150 - 45000/36	D 28/43	HV-P 150 - 45000/36	HSK-C 40	45 000	45		91	150	11.5	36	30 000		
HV-X 150 - 45000/25	D 28/43	HV-P 150 - 45000/25	HSK-C 40	45 000	45		91	150	11.4	25	21 000		
HV-X 150 - 30000/37	D 36/63	HV-P 150 - 30000/37	HSK-C 63	30 000	65		121	197	16.8	37	21 000		
HV-X 150 - 30000/26	D 36/63	HV-P 150 - 30000/26	HSK-C 63	30 000	65		121	197	16.5	26	15 000		
HV-XS 120 - 60000/7.5	D 16/28			60 000	30		63	90	2.2	7.5	33 000		
HV-XS 120 - 45000/7.5	D 28/43			45 000	45		91	130	4	7.5	18 000		
HV-XS 120 - 30000/7.5	D 32/53			30 000	55		102	160	4	7.5	18 000		

1) See table page 43.

2) For different voltages, see page 15.


Torque	Power specifications								Tool interface	Designation	Tool interface	Designation	
	Continuous power S1		Voltage at frequency			Current		HSK					D [d] / [W]
	M_{S1} [Nm]	P_{S1} [kW]	from ... up to		$U_n^{2)}$ [V]	from ... up to							
n_0 [rpm]	n_1	f_K [Hz]	f_{max}										
0.16	1.8	105 000		350	1 750		6	5.5			D 09/16	HV-X 100 - 105000 / 2	
0.26	2.5	90 000		350	1 500		9	7.5			D 10/18	HV-X 100 - 90000 / 3	
0.5	4	75 000		350	1 250		13	10.5			D 14/23	HV-X 100 - 75000 / 5	
1.4	7.5	51 000	60 000	350	1 700	2 000	28	24	HSK-C 25	HV-P 100 - 60000 / 9	D 16/28	HV-X 100 - 60000 / 9	
2.4	7.5	30 000	45 000	350	1 000	1 500	28	24	HSK-C 32	HV-P 100 - 45000 / 9	D 22/38	HV-X 100 - 45000 / 9	
3.4	7.5	21 000	30 000	350	700	1 000	30	28	HSK-C 40	HV-P 100 - 30000 / 9	D 28/43	HV-X 100 - 30000 / 9	
0.8	6	75 000		350	1 250		24	18			D 14/23	HV-X 120 - 75000 / 7	
3.5	11	30 000	43 000	350	1 000	2 000	37	33	HSK-C 25	HV-P 120 - 60000 / 13	D 16/28	HV-X 120 - 60000 / 13	
2	10.5	51 000	60 000	350	850	1 000	29	25	HSK-C 25	HV-P 120 - 60000 / 12	D 16/28	HV-X 120 - 60000 / 12	
4.8	15	30 000	45 000	350	1 000	1 500	51	41	HSK-C 40	HV-P 120 - 45000 / 18	D 28/43	HV-X 120 - 45000 / 18	
6	15	24 000	30 000	350	800	1 000	51	41	HSK-C 50	HV-P 120 - 30000 / 18	D 32/53	HV-X 120 - 30000 / 18	
10.2	32	30 000	45 000	350	1 000	1 500	95	87	HSK-C 40	HV-P 150 - 45000 / 36	D 28/43	HV-X 150 - 45000 / 36	
10	22	21 000	30 000	350	700	1 500	67	60	HSK-C 40	HV-P 150 - 45000 / 25	D 28/43	HV-X 150 - 45000 / 25	
15	33	21 000	30 000	350	700	1 000	92	84	HSK-C 63	HV-P 150 - 30000 / 37	D 36/63	HV-X 150 - 30000 / 37	
14.7	23	15 000	22 000	350	500	1 000	67	60	HSK-C 63	HV-P 150 - 30000 / 26	D 36/63	HV-X 150 - 30000 / 26	
1.9	6.5	33 000	60 000	350	690	1 000	22	20				HV-XS 120 - 60000 / 7.5	
3.4	6.5	18 000	43 000	350	790	1 500	28	25				HV-XS 120 - 45000 / 7.5	
3.4	6.5	18 000	30 000	350	667	1 000	23	21				HV-XS 120 - 30000 / 7.5	

Power

Chip removal processes are defined by the material being processed, tool sizes and recommended cutting speeds.

Small diameter tooling requires high speeds, while large diameter cutters need high torque at lower speeds.


The "field weakening" characteristics offer high torque at low speeds and are also capable of high spindle speeds utilizing the same spindle.

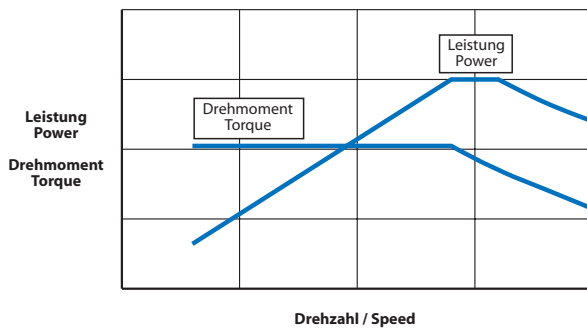

Rigidity required for the volume of material to be removed and also provide a quality finish, this demands larger shaft diameters, thereby spindles become, which allows for longer and more powerful motors.

Because of progress in the development of motors, the power density has been increased to such an extent that, in many cases, the power which can be produced from these proportions is not need for processing.


On the other hand, oversized systems cause increase costs because of the size of the frequency converter which are required.

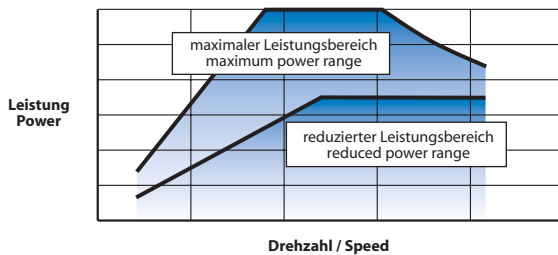

Therefore the spindles can be operated with smaller converters at different levels. The capacity of the converter determines the power profile.

The output power of the motor is produced via the converter being programmed to the proper volts/frequency [v/f] ratio specified in the instruction manual or test report of spindle.

Operation with reduced output power up to various speeds

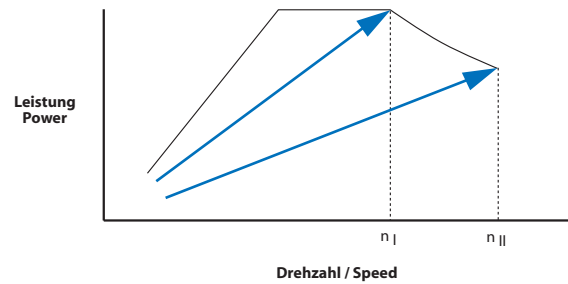


Costs of frequency converters can be reduced by accepting the decreased output power and possibly lower frequency.

Operation mode S1 and S6-60%


Operation mode S1




Operation mode S6-60%




Power Characteristics

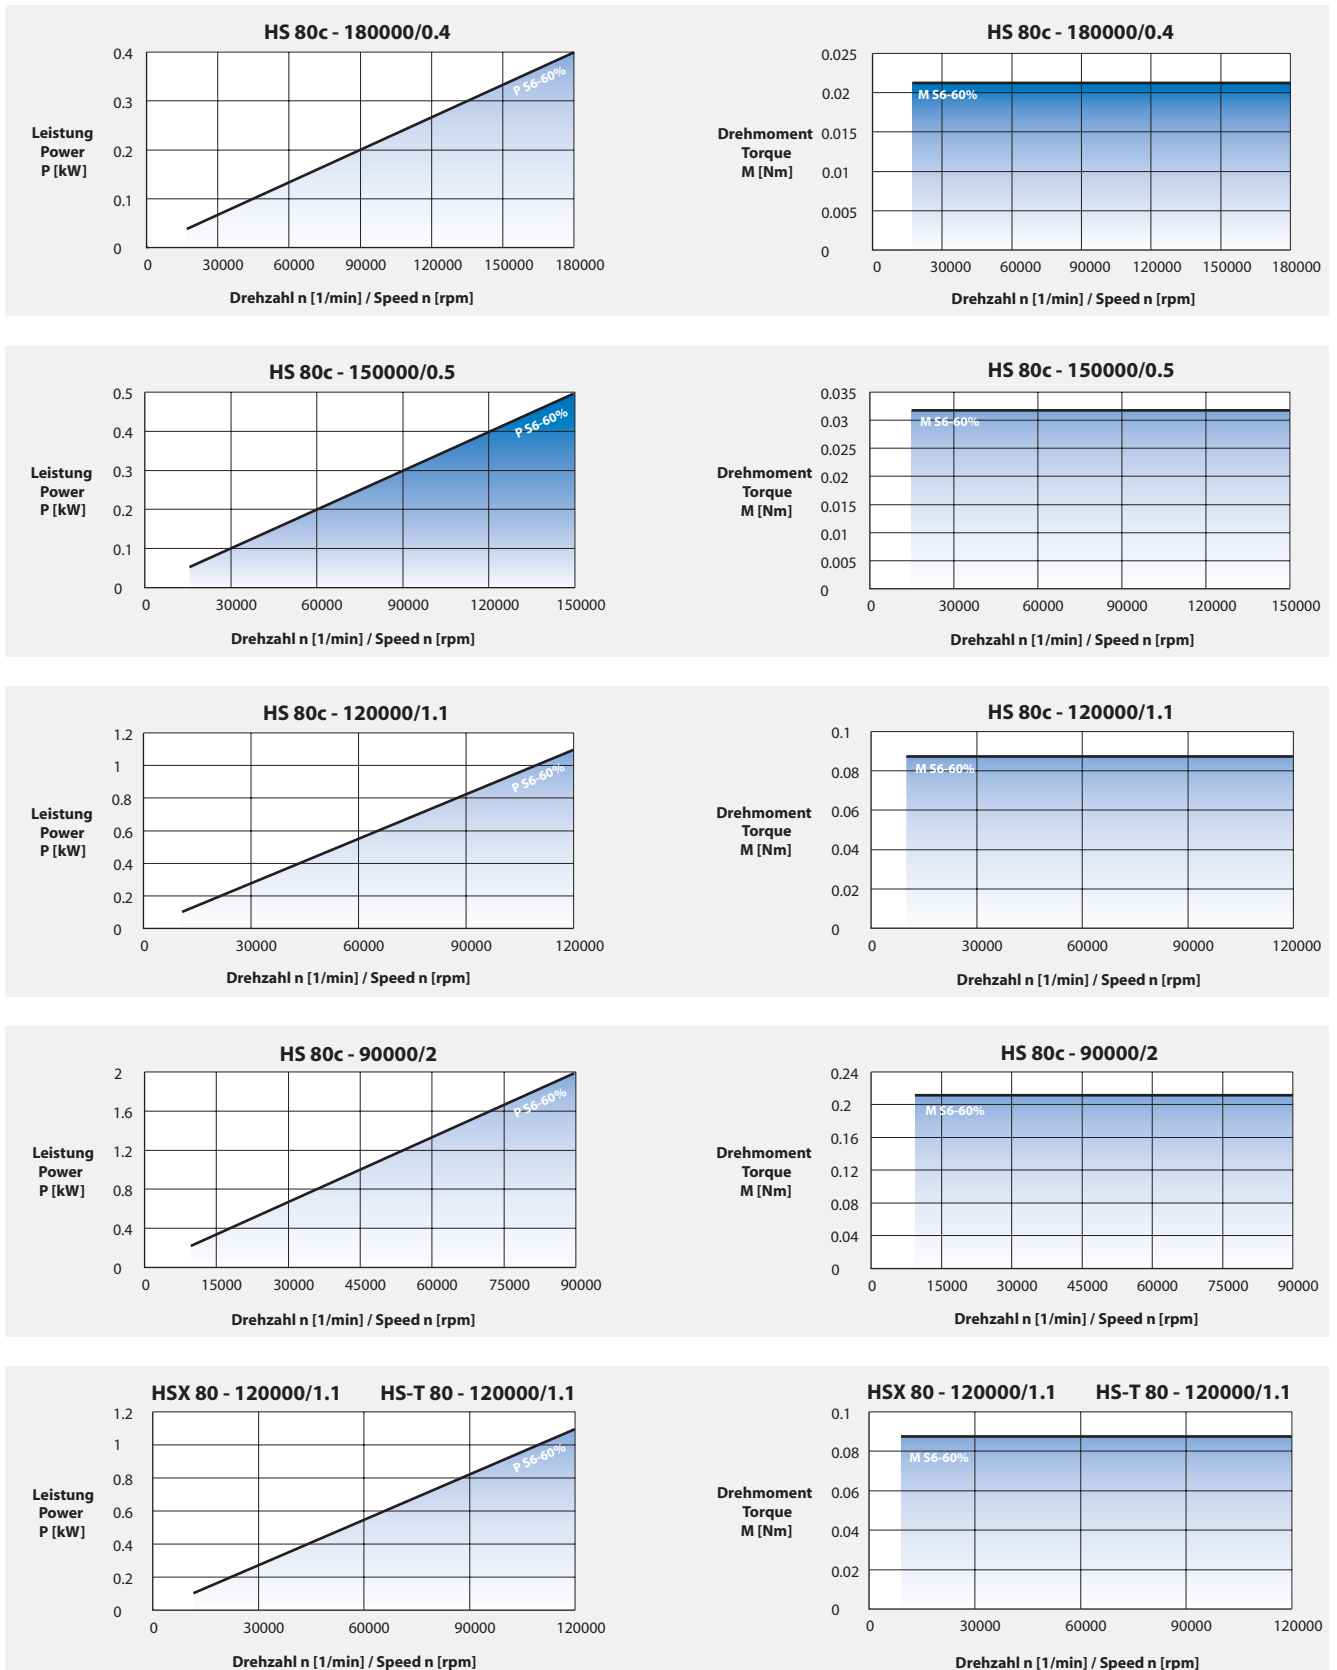


Power Characteristics

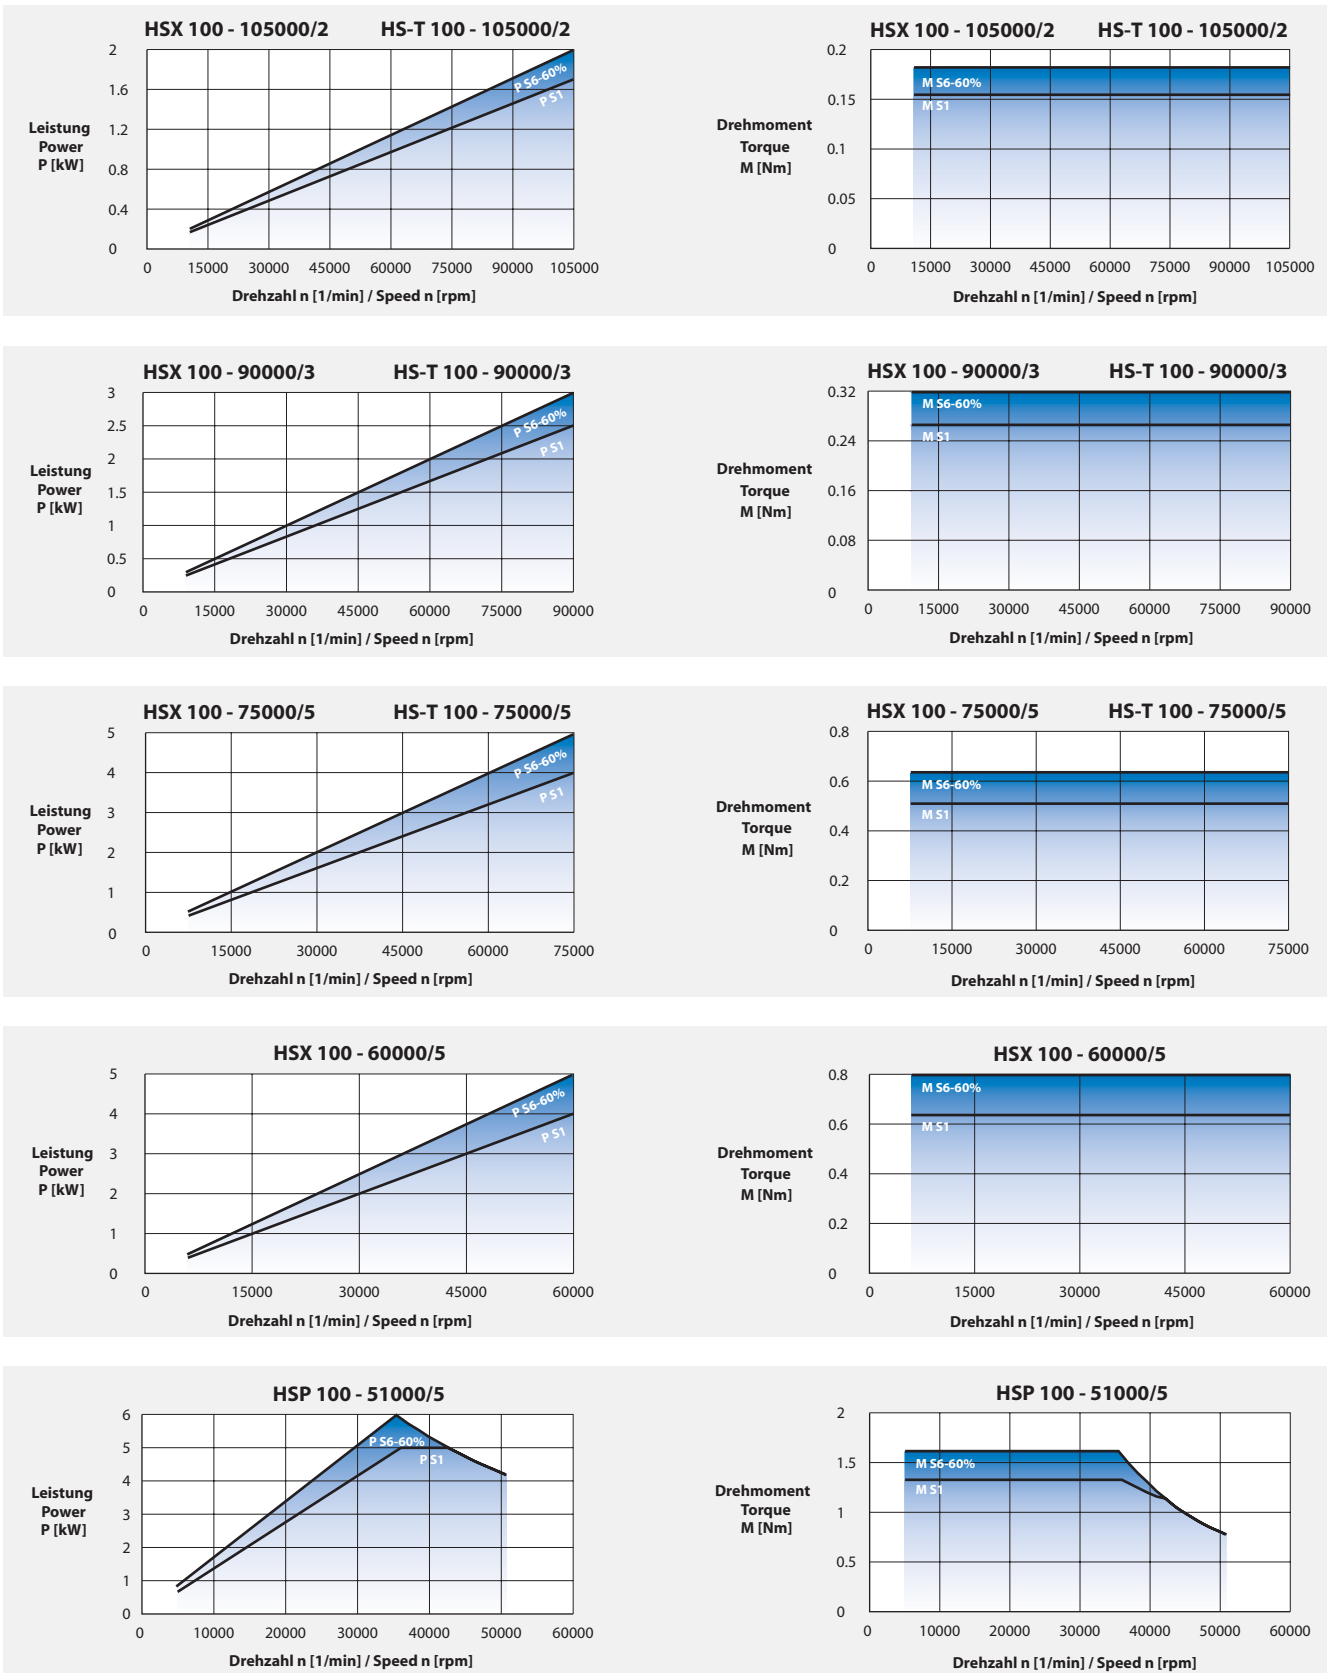











Power Characteristics

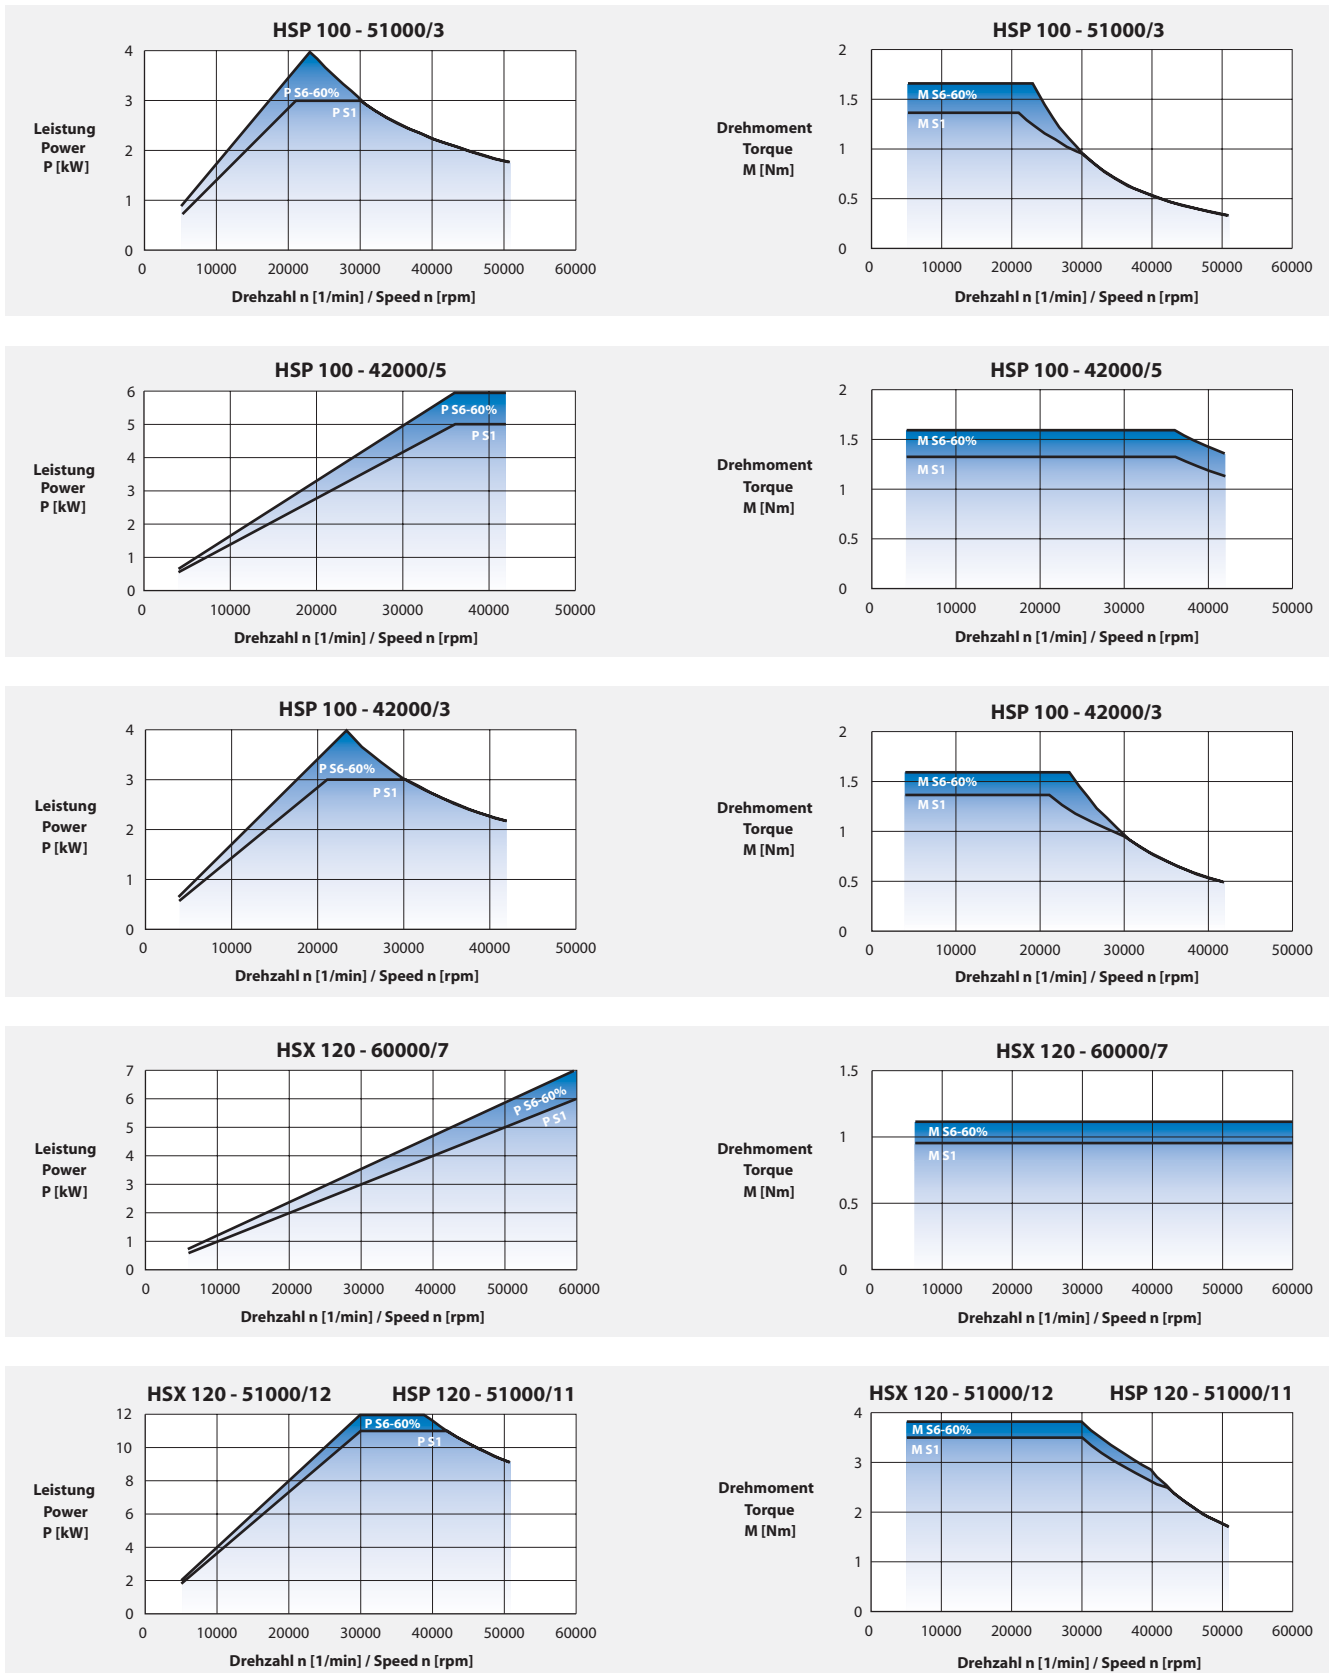


Power Characteristics

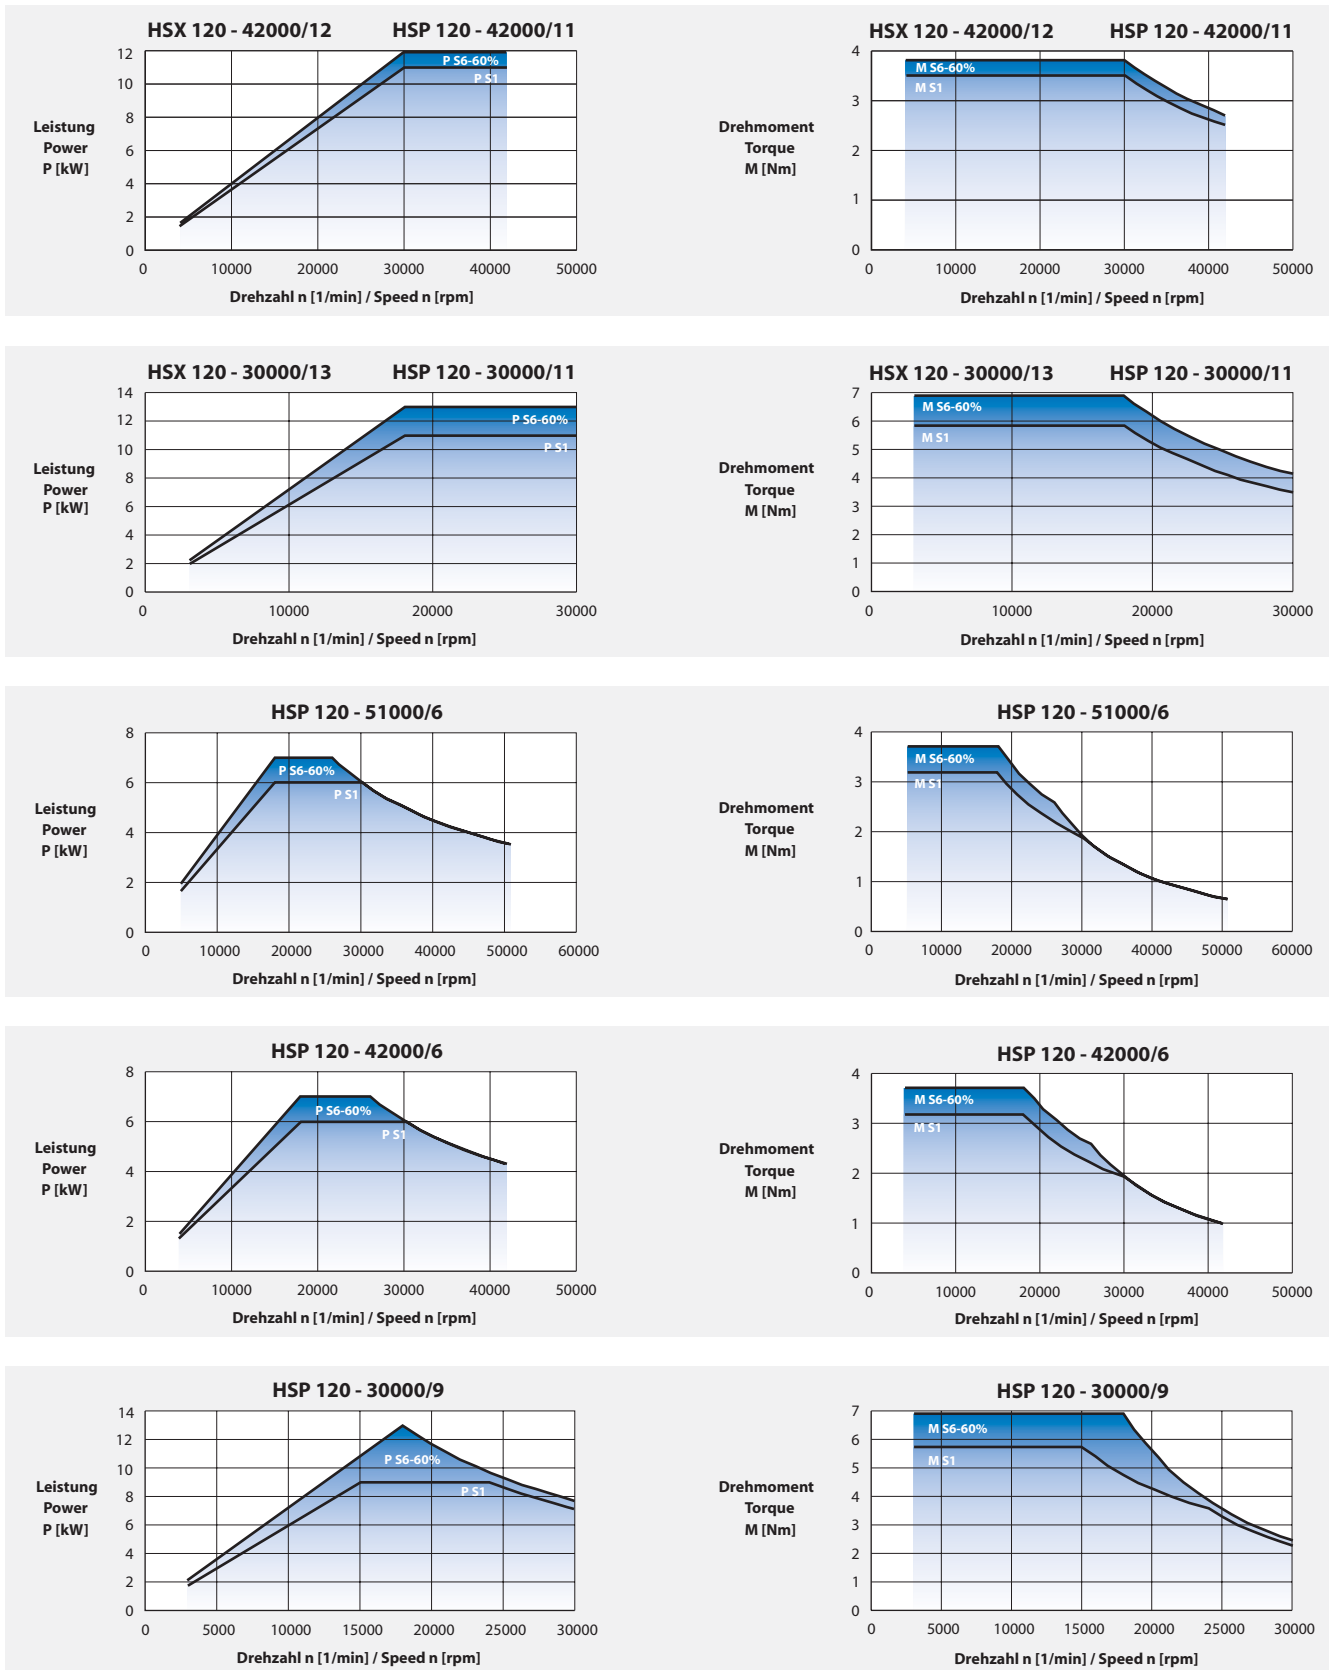











Power Characteristics

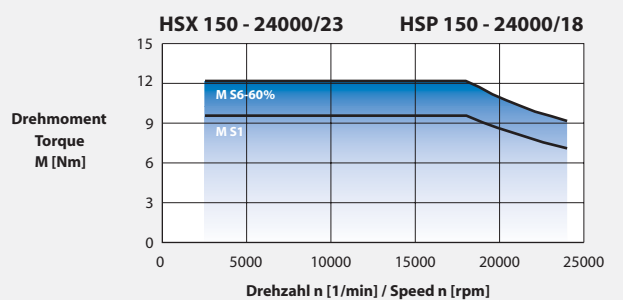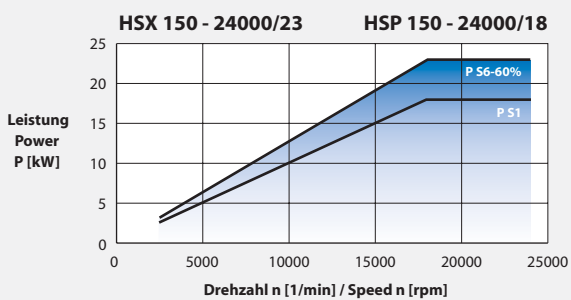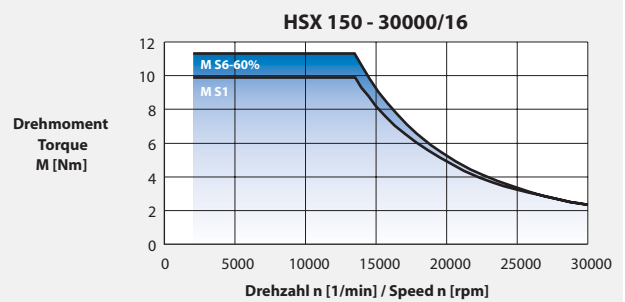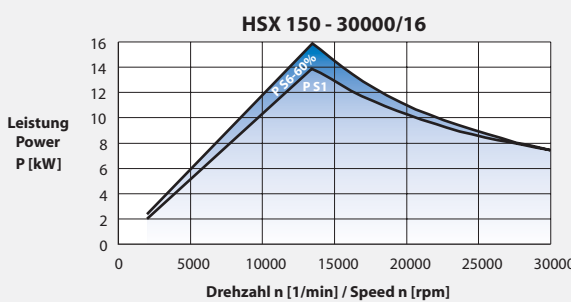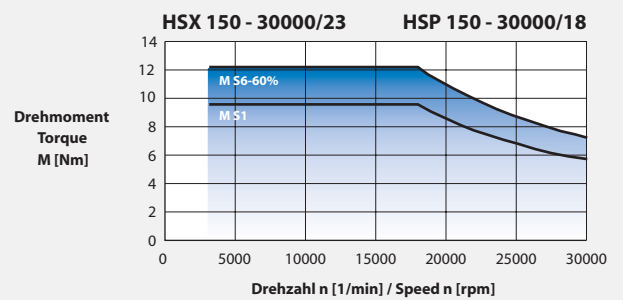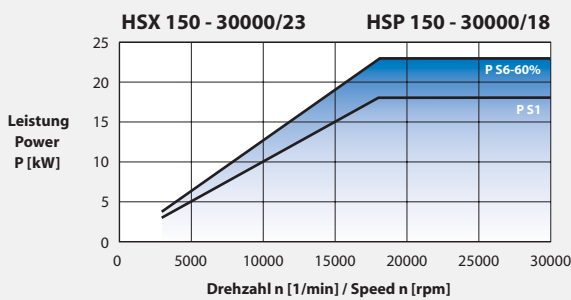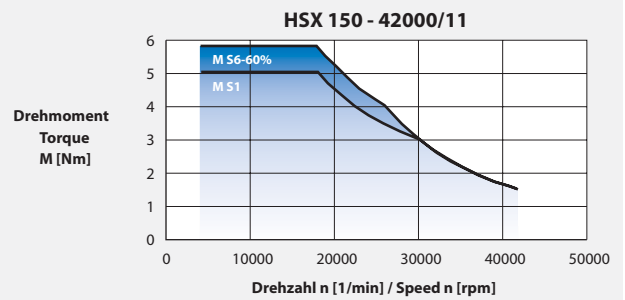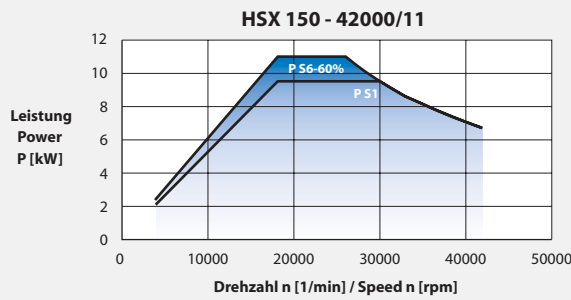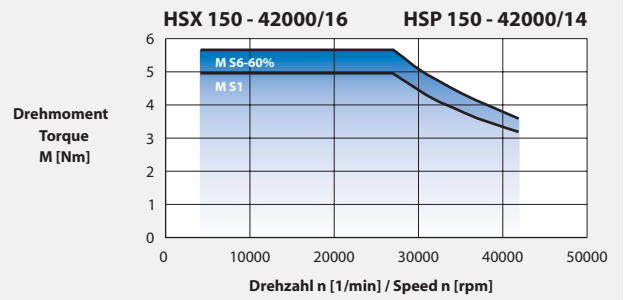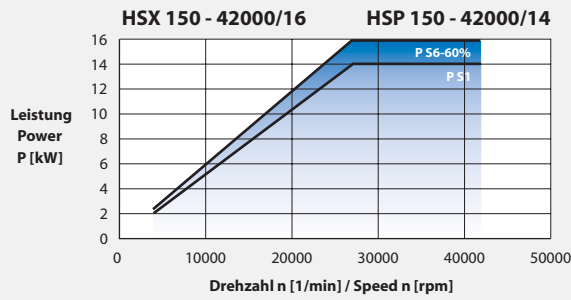


Power Characteristics

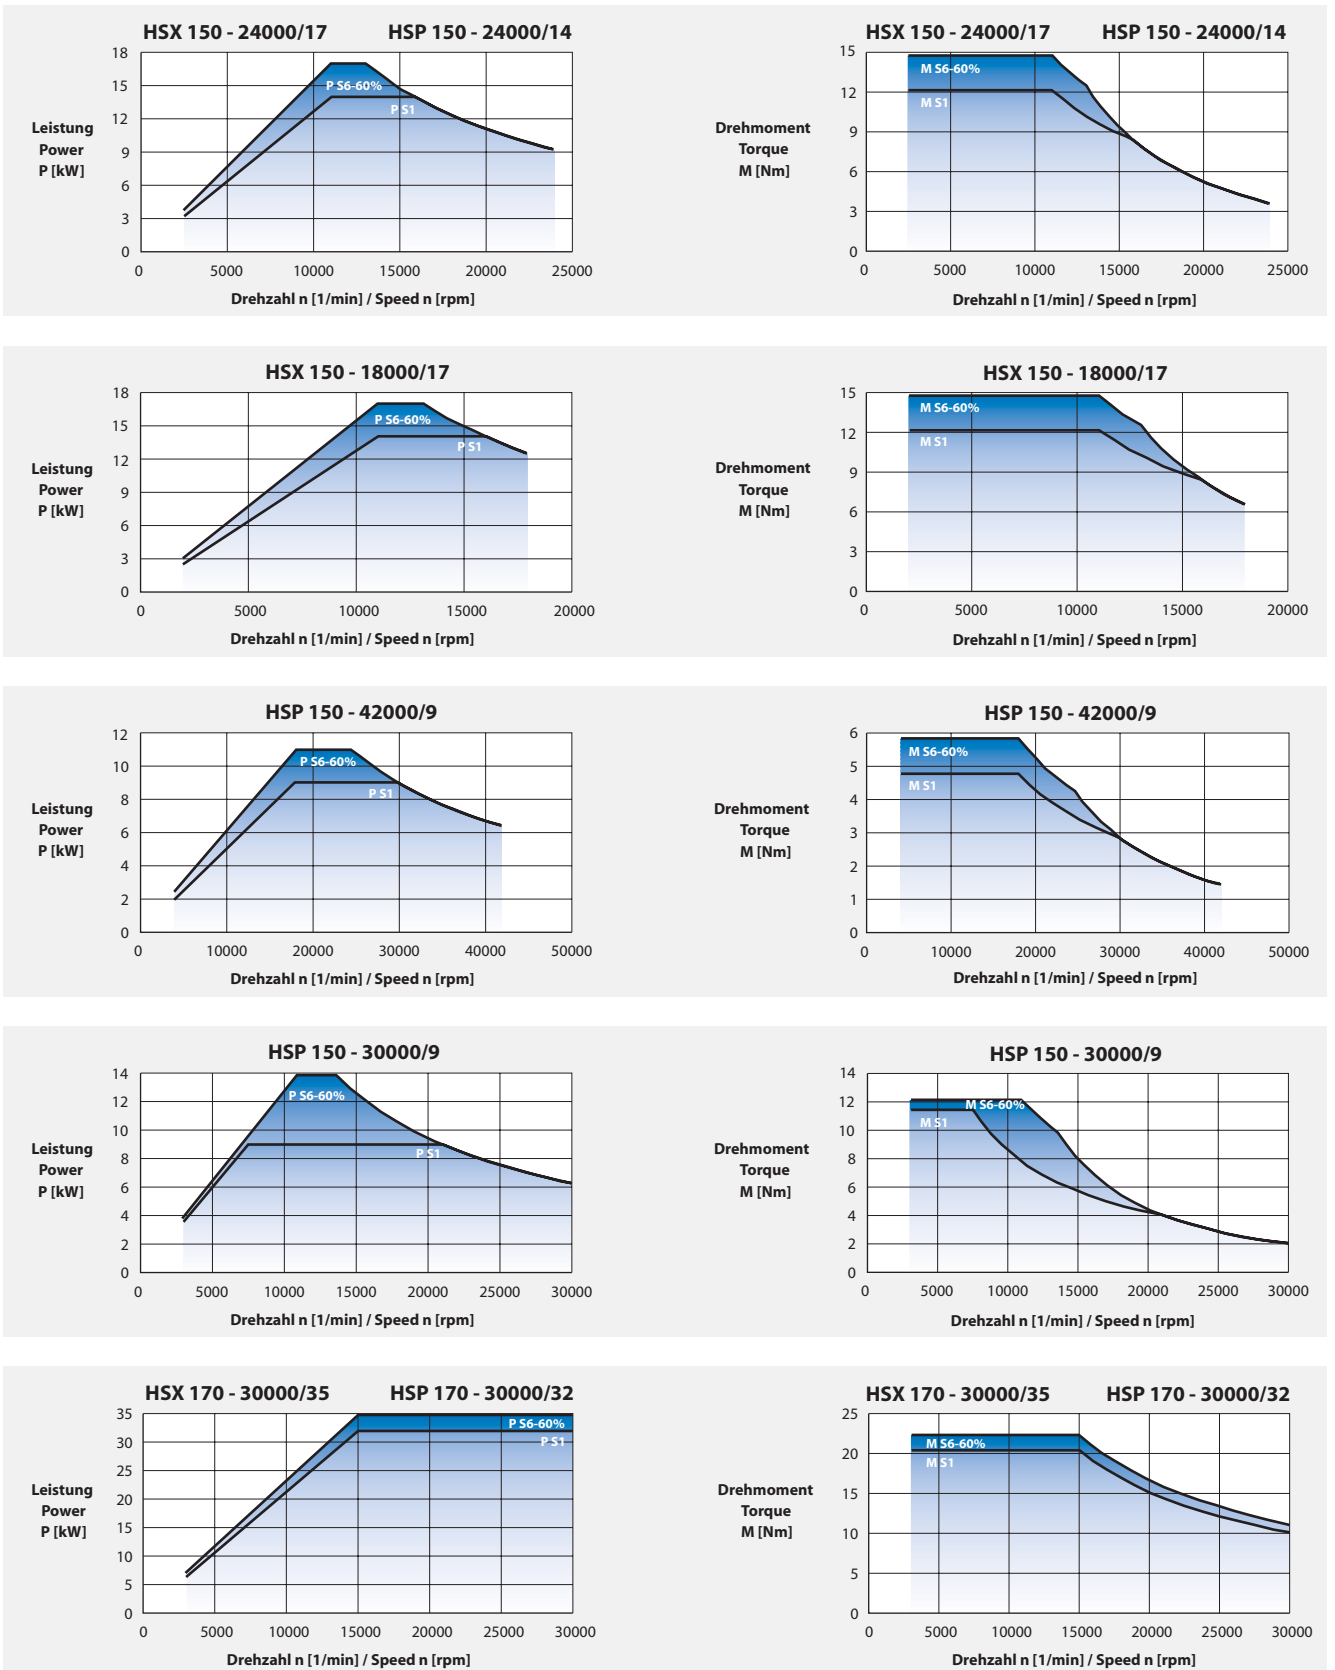


Power Characteristics

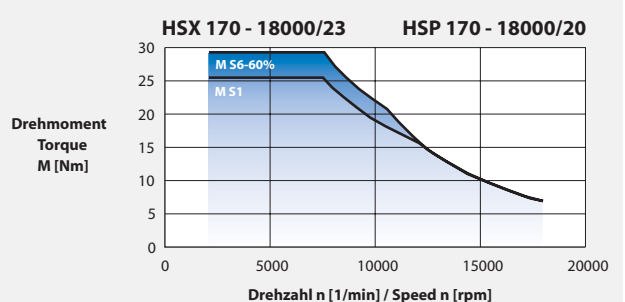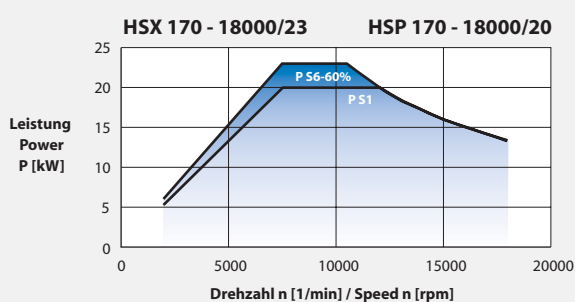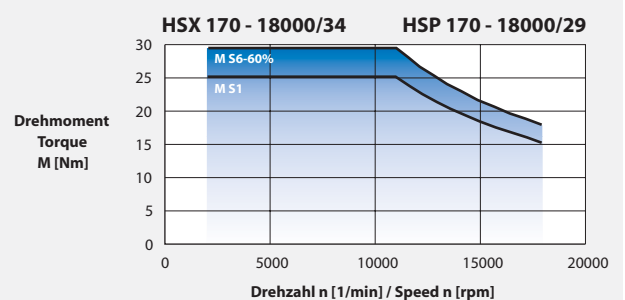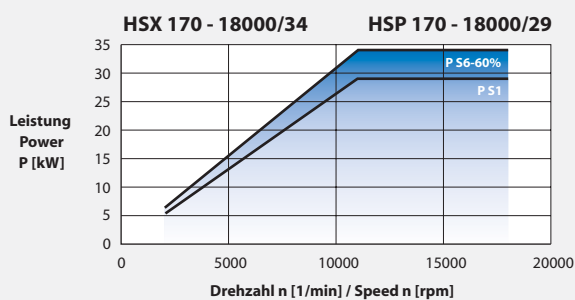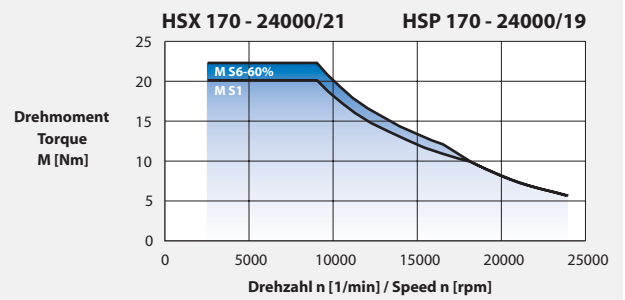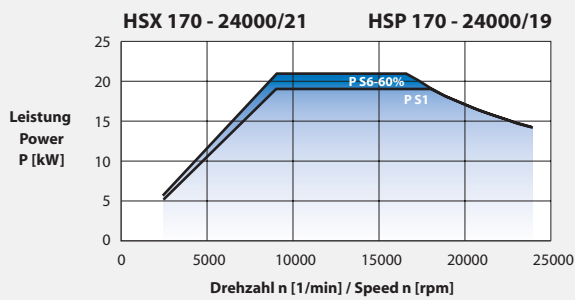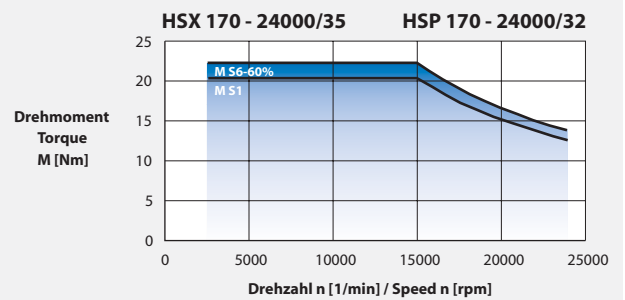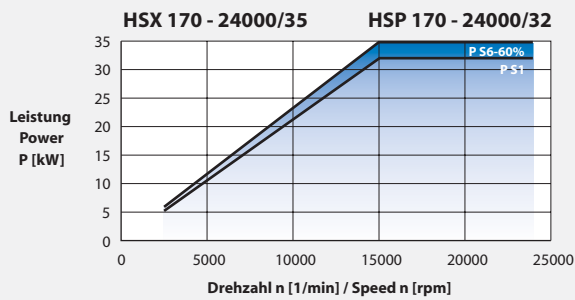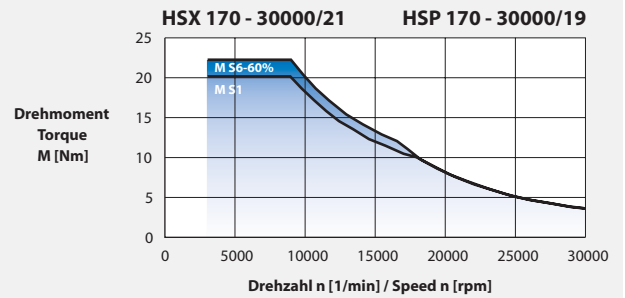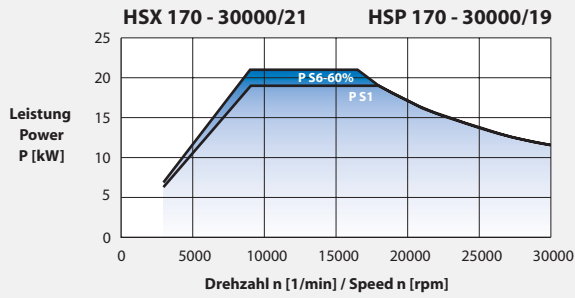


Power Characteristics

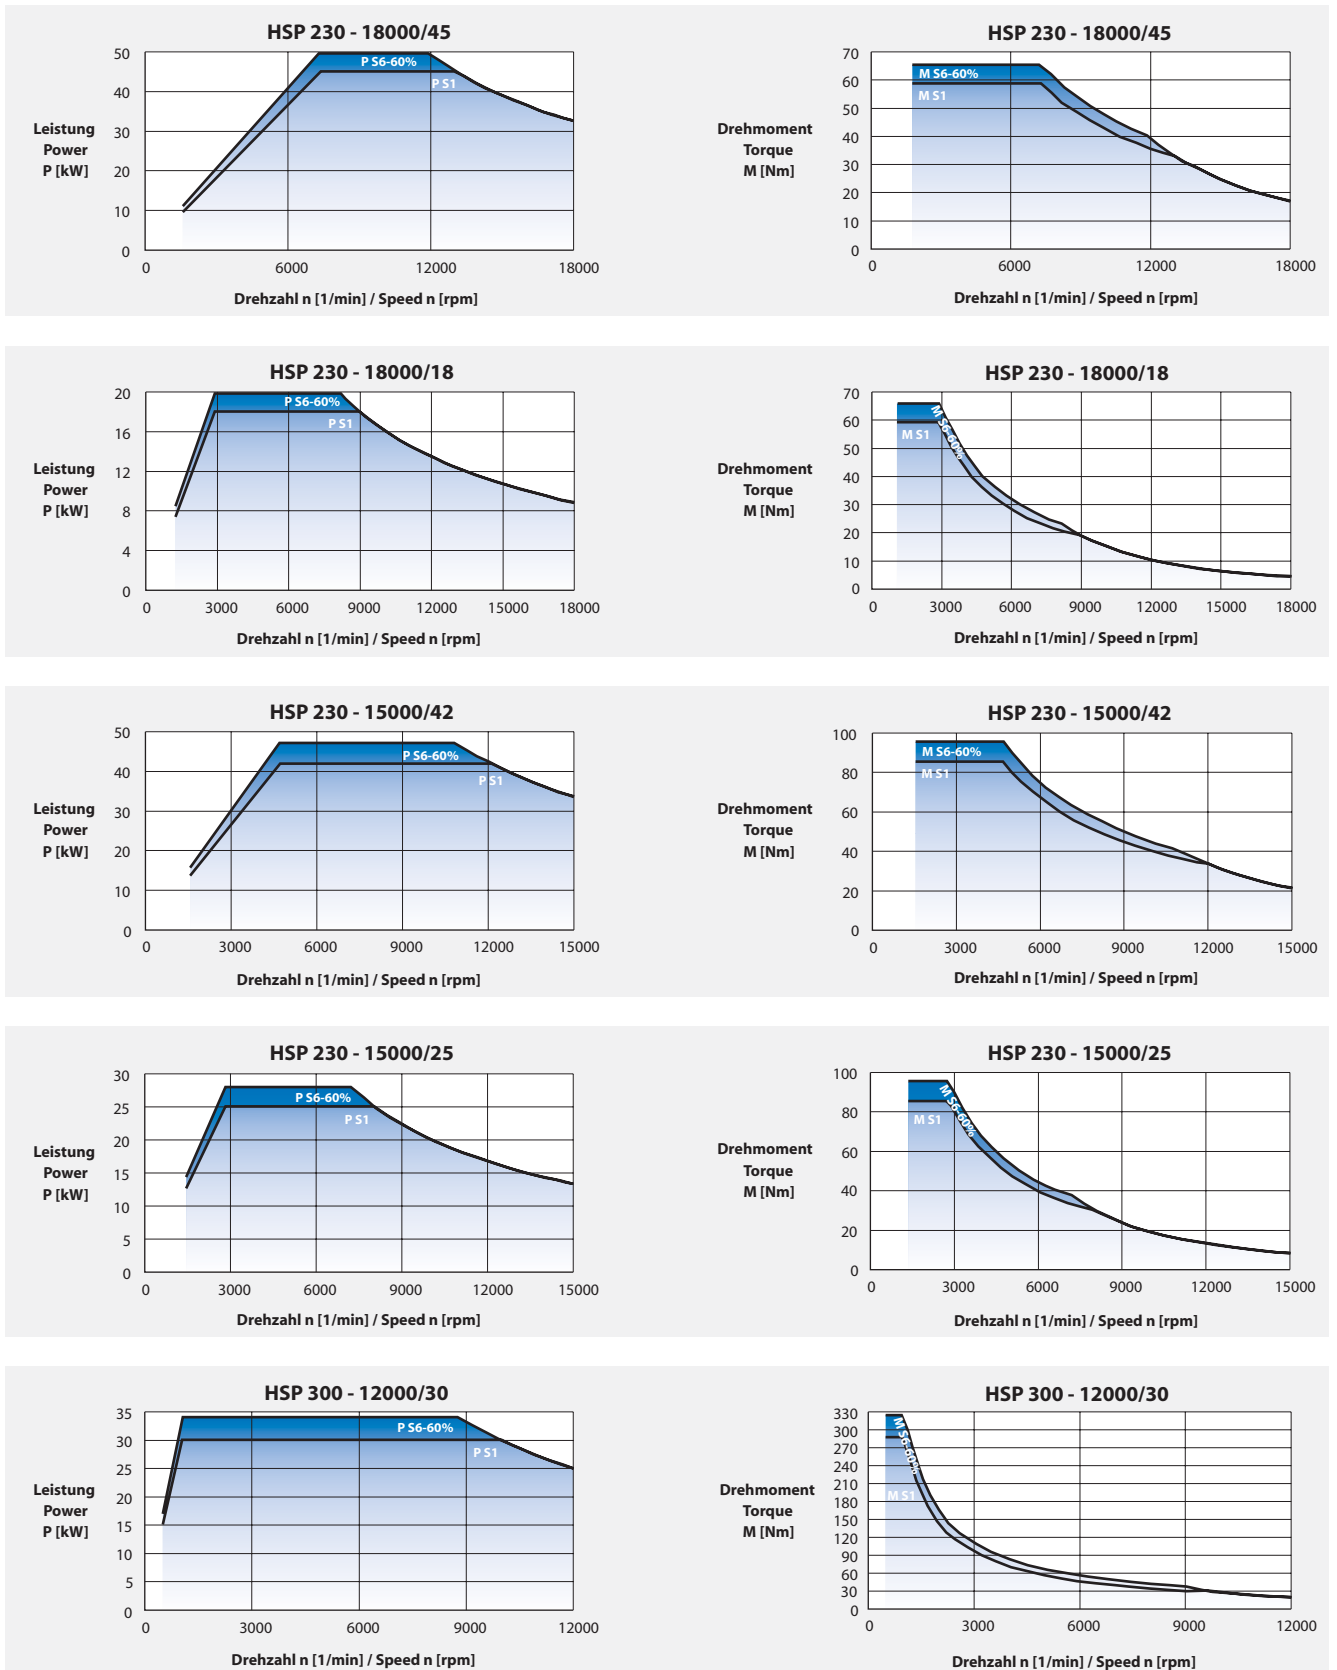


Power Characteristics

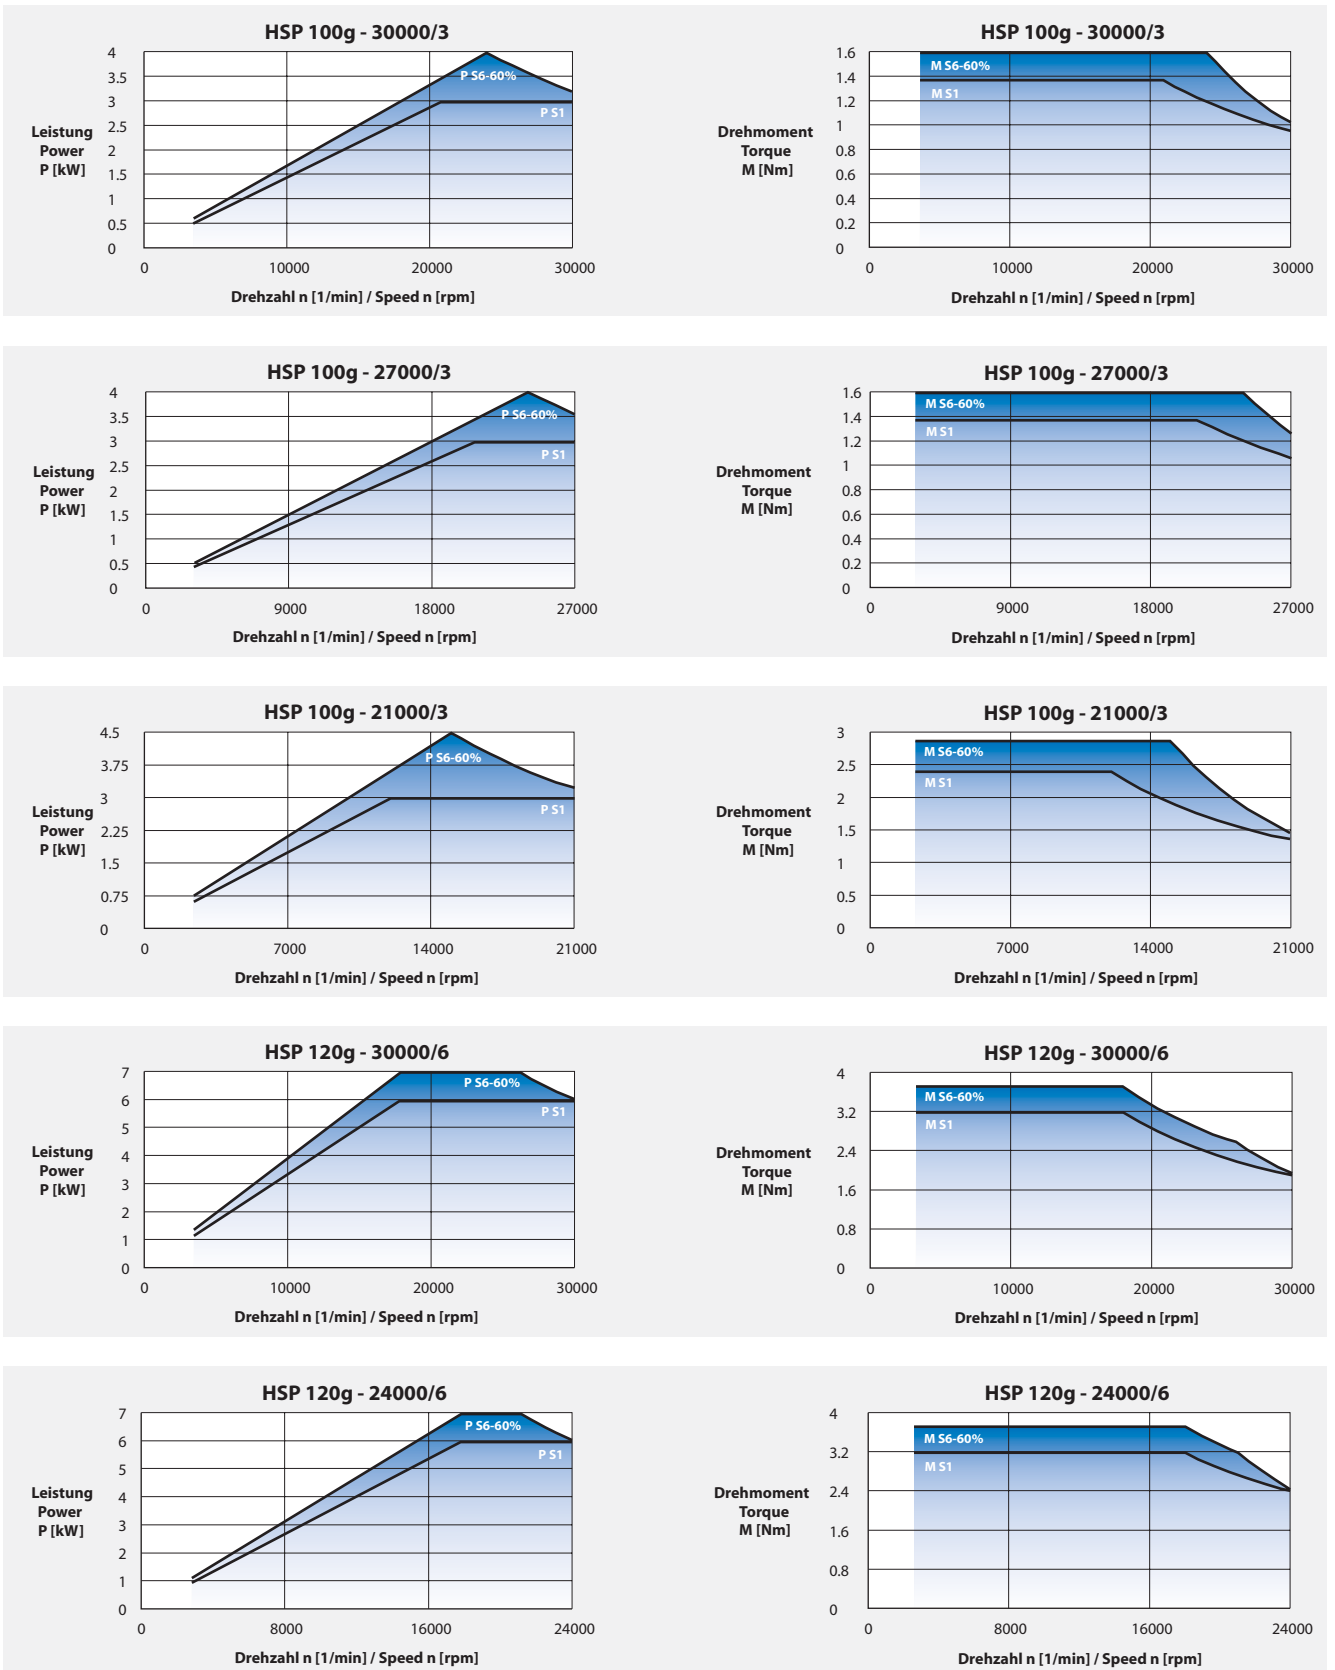


Power Characteristics

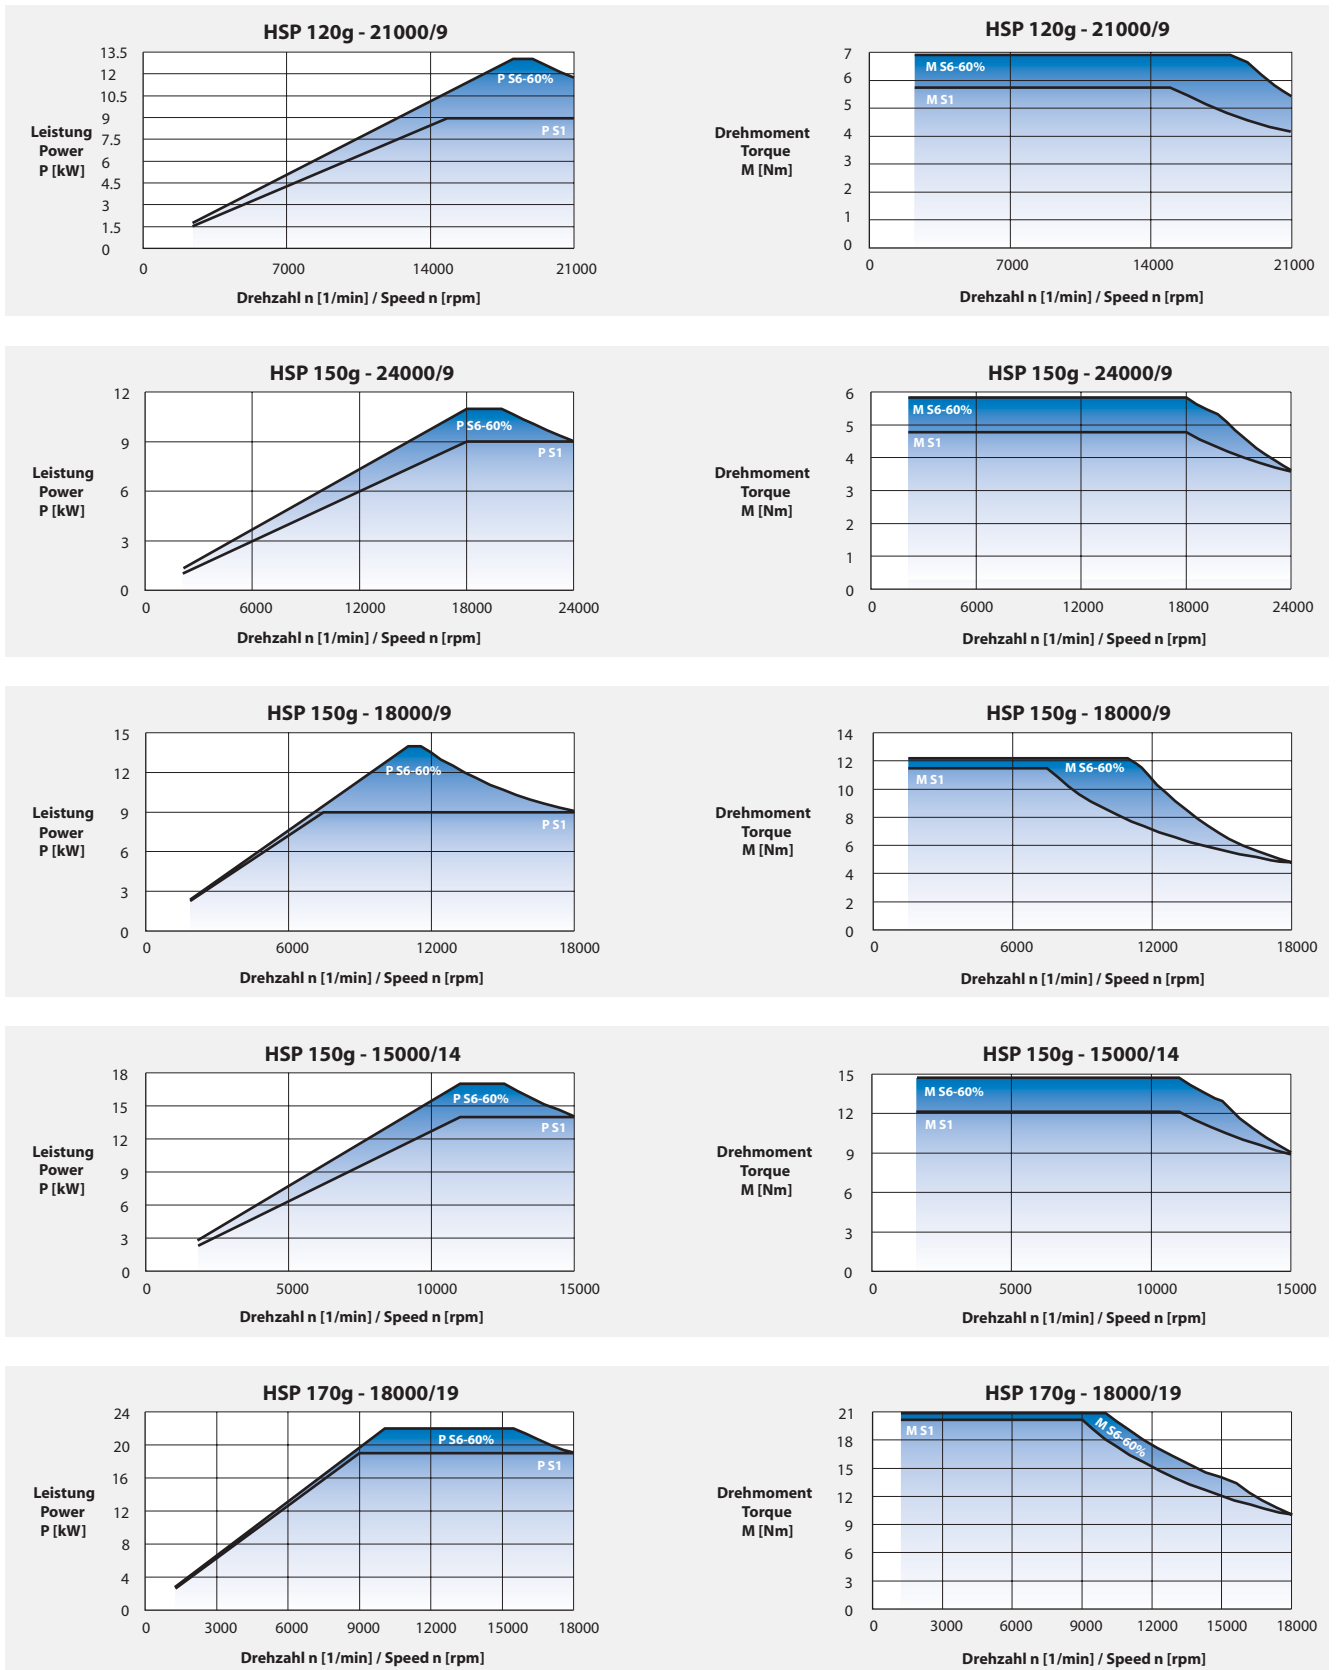


Power Characteristics

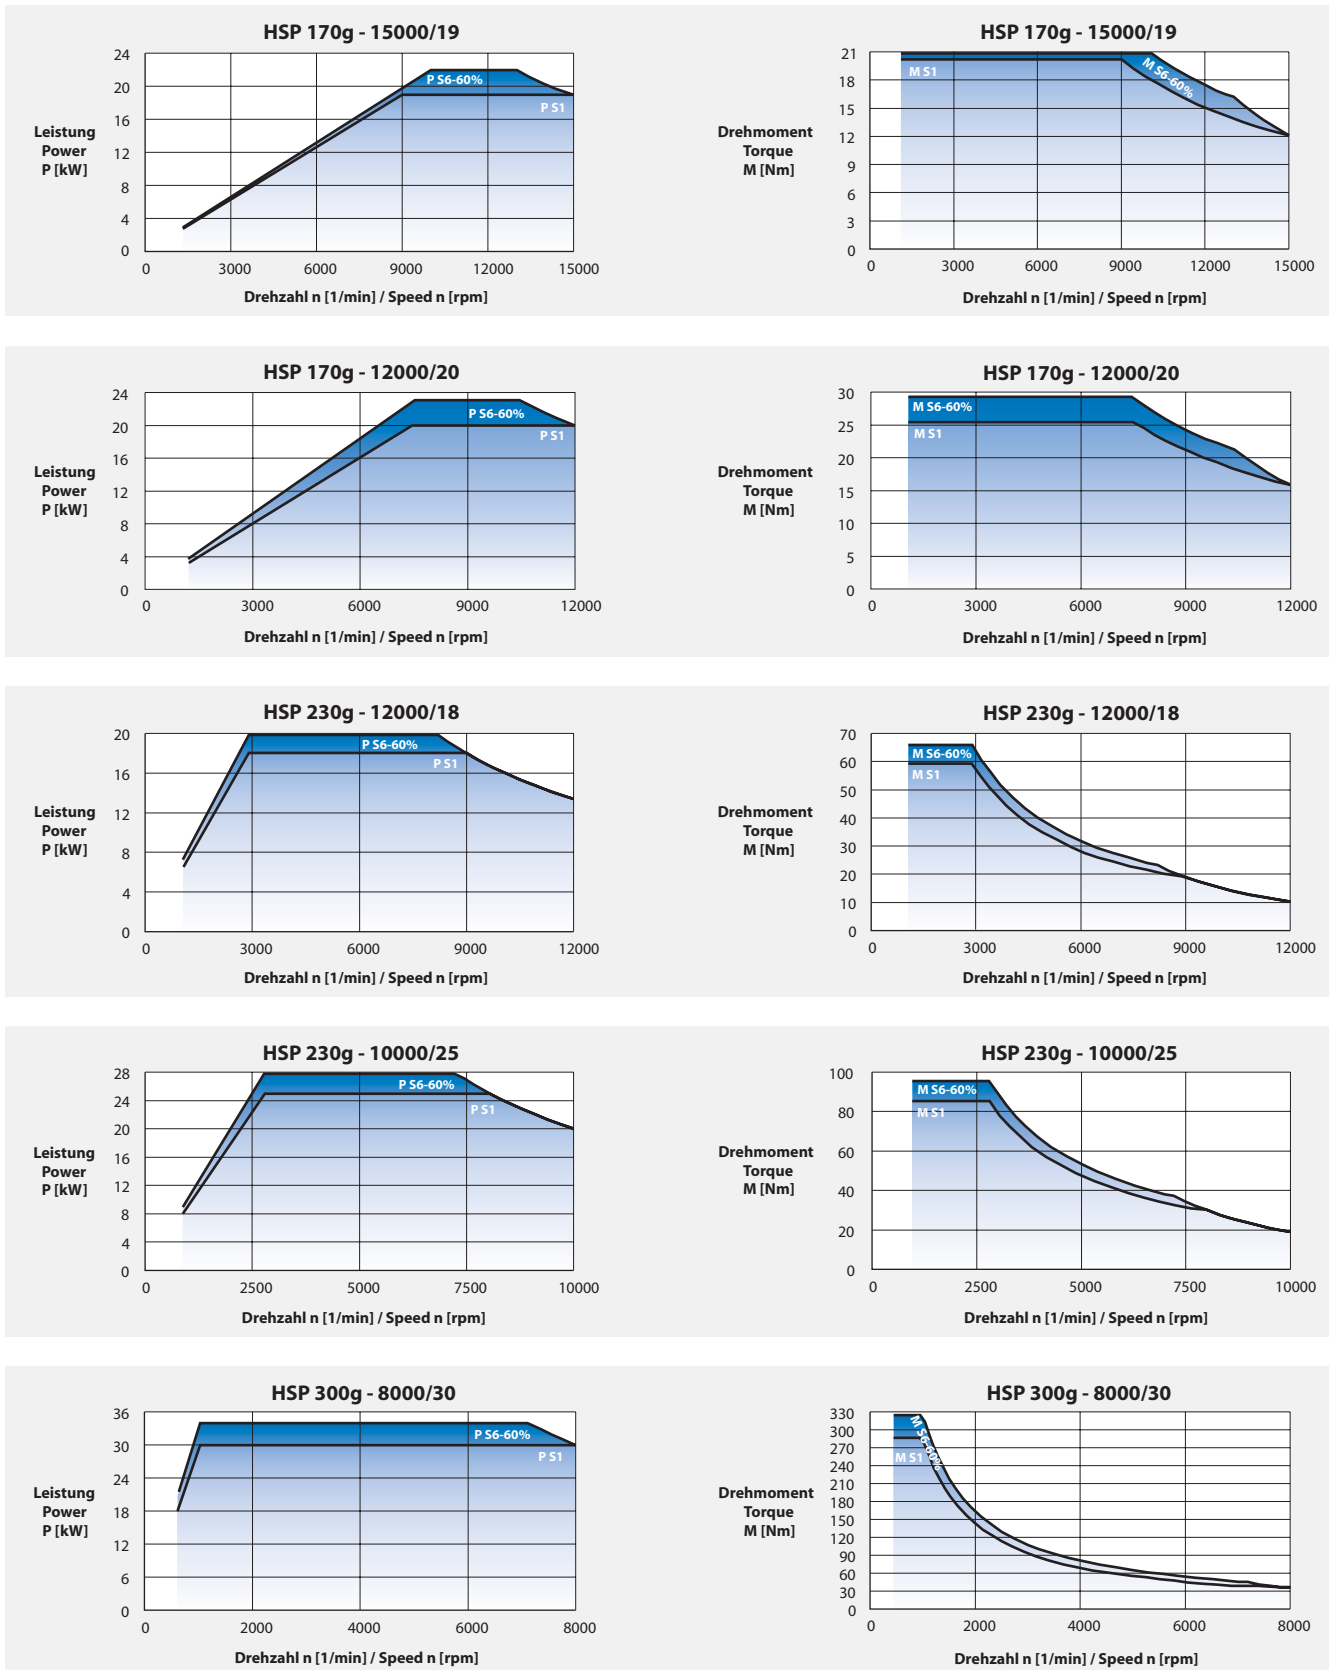


Power Characteristics

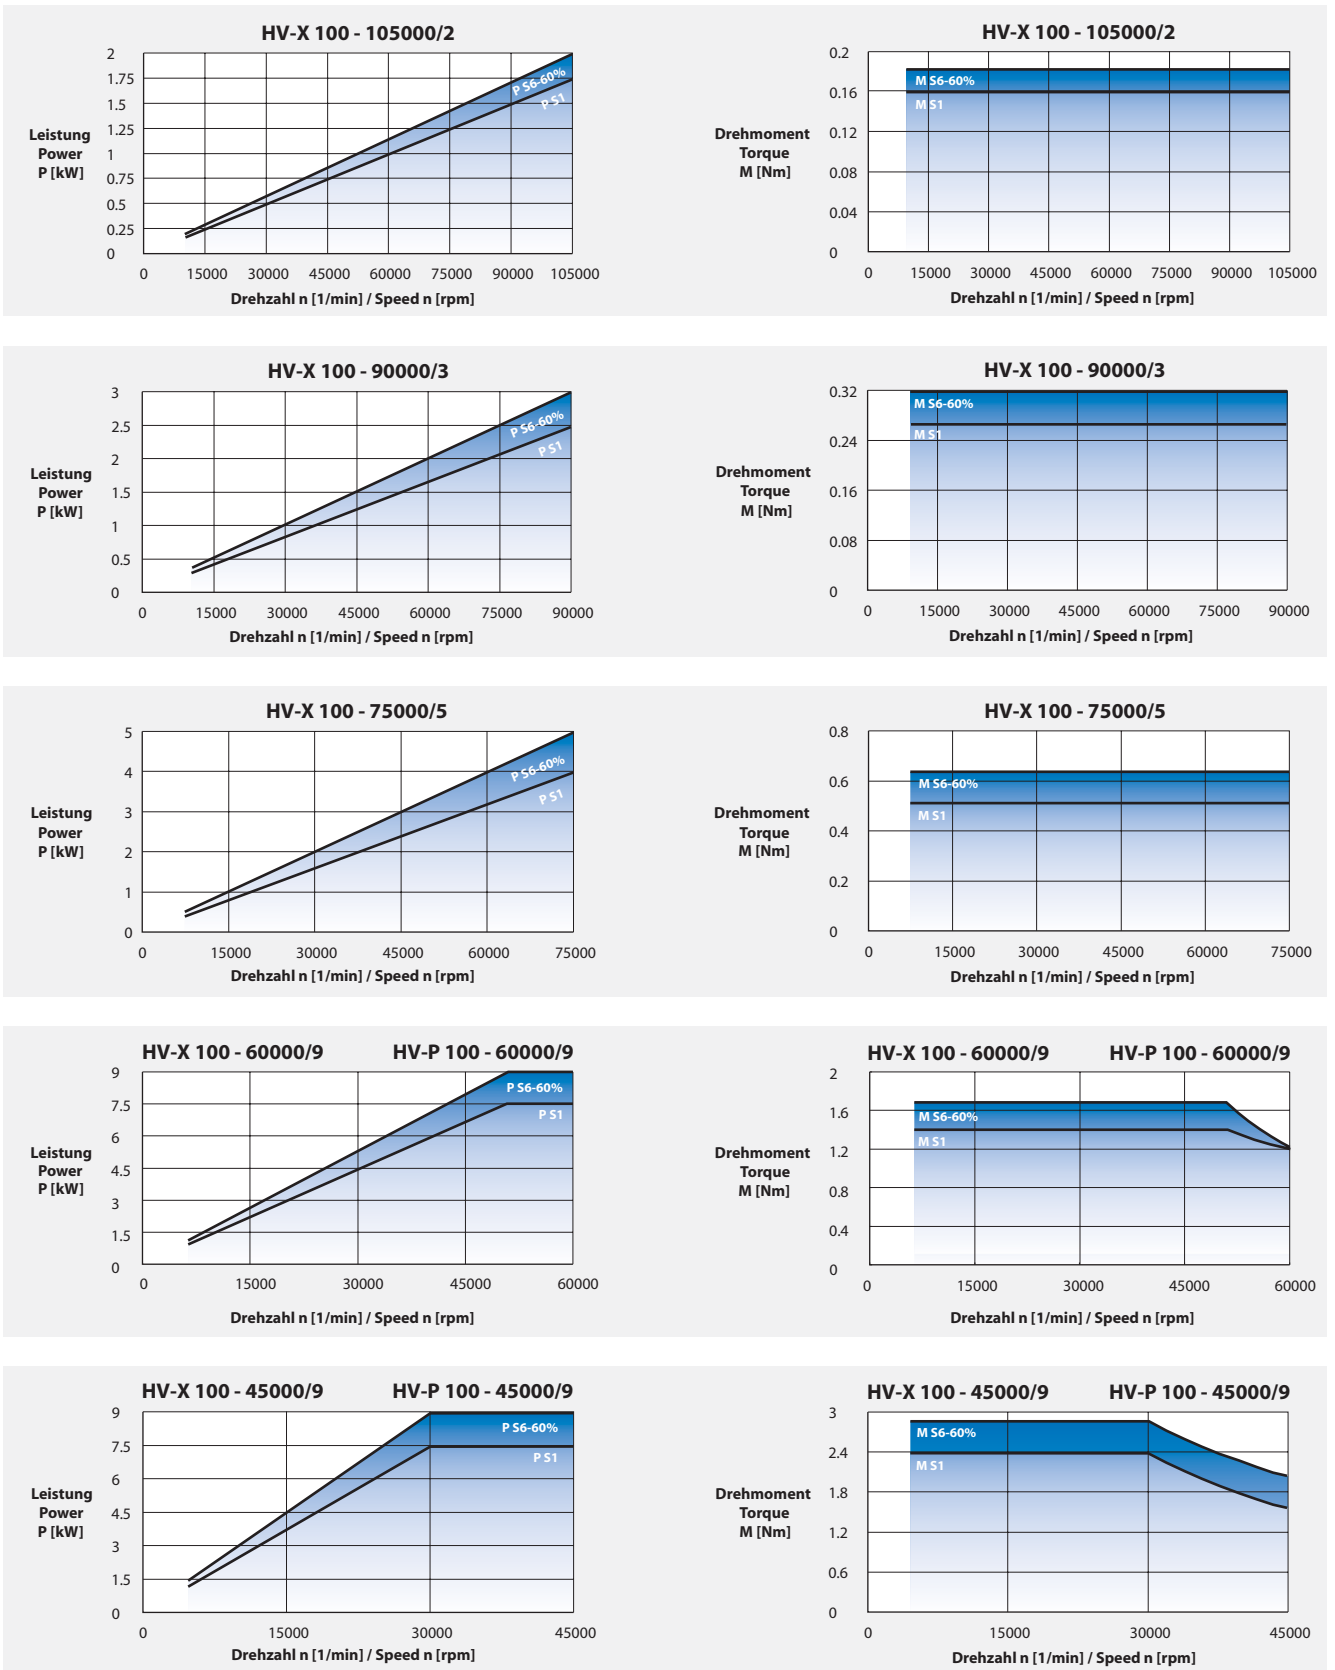


Power Characteristics

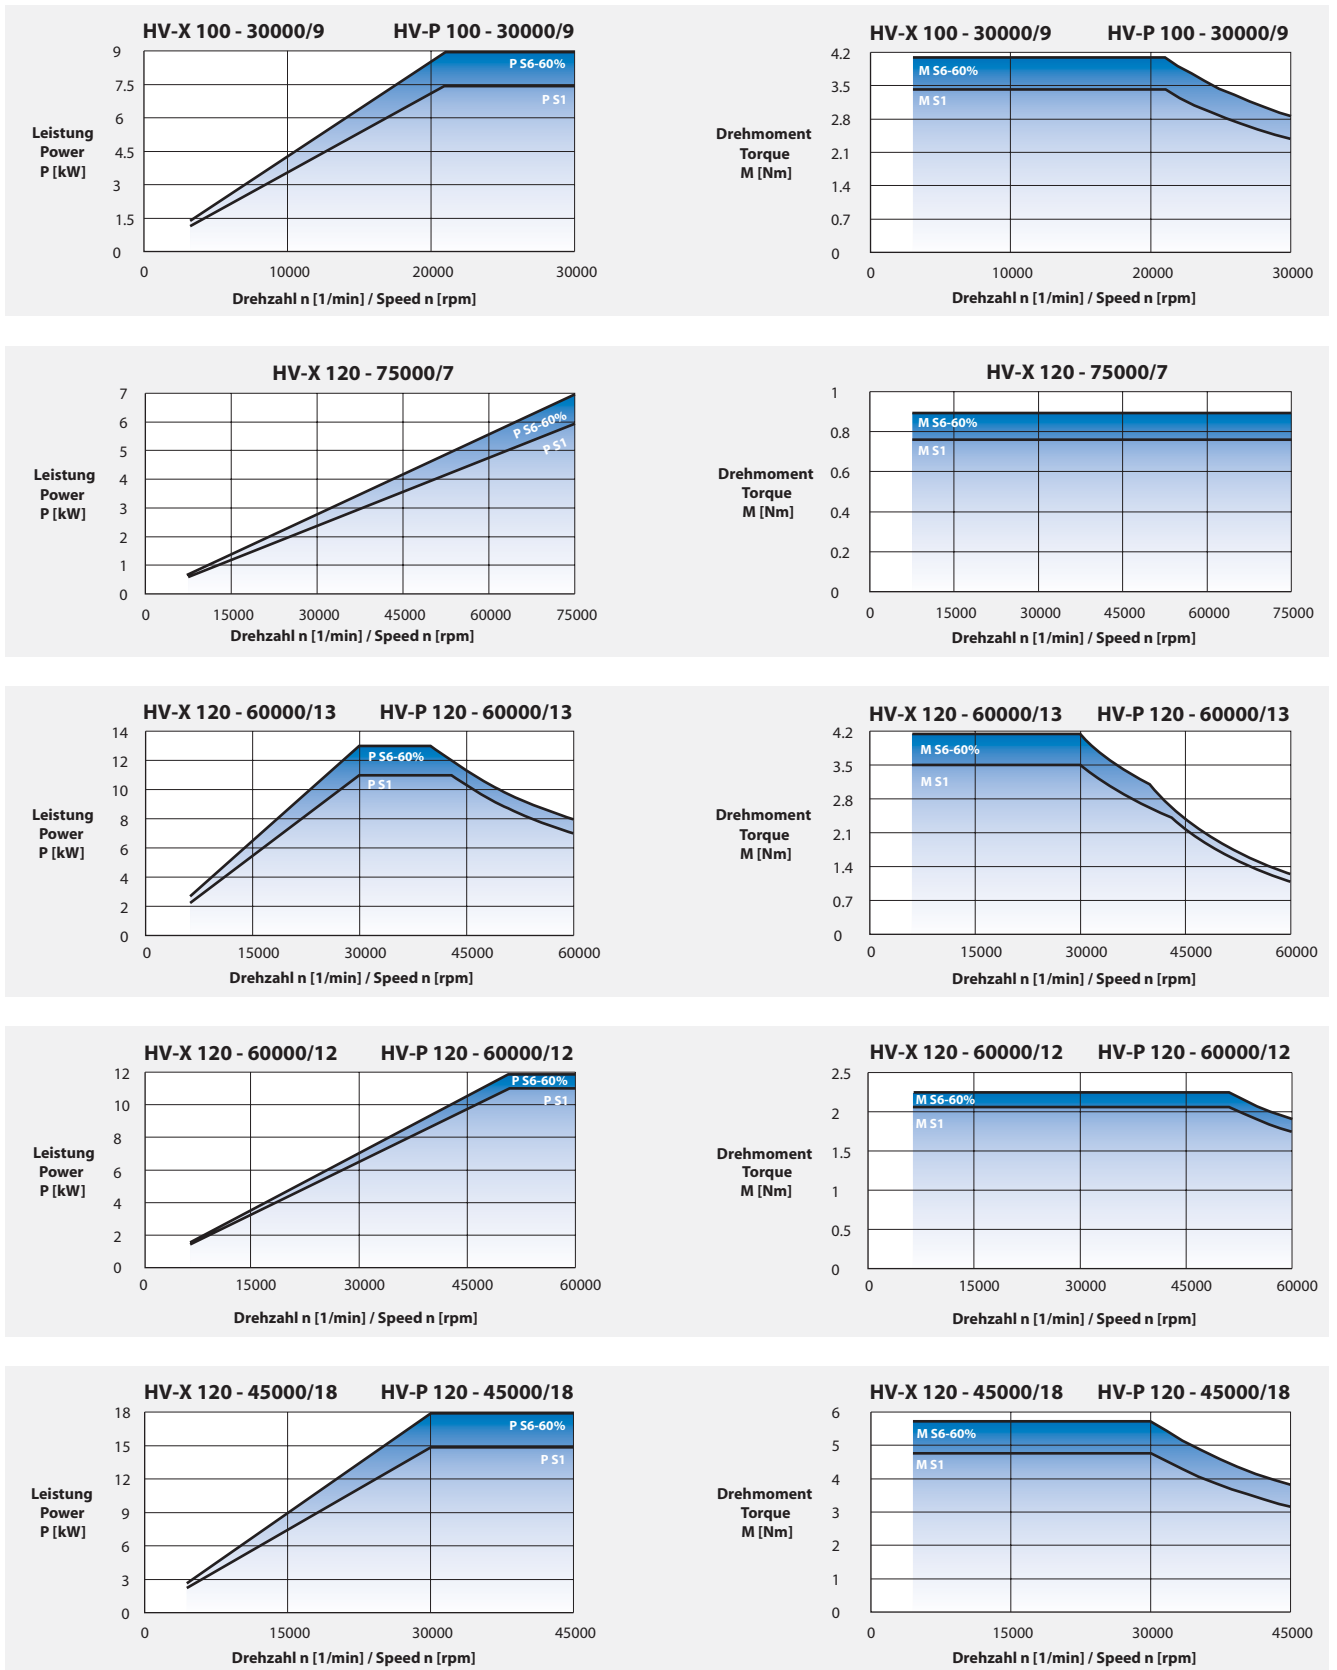

Power Characteristics

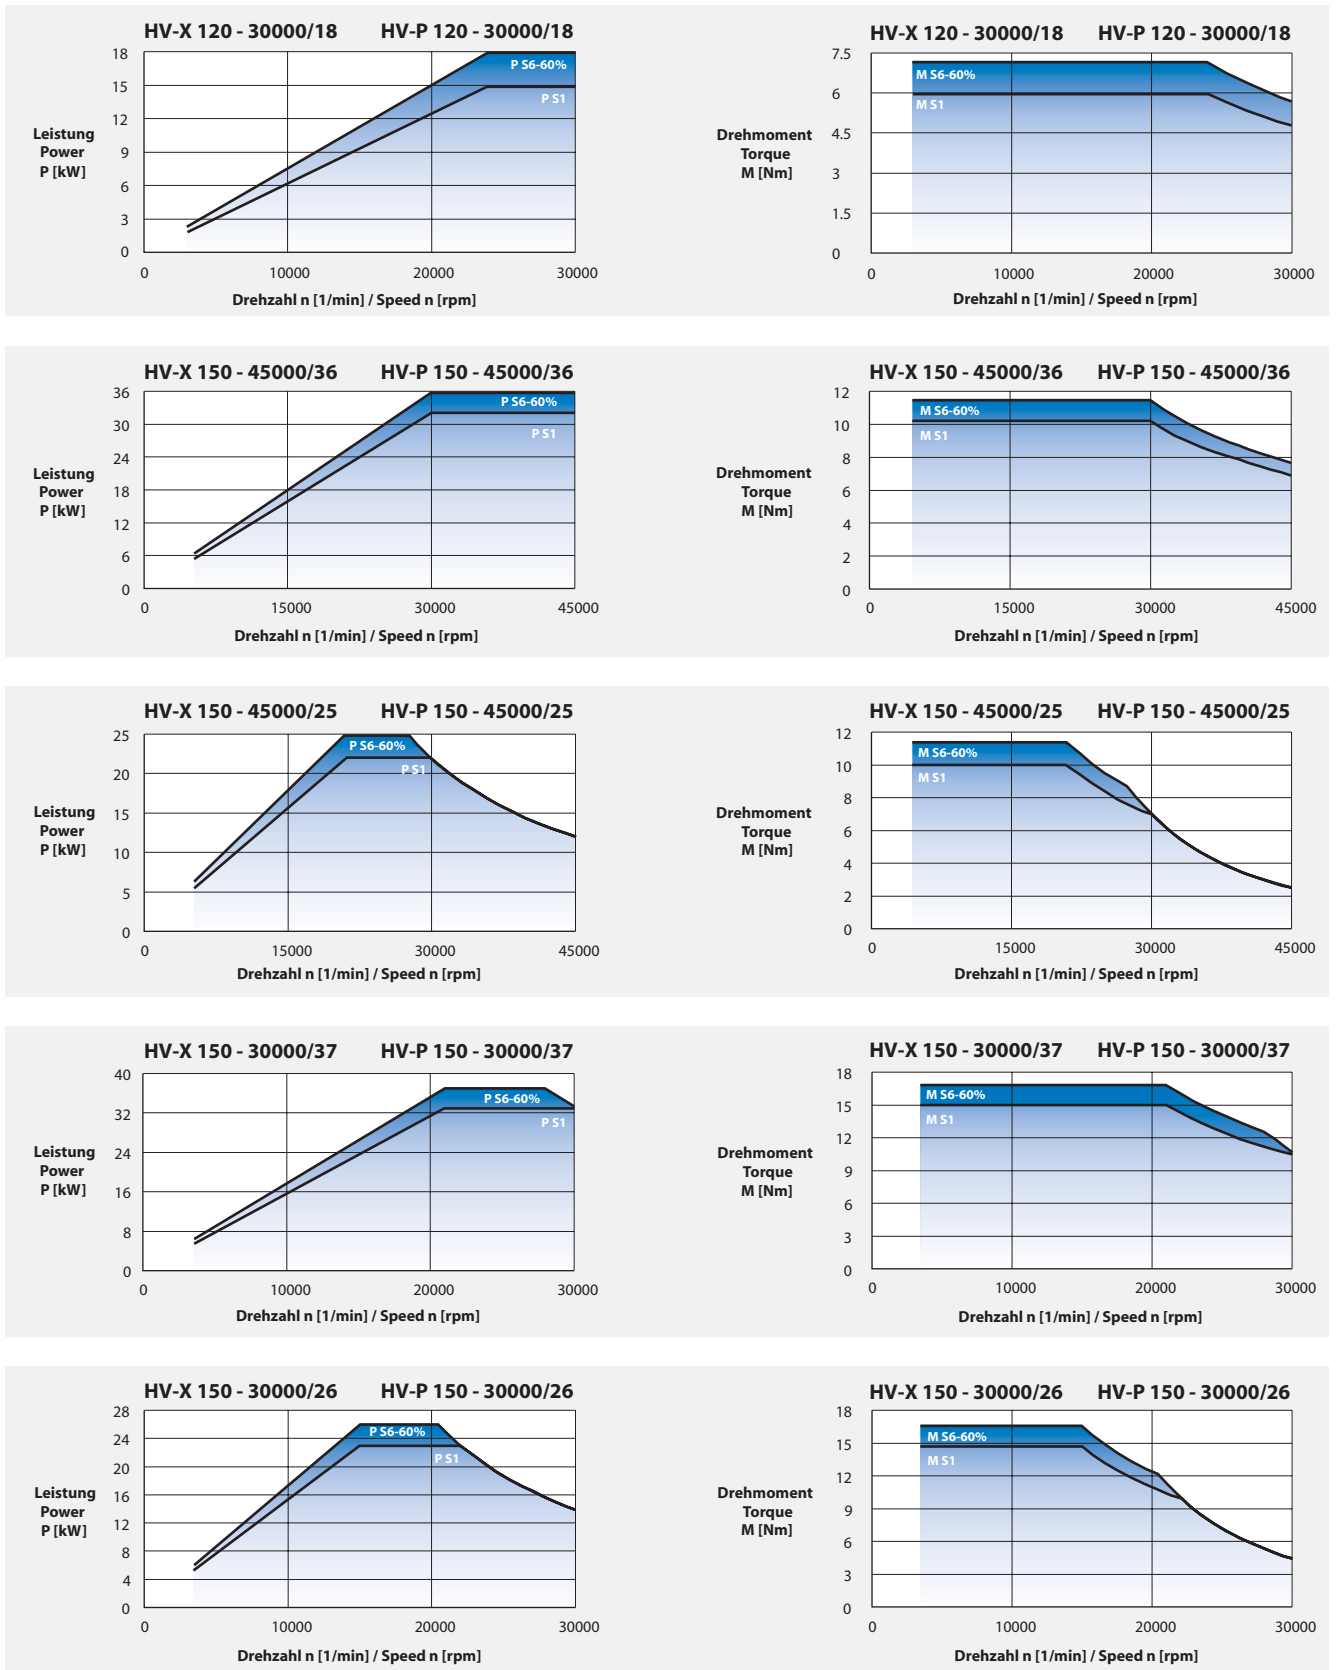


Power Characteristics

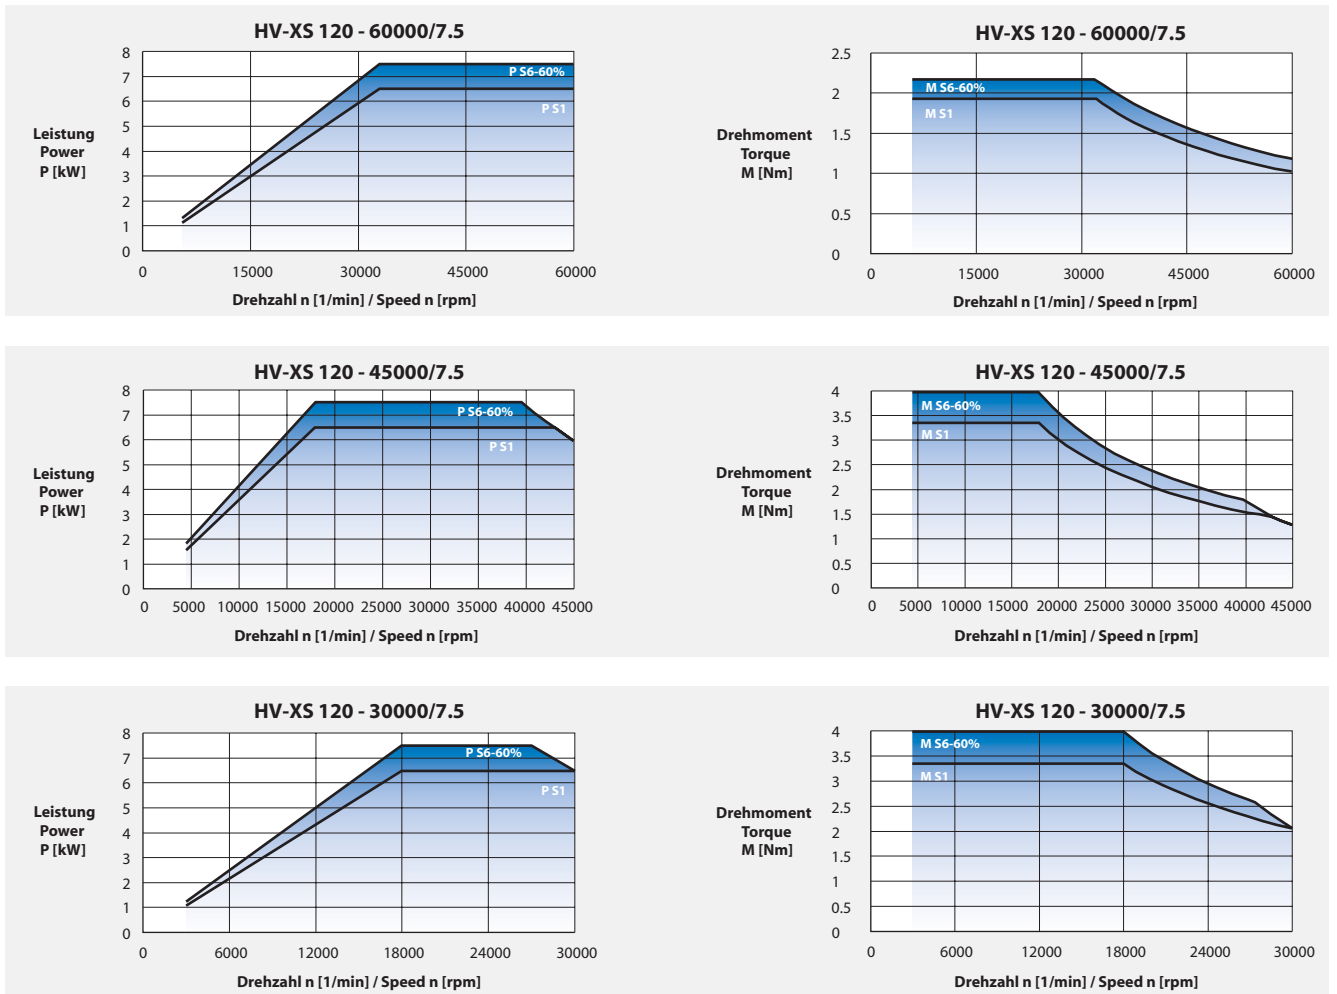


Drive Systems


Frequency converter with Volts/Hertz characteristics

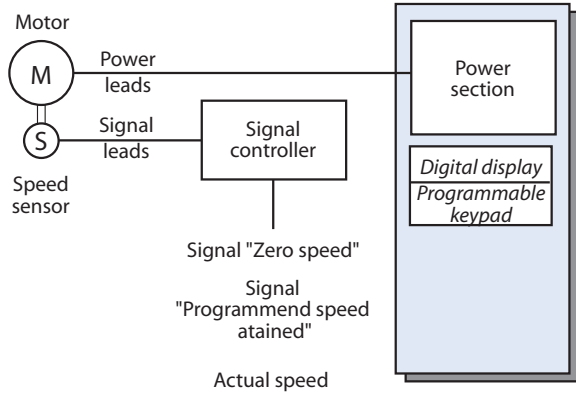


- ▶ Output frequency's to 3000 Hertz¹⁾
- ▶ Operating range 1 : 10
- ▶ Acceleration/deceleration times within 10 seconds
- ▶ Motor temperature monitoring
- ▶ Multiple spindle operation
- ▶ Option card for monitoring exact shaft speed and "Zero speed"
- ▶ Option card for "Gap elimination" and "Load monitoring"

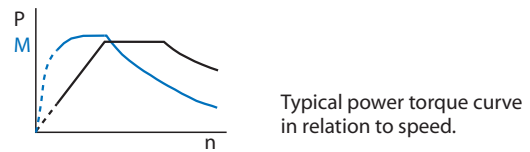


Vector control without encoder feedback

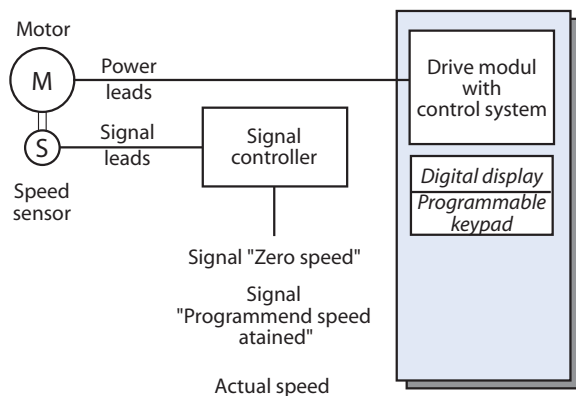


- ▶ Output frequency's to 1400 Hertz¹⁾
- ▶ Operating range 1 : 10 speed regulation approximately 0.5%
- ▶ Vector controlled speed drive
- ▶ Acceleration/deceleration within 1 second

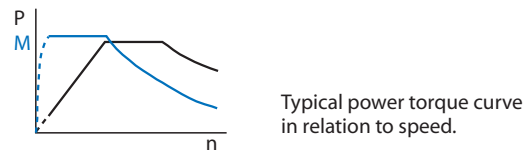

Vector control with encoder feedback

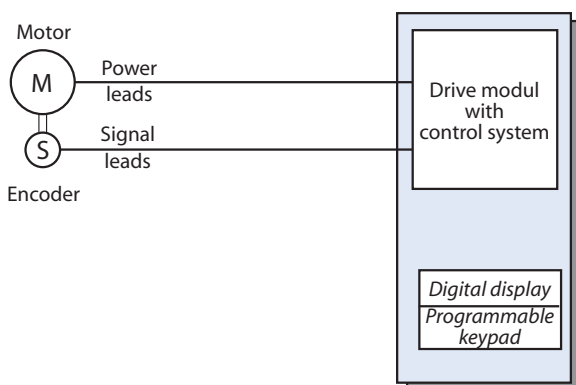

- ▶ Output frequency's to 1400 Hz¹⁾
- ▶ Shaft orientation
- ▶ Acceleration/deceleration within 1 second

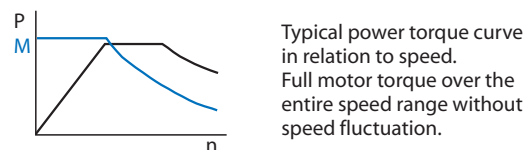

1) Depending on the inverter producer some different maximum output frequency's are possible.


Overspeed And Standstill Monitor DNDS 1H2-2

For automatized processing equipment an active signalling system is required, signalling when the processing spindle has stopped, e. g. for changing tools or protective functions. The signal is also used for monitoring of a programmed speed.


For this purpose a speed sensor in the spindle (Hall or NAMUR) is required.

The signal transmits the required information to the machine control.


Action chart

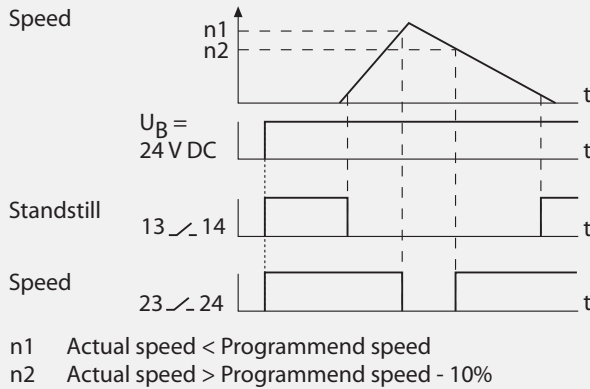

Plugging diagram

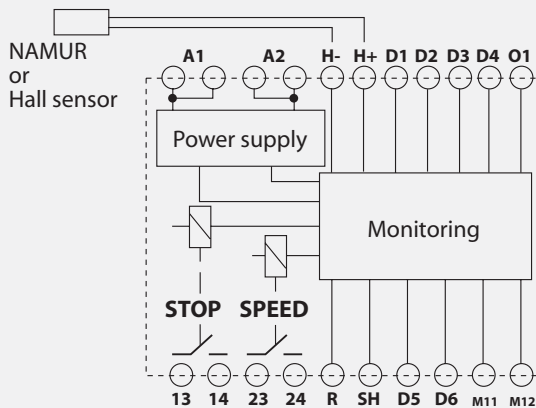

Dimensions

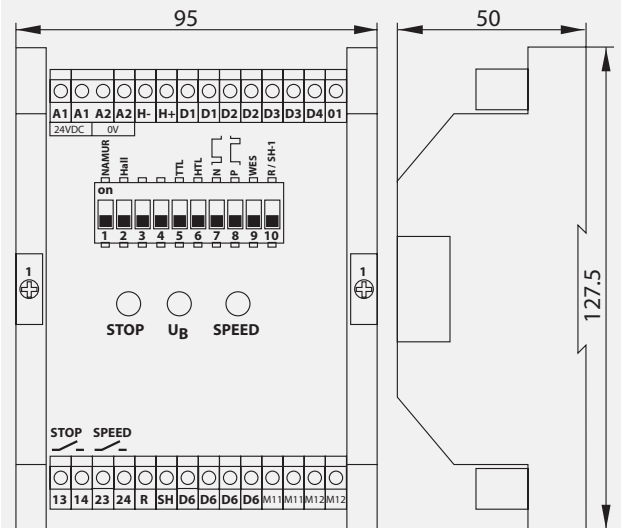

DIP Function

- 1 Motion detection by NAMUR sensor
- 2 Motion detection by Hall sensor
- 5 O1 TTL Output signal
- 6 O1 HTL Output signal
- 7 O1 Signal normal
- 8 O1 Signal invert
- 9 SPEED output restart disable (WES)
- 10 R/SH Speed selection


Technical data

Operating voltage:	24 V DC -15%, +10%
Residual ripple:	< 10%
Power consumption:	< 2.5 W
Output for additional purpose:	O1
Output standstill monitoring:	13 / 14
Output speed monitoring:	23 / 24
Contact material:	AgNi10
Switching capability:	230 V / 5 A / 1150 VA / Cosj = 1, 24 V / 5 A / 120 W
Mechanical life:	4 x 10 cycles
Repetitive accuracy:	±0.1 %
Operating factor:	100 %
Unit fuse protection:	(A1) 1.25 A slow acting internal

Contact fuse protection:	5 A slow acting
Airgap creepage:	to VDE 110 C 250 V
Operating temperature:	-10 up to +60°C (IEC 68-2-1/2)
Storage temperature:	-40 up to +85°C (IEC 68-2-1/2)
Vibration tolerance:	sine 10-55 Hz, 0.35 mm, 10 cycles, 1 oktave/min
Cable cross section:	1 x 2.5 mm ²
Protection:	<= IP 54 (for cabinet mounting)
Housing material:	PVC, PA VO (UL 94)
Dimensions (H x W x D):	50 x 175 x 127.5 mm (1.97" x 6.9" x 5.0")
Weight:	300 g

Power Cables

We can supply properly sized electrical power cables for connecting the spindle to the frequency inverter.

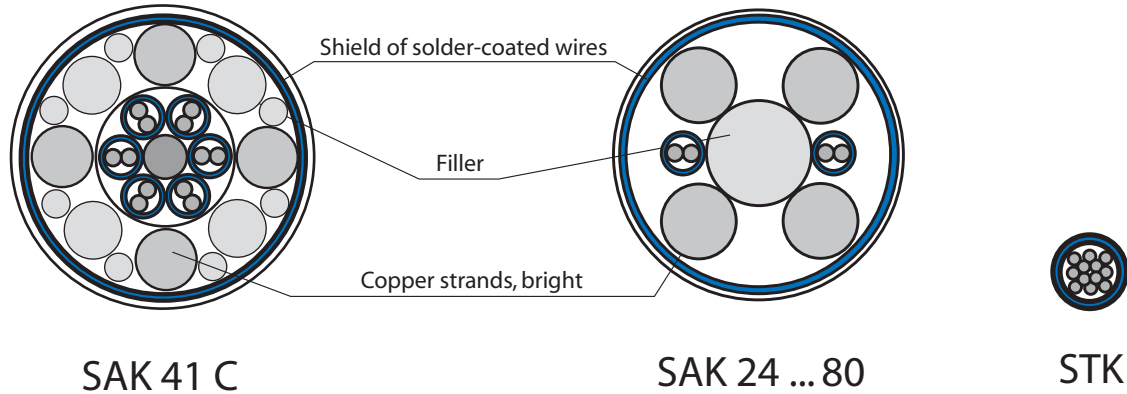

SAK 41 C

SAK 24 ... 80

STK

Type	For nominal current [A]	Power leads	Monitoring leads
SAK 18	18	Copper strands 4 x 1.5 mm ² , shielded	3 x (2 x 0.25 mm ²), shielded
SAK 24	24	Copper strands 4 x 2.5 mm ² , shielded	2 x (2 x 1.5 mm ²), shielded
SAK 33	33	Copper strands 4 x 4 mm ² , shielded	2 x (2 x 1.5 mm ²), shielded
SAK 41	41	Copper strands 4 x 6 mm ² , shielded	2 x (2 x 1.5 mm ²), shielded
SAK 41 C	41	Copper strands 4 x 6 mm ² , shielded	6 x (2 x 0.25 mm ²), shielded
SAK 55	55	Copper strands 4 x 10 mm ² , shielded	2 x (2 x 1.5 mm ²), shielded
SAK 80	80	Copper strands 4 x 25 mm ² , shielded	2 x (2 x 1.5 mm ²), shielded
STK			12 x 0.22 mm ² , shielded

Type	Sheating	Min. bent radius stat. [mm]	Min. bent radius dyn. [mm]
SAK 18	Isolation TPE/PUR, AD 12.9 mm Colour black	65	130
SAK 24	Isolation TPE/PUR, AD 18.7 mm Colour orange	100	190
SAK 33	Isolation TPE/PUR, AD 21.2 mm Colour orange	110	220
SAK 41	Isolation TPE/PUR, AD 25 mm Colour orange	140	280
SAK 41 C	Isolation PTPE/PUR, AD 25 mm Colour yellow	140	280
SAK 55	Isolation TPE/PUR, AD 25 mm Colour orange	140	280
SAK 80	Isolation TPE/PUR, AD 30 mm Colour orange	150	300
STK	Isolation special PVC, AD 6.2 mm abrasion proof, resists oil and gasoline	40	130

In order to obtain the legal electromagnetic compatibility the cable length has to be limited. The applicable recommendations have to be met during designing and setting into operation.


Safety Aspects For Tool Selection

Unbalanced state

Every spindle shaft and every tool incorporates a degree of unbalance, which causes sinuous vibration during rotation. To reduce the effect of unbalancing forces, the unbalancing mass of all rotating parts has to be limited. Shafts of GMN high frequency spindles are always balanced.


As a result of higher cutting speeds this process is also required for tools.

We recommend for precision cutting a permissible residual unbalance for tools according to the following diagram:

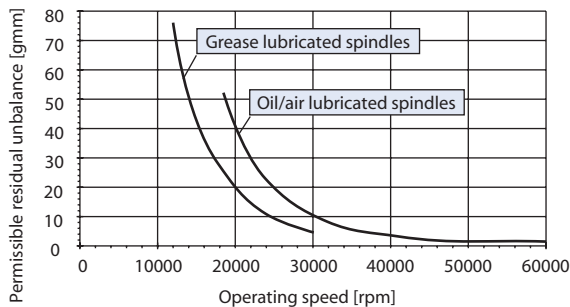

Critical speed

GMN high frequency spindles are designed so that the critical speeds remain above the maximum speed. When using inappropriate tooling the critical speed can be decreased to a level within the operating speed range. This can lead to poor part quality, decreased spindle performance, as well as jeopardizing the safety of the operator and machine.

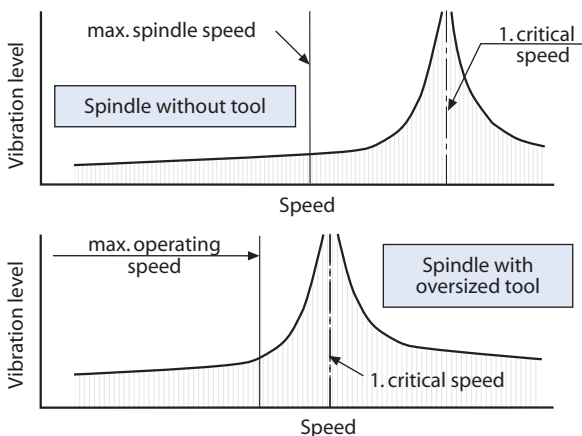


We recommend consulting our application engineering staff when tools which are extremely long and heavy are to be used.

Let GMN analyse your spindle and tooling requirements with our specifically designed computer software.

In addition to the critical frequencies the static and dynamic stiffness and load carrying capacity of each single bearing can be calculated.

Through proper analysis the correct spindle can be selected or tips for improvement of tools can be made.

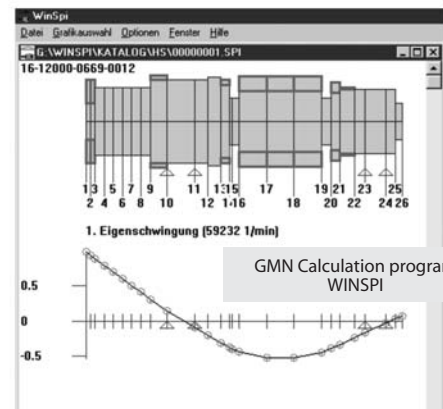

Centrifugal forces acting on tools

Centrifugal forces created by high rotating speed not only act as unbalancing forces but also induce stress into the tool. Especially inserted tooth milling cutter are very dangerous. When the attachment fails, indexable inserts can fly away like projectiles.

Vibration monitoring

Vibration monitoring equipment can lessen the risk of damage to both the spindle and machine, and also help prevent personnel injury by early detection of wear and looseness in both the spindle and tooling.

When selecting and installing monitoring equipment it should be noted that vibration from the machine and related components must be filtered out or ignored, so as to prevent unnecessary shut down of the machine.

Cutting Speed

Spindle type		Surface speeds at maximum spindle speed [m/s] ¹⁾													Spindle nose					
															Identification	Ho	SW			
HS	80c - 180000 / ...	56													D 04/08	4	7			
HS	80c - 150000 / ...	47													D 06/12	4	11			
HSX	80 - 120000 / ...	38																		
HS	80c - 120000 / ...	38													D 08/14	6	13			
HSX	100 - 105000 / ...	44	55	71																
HS	80c - 90000 / ...	38	47	61											D 09/16	6	14			
HV-X	100 - 105000 / ...	44	55	71																
HSX	100 - 90000 / ...	38	47	61	75											D 10/18	8	16		
HV-X	100 - 90000 / ...	38	47	61	75															
HSX	100 - 75000 / ...		39	51	63	79											D 14/23	8	20	
HV-X	100 - 75000 / ...		39	51	63	79														
HV-X	120 - 75000 / ...		39	51	63	79											D 16/28	10	24	
HSX	100 - 60000 / ...			41	50	63	79													
HSX	120 - 60000 / ...			41	50	63	79											D 22/38	12	32
HV-X	100 - 60000 / ...			41	50	63	79													
HV-X(S)	120 - 60000 / ...			41	50	63	79											D 28/43	12	38
HSX	120 - 51000 / ...				43	53	67	85												
HV-X	100 - 45000 / ...				37	47	59	75								D 32/53	12	48		
HSX	120 - 42000 / ...					44	55	70	88											
HSX	150 - 42000 / ...					44	55	70	88						D 36/63	15	55			
HV-X(S)	120 - 45000 / ...					47	59	75	94											
HV-X	150 - 45000 / ...					47	59	75	94						D 36/68	15	60			
HV-X	100 - 30000 / ...						39	50	63	79										
HSX	120 - 30000 / ...						39	50	63	79										
HV-X(S)	120 - 30000 / ...						39	50	63	79					D 32/53	12	48			
HSX	150 - 30000 / ...						39	50	63	79	99									
HSX	170 - 30000 / ...						39	50	63	79	99			D 36/63	15	55				
HV-X	150 - 30000 / ...							50	63	79	99	125								
HSX	150 - 24000 / ...							40	50	63	79	101		D 36/68	15	60				
HSX	170 - 24000 / ...							40	50	63	79	101								
HSX	150 - 18000 / ...							30	38	47	59	75		D 36/68	15	60				
HSX	170 - 18000 / ...								38	47	59	75	94							

Wheel dimensions [mm]	E	6	8	10	13	16	20	25	32	40	50	63	80	100
	F	8	10	10	13	16	20	25	25	32	40	40	40	40
	G	2	3	3	4	6	8	10	13	16	20	25	32	36
Quill - Ø [mm]	K	4	5	6	8	10	13	16	20	25	32	40	50	56
Wheel mount		KI	KI	KI	PS	PS	PS	PS	PS	MU	MU	MU	MU	MU
	see type	1	1	1	2+3	2+3	2+3	2+3	2+3	4	4	4	4	4
Close-fit hole attachment [mm]	d1				4	6	8	10	13					
	M1				M3	M5	M6	M8	M12					
	L5				5	7	9	12	13					
	L6				8	11	12	14	17					

Quill stiffness [N/µm]	Grinding quill length H [mm]	Grinding quill diameter K [mm]												
		4	5	6	8	10	13	16	20	25	32	40	50	56
16	16	1.8	4.7	9.8										
20	20	1	2.4	5	15.8	38.7								
25	25		1.2	2.6	8.1	19.8	56.5							
32	32				3.9	9.4	27	61.9	151					
40	40					4.8	13.8	31.7	77.3	189				
50	50						7.1	16.2	39.6	96.6	259			
63	63						8.1	8.1	19.8	48.3	130	317	773	1216
80	80									23.6	63.3	155	378	594
100	100										32.4	79.2	193	304
125	125											40.5	99	156
160	160												47.2	74.3

1) Please note: Speeds may be limited due to the critical frequency of the spindle/quill system.

Selection code:


Grinding quill [Quill-Ø K] x [Quill length H] [Spindle nose identification] [Wheel mount]
 Close-fit screw [Thread M1] - [Wheel width F]
 Clamping chuck [Key-bolt-Ø] x [Clamping length] [Spindle nose identification]

Example:

Grinding quill 20 x 63 D 22/38 PS
 Close-fit screw M12-25
 Clamping chuck 3 x 20 D 08/14


Spindle Nose And Grinding Quill Interface

GMN Spindle nose - Standard design



Designation	d [mm]	d Tolerance	W [mm]	M	L1 [mm]	L2 [mm]
D 04/08	4	+ 0.005 / + 0.002	8	M4 (x 0.7)	6	8
D 06/12	6	+ 0.005 / + 0.002	12	M6 (x 1)	9	11
D 08/14	8	+ 0.005 / + 0.002	14	M8 (x 1.25)	12	14
D 09/16	9	+ 0.005 / + 0.002	16	M9 (x 1.25)	13	14
D 10/18	10	+ 0.005 / + 0.002	18	M10 (x 1.5)	15	19
D 14/23	14	+ 0.007 / + 0.002	23	M14 x 1.5	20	19
D 16/28	16	+ 0.007 / + 0.002	28	M16 x 1.5	24	19
D 22/38	22	+ 0.007 / + 0.002	38	M22 x 2	34	25
D 22/43	22	+ 0.007 / + 0.002	43	M22 x 2	34	25
D 28/43	28	+ 0.008 / + 0.003	43	M28 x 2	42	25
D 32/53	32	+ 0.008 / + 0.003	53	M32 x 2	46	25
D 36/63	36	+ 0.008 / + 0.003	63	M36 x 2	50	30
D 36/68	36	+ 0.008 / + 0.003	68	M36 x 2	50	30


GMN Clamping chuck




Spindle nose D [d] / [W]	Chuck K x T	L [mm]	S1 [mm]	S2 [mm]	SW 1	SW 2
D 06/12	3 x 11	14.5	7.5	10.5	9	11
D 08/14	3 x 20	26	10	14	11	13
D 09/16	3 x 20	24	10	14	11	14
D 10/18	6 x 20	28	12	18	15	14
D 10/18	6 x 20	30	12	18	15	16
D 14/23	6 x 20	30	12	18	15	20

Grinding wheel attachment (Examples)


Type 1: Cemented wheel (KI)

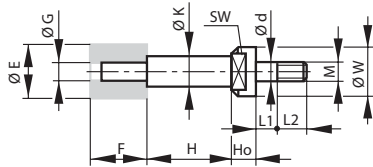


Type 2: Close-fit-screw quill (PS)

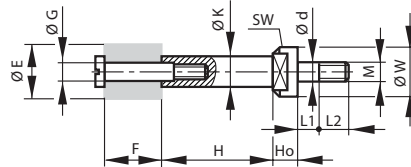


Type 3: Quill-threaded mounted points (PS)

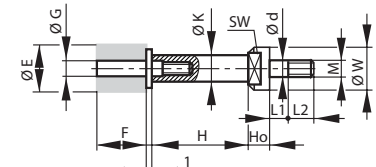


Type 4: Quill with nut (MU)

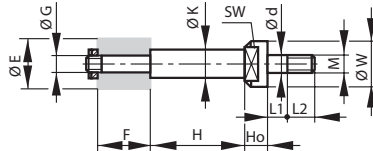

Close-fit hole for type 2 and 3



Grinding quills - Semifinished



Attachment	K [mm]	H [mm]	Attachment	K [mm]	H [mm]
D 08/14	13	70	D 22/38	38	174
D 09/16	16	80	D 28/43	43	240
D 10/18	18	90	D 32/53	53	250
D 14/23	23	135	D 36/63	63	150
D 16/28	28	210	D 36/68	68	160

Grinding quills semifinished for cost-efficient, own production of grinding quills have short delivery times. Other dimensions on request.

Speed Limitation For Spindles With Grinding Quill

Maximum speed [rpm]						
Spindle nose identification: D 04/08		H [mm]				
Spindle type	K [mm]	< 8	10	13		
HS 80c - 180000/ ...	4	180 000	180 000			
	5	160 000	150 000	130 000		
	6	140 000	130 000	110 000		
HS 80c - 150000/ ...	4	150 000	150 000			
	5	140 000	130 000	120 000		
	6	130 000	120 000	100 000		
Spindle nose identification: D 06/12		H [mm]				
Spindle type	K [mm]	< 16	20	25		
HS 80c - 120000/ ...	5	120 000	120 000			
	6	120 000	110 000			
	8	110 000	95 000	85 000		
HSX 80 - 120000/ ...	5	120 000	120 000			
	6	120 000	115 000			
	8	110 000	100 000	90 000		
Spindle nose identification: D 08/14		H [mm]				
Spindle type	K [mm]	< 20	25	32		
HSX 100 - 105000/...	5 und 6	105 000	105 000			
	8	105 000	105 000	90 500		
	5 und 6	90 000	90 000			
HS 80c - 90000/...	8	89 000	84 000	73 500		
	Spindle nose identification: D 09/16		H [mm]			
Spindle type	K [mm]	< 20	25	32		
HV-X 100 - 105000/...	5 und 6	105 000	105 000	80 000		
	8	105 000	90 000	75 000		
	10	90 000	80 000			
	5 und 6	90 000	90 000			
HSX 100 - 90000/...	8	90 000	88 000	79 000		
	10	86 500	81 500	72 000	61 500	
	Spindle nose identification: D 10/18		H [mm]			
	Spindeltyp	K [mm]	< 25	32	40	50
HV-X 100 - 90000/...	6	90 000	90 000			
	8	90 000	85 000			
	10	90 000	79 000	65 000		
	13	80 000	70 000	61 000		
HSX 100 - 75000/...	6	75 000				
	8	75 000	74 500			
	10	74 000	72 500	66 500		
	13	70 000	65 500	59 000	50 000	
Spindle nose identification: D 14/23		H [mm]				
Spindle type	K [mm]	< 32	40	50	63	
HV-X 120 - 75000/...	8	75 000	75 000			
	10	75 000	74 000			
	13	75 000	69 000	55 000		
	16	69 000	60 000	49 000	42 000	
HV-X 100 - 75000/...	8	75 000	73 000			
	10	75 000	70 000			
	13	74 000	65 000	53 000		
	16	65 000	56 000	46 000		
HSX 120 - 60000/...	8	60 000				
	10	60 000	60 000			
	13	60 000	59 000	53 500		
	16	57 000	53 000	47 500	40 000	
HSX 100 - 60000/...	8	60 000				
	10	60 000	60 000			
	13	60 000	57 500	52 000		
	16	56 000	52 000	46 500	39 500	
Spindle nose identification: D 16/28		H [mm]				
Spindle type	K [mm]	< 40	50	63		
HV-X 120 - 60000/...	8	60 000	60 000			
	10	60 000	60 000			
	13	60 000	60 000			
	16	60 000	55 000	58 000	46 000	
HV-XS 120 - 60000/...	20	56 000	51 000	55 000	45 000	
	8	60 000	60 000			
	10	60 000	60 000			
	13	60 000	59 000			
HV-X 100 - 60000/...	16	60 000	52 000			
	10	51 000				
	13	51 000	51 000			
	16	51 000	50 000	45 000		
HSX 120 - 51000/...	20	50 500	48 500	43 000		

Speed Limitation For Spindles With Grinding Quill

		Maximum speed [rpm]				
Spindle nose identification: D 22/38			H [mm]			
Spindle type	K [mm]	< 50	63	80		
HVX 100 - 45000/ ...	10	45 000	44 000	32 000		
	13	45 000	44 000	34 000		
	16	45 000	41 000	33 000		
HSX 150 - 42000/ ...	13	42 000				
	16 und 20	42 000	42 000			
	25	42 000	42 000	38 000		
HSX 120 - 42000/ ...	13	42 000				
	16 und 20	42 000	42 000			
	25	42 000	42 000	36 000		
Spindle nose identification: D 28/43			H [mm]			
Spindle type	K [mm]	< 63	80	100		
HV-X 150 - 45000/ ...	13	45 000				
	16 und 20	45 000				
	25	45 000	40 000			
	32	42 000	36 000	30 000		
HV-X 120 - 45000/ ... HV-XS 120 - 45000/ ...	13	45 000 45 000				
	16 und 20	45 000 45 000				
	25	45 000 45 000	38 000 42 000			
HSX 120 - 30000/ ...	16 und 20	30 000				
	25	30 000	30 000			
	32	30 000	29 000	25 000		
HV-X 100 - 30000/ ...	16	30 000	30 000	25 000		
	20	30 000	30 000	24 000		
	25	30 000	26 000	21 000		
Spindle nose identification: D 32/53			H [mm]			
Spindle type	K [mm]	< 63	80	100	125	
HSX 170 - 30000/...	16 und 20	30 000				
	25	30 000	30 000			
	32	30 000	30 000	30 000		
	40	30 000	30 000	28 000	23 500	
HSX 150 - 30000/ ...	16 und 20	30 000				
	25	30 000	30 000			
	32	30 000	30 000	27 500		
	40	30 000	28 000	25 000	21 500	
HV-X 120 - 30000/ ... HV-XS 120 - 30000/ ...	16 und 20	30 000 30 000				
	25	30 000 30 000	30 000 30 000			
	32	30 000 30 000	30 000 30 000			
	40	30 000 30 000	28 000 28 500			
Spindle nose identification: D 36/63			H [mm]			
Spindle type	K [mm]	< 80	100	125	160	
HV-X 150 - 30000/...	20 und 25	30 000				
	32	30 000	30 000			
	40	30 000	27 000	21 000		
	50	30 000	24 000	18 000	15 000	
	20 und 25	24 000				
HSX 170 - 24000/...	32	24 000	24 000			
	40	24 000	24 000	23 000		
	50	24 000	24 000	20 500	17 000	
	20 und 25	24 000				
HSX 150 - 24000/ ...	32	24 000	24 000			
	40	24 000	24 000	21 500		
	50	24 000	21 500	18 500	15 500	
	20 und 25	18 000				
HSX 150 - 18000/ ...	32	18 000	18 000			
	40	18 000	18 000	18 000		
	50	18 000	18 000	18 000	16 500	
	20 und 25	18 000				
Spindle nose identification: D 36/68			H [mm]			
Spindle type	K [mm]	< 80	100	125	160	
HSX 170 - 18000/...	25	18 000				
	32	18 000	18 000			
	40	18 000	18 000	18 000		
	50 und 56	18 000	18 000	18 000	18 000	


Shrink Fit Tool Holders

High speed machining requires tooling which is rigid, accurate, balanced and also economical.

Shrink fit type tool holder systems have been used successfully in high production machining centers applications with HSK and Milling Machine Tapers.

As a result of proven advantages of the shrink fit method, GMN has developed a manual change style holder design.

Dimensions

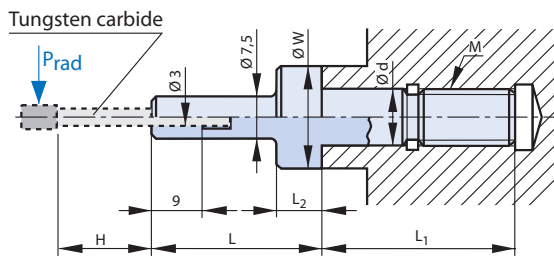

Spindle type	L [mm]	L ₁ [mm]	L ₂ [mm]	d [mm]	W [mm]	M
HS 80c- 180000 / 0.4	14	14	4	4	8	M4
HS 80c- 150000 / 0.5						
HS 80c- 120000 / 1.1	14,5	20	5	6	12	M6
HSX 100- 105000 / 2						
HS 80c- 90000 / 2	26	26	6	8	14	M8
HSX 100- 90000 / 3						
HSX 80- 120000 / 1.1	24	27	6	9	16	M9
HSX 100- 75000 / 5	30	34	8	10	18	M10
HSX 100- 60000 / 5						
HSX 120- 60000 / 7	30	39	8	14	23	M14 x1.5


Ordering information: [Shrink fit holder d / W x 3](#)

Ex. HSX 100-75000/5: d (10) / W (18) x 3.

The „3“ indicates the clamping diameter. The standard and smallest clamping diameter is 3 mm. Larger diameters are available upon request.


Clamping method

There are several heat shrinking systems available. The most economical for the manual type tool holders is the „HOT AIR“ method.

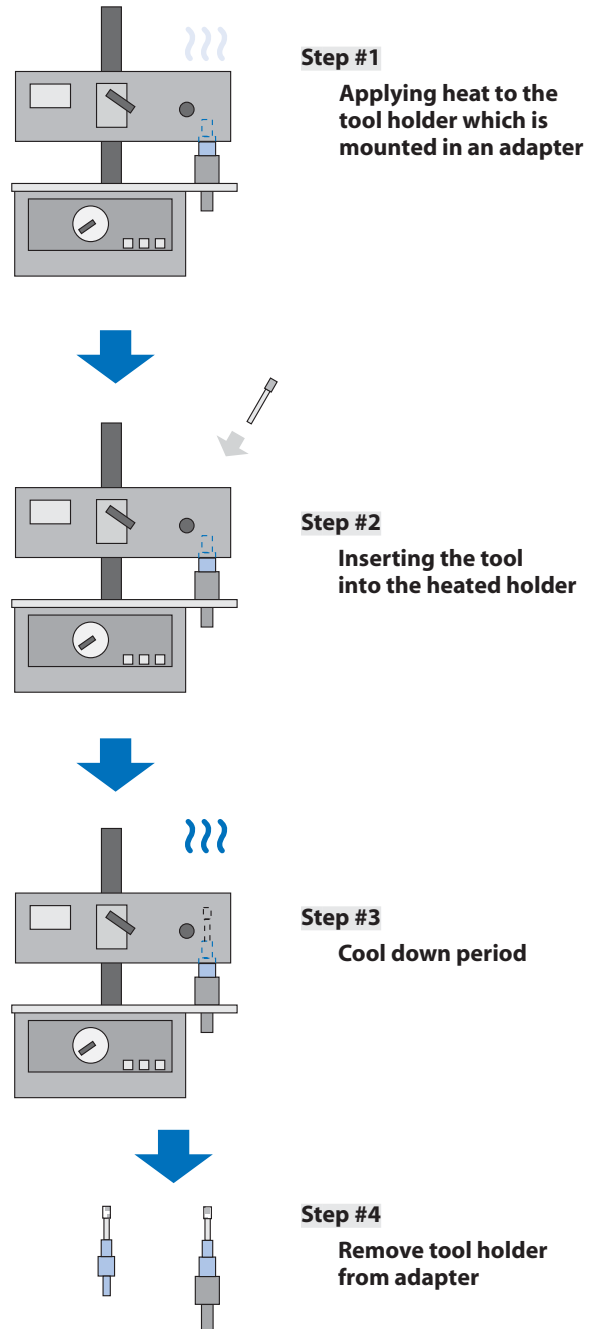


Shrink Fit Tool Holders

Tungsten carbide mounted abrasive points Tungsten carbide milling cutters

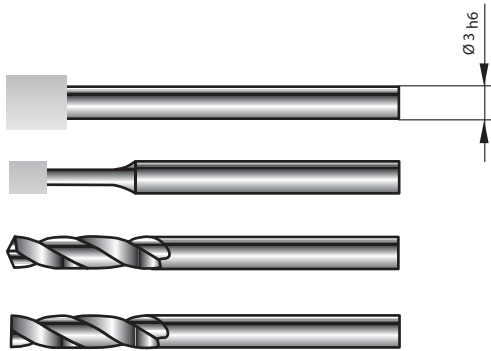

The use of tungsten carbide tools is economical due to the cylindrical form and rigid because of the high modulus of elasticity.

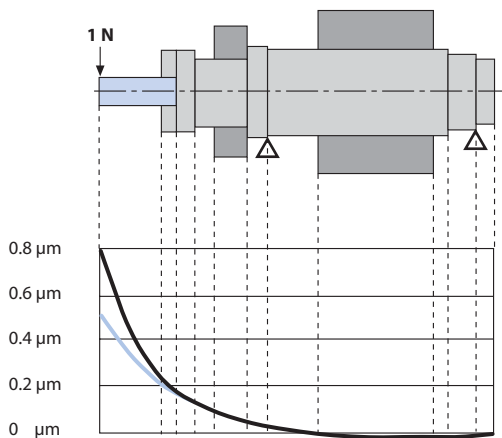



The diagram illustrates the calculated stiffness model for a typical spindle shaft with a mounted abrasive point show in *Blue*.

Using shrink fit mounted tungsten carbide tool shanks, and applying a radial load of 1 N at the end of the tool, the calculated deflection is 0.5 µm, if the tool were made of standard tool steel and mounted in a collet chuck the deflection would be 0.8 µm. Another advantage of use of carbide significantly lowers the natural frequency of the system.

Combining tungsten carbide tools with shrink fit style holders is a technically superior/low cost solution for attaining the critical attributes required in high speed machining.

Application restrictions


The proper operation of a spindle is determined by effects of tooling lengths, weights, and geometry. The positive qualities of the shrink fit holders and tungsten carbide tooling described in this section are not to be construed as declaration for all applications. GMN is pleased to offer our analytical services to determine the proper selection for spindles and tooling.

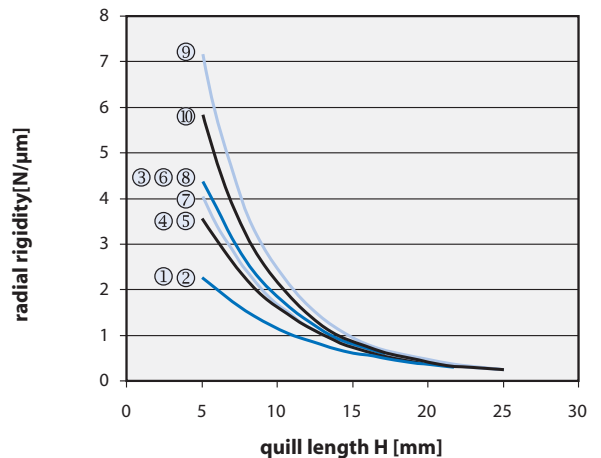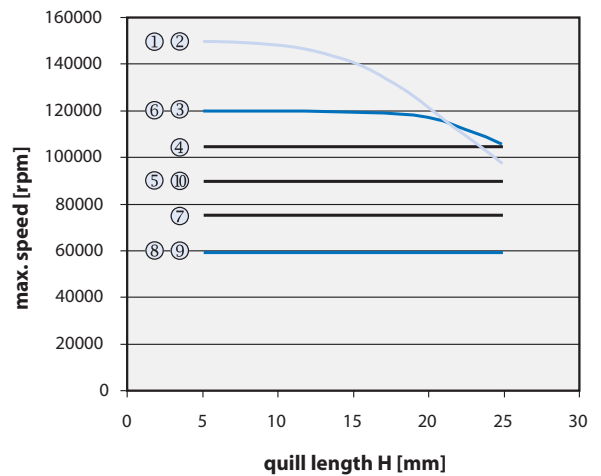


- | | |
|---------------------|---------------------|
| ① HS 80c-180000/0,4 | ② HS 80c-150000/0,5 |
| ③ HS 80c-120000/1,1 | ④ HSX 100-105000/2 |
| ⑤ HS 80c-90000/2 | ⑥ HSX 80-120000/1,1 |
| ⑦ HSX 100-75000/5 | ⑧ HSX 100-60000/5 |
| ⑨ HSX 120-60000/7 | ⑩ HSX 100-90000/3 |

Short Taper Interface

Short taper interface

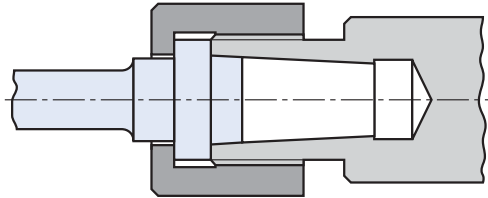


Direct quill interface

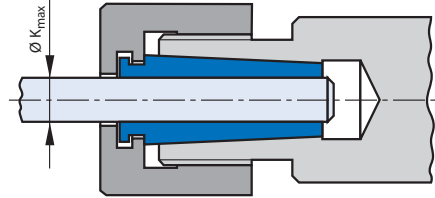


Collet clamping method


Quills and grinding wheel attachments (examples)

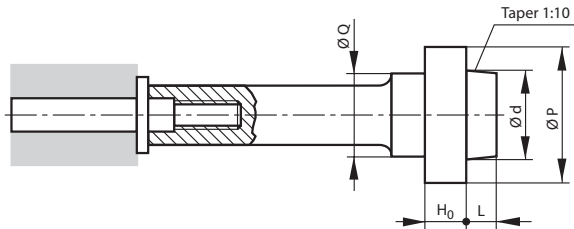

- ▶ Quill with threaded mounted wheel mandrel

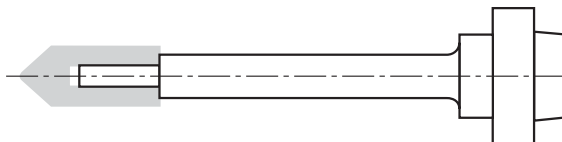

- ▶ Grinding quill, solid
- ▶ Material: steel or tungsten carbide
- ▶ Cemented or glued on wheel

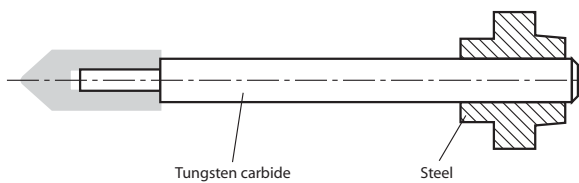

- ▶ Grinding quill (2) piece construction
- ▶ Tungsten carbide pin mated to steel pilot
- ▶ Cemented or glued on wheel

Designation	d [mm]	L [mm]	P [mm]	H ₀ [mm]	Q [mm]	K _{max} [mm]
T 7	7	3	10.4	2.8	7.95	4
T 9	9	3	13.6	2.9	11.3	6
T 12	11.9	5	18.6	4.4	16.85	8

HSK Style Interface

"Hollow tapered shanks with flat contact surfaces" are standard per DIN 69893. The different "FORM'S" of a particular size are based on a similar shank size (d1) dimension. The tool flange is dictated by the mode of tool change.

HSP/HV-P style spindles allow the use of tools with short hollow shanks, type "A" and "C".



Form "C" was developed specially for manual tool changing systems. Form "A" is distinguished by the "V" groove provided for automatic tool changing systems.

Form "A" can also be used with the manual tool change system provided in the HSP/HV-P style spindles. This reduces the need for additional tool holders if automatic tool changing systems are already in place.

Tools according to Form B, D, E and F cannot be used in the HSP/HV-P style spindles, they are designed for different applications.

The HSK allows the rotation of the HSP/HV-P spindle style in both directions

HSK Form C according to DIN 69 893

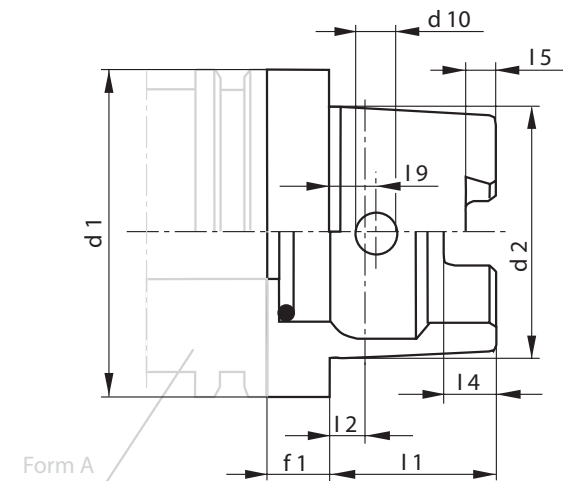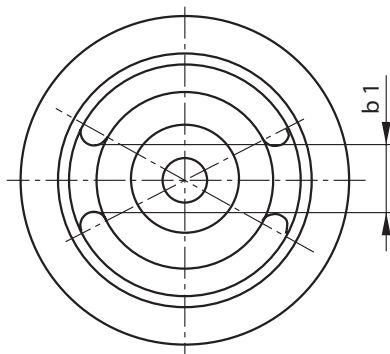


Nominal size = d1	Taper-Ø d2 [mm]	d10 [mm]	Taper length l1 [mm]	l2 [mm]	l4 [mm]	l5 [mm]	l9 [mm]	b1 [mm]	f1 [mm]
25 ¹⁾	19	3.5	13	2.5	4	2	4	6	8
32	24	4	16	3.2	5	3	5	7	10
40	30	4.6	20	4	6	3.5	6	8	10
50	38	6	25	5	7.5	4.5	7.5	10.5	12.5
63	48	7.5	32	6.3	10	6	9	12.5	12.5
80	60	8.5	40	8	12	8	12	16	16
100	75	12	50	10	15	10	15	20	16

1) During the development of this catalog style HSK 25 was not yet a DIN Standard.

HSK Clamping System


Hollow taper shanks with flat contact surface

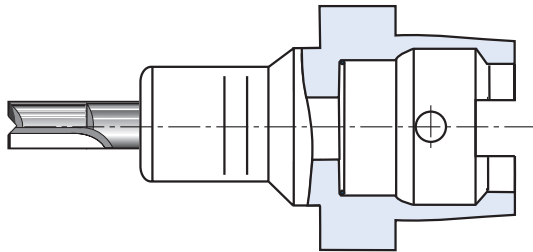

Advantages:


- ▶ High static and dynamic rigidity
- ▶ High tool change accuracy and repeatability
- ▶ Low axial movement during speed variations
- ▶ Increased pull-in force as speed raise
- ▶ High torque transmission
- ▶ Reduced hazard due to internal drive dogs

Driving slots

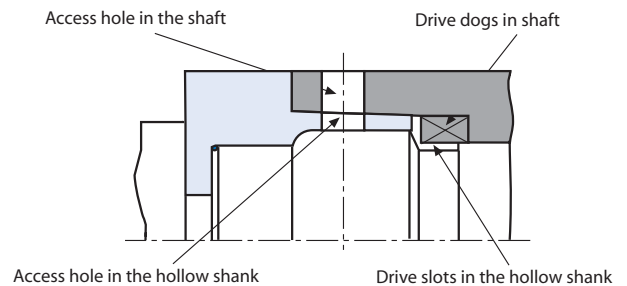


The frictional contact between the tool shank and shaft face provides excellent torque transmission. The internal drive dogs provide additional holding power to keep the access holes aligned in the shaft and tool when overloaded.

Manual actuating

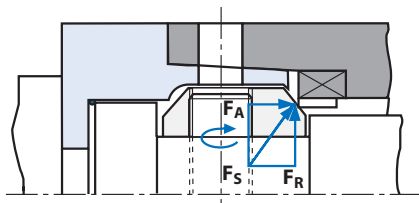

The claws of the gripper assembly are actuated outward, when the radially positioned differential threaded rods are actuated, and force component F_A axially into the tool holder, thus pulling the tool holder shank against the shaft face, and pressing the tapered portion of the shank to its elastic limits against the shaft's internal taper via component F_R .

Hollow shank and axial plane surface

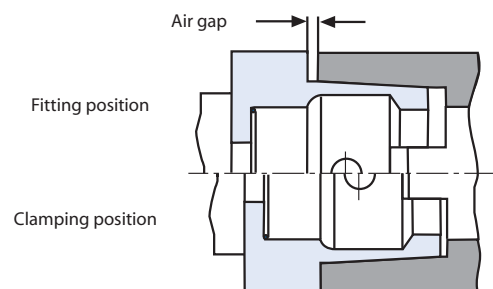


The manual system is designed so that during installation a gap exist between the shank face and the shaft.

The required rigidity is produced through the stress against the taper and axial surfaces generated by the force of the clamping system.

Tool Clamping Systems

Shrink fitted tool shank

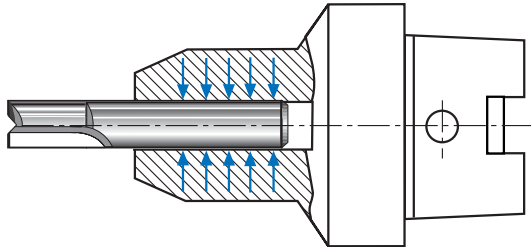


Shrink fitted type holders for cylindrical tool shanks are similar to monolithic holders:

- ▶ High radial rigidity
- ▶ High runout accuracy
- ▶ High transferable torque
- ▶ High repeatability during tool change

A preheater is required.


Hydraulic expansion chuck

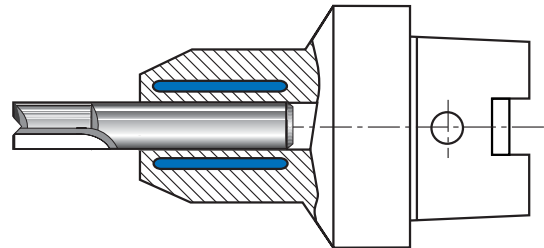

Hydraulic expansion chucks offer high runout accuracy. Tools can be replaced quickly. A device for exchange is not necessary. Reduction bushings allow smaller shank diameters to be clamped, this can effect the run out.

The oil cell across the tool shank leads to vibration damping and improves the surface quality.

Fine boring tool

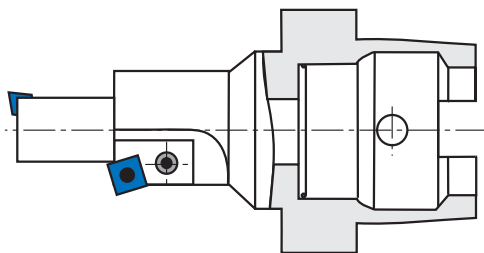


Reversible carbide tipped inserts **must** be positively locked or the strain caused by the centrifugal forces at high speeds, on the screws alone can lead to vibration and shearing.

For safety reasons the permitted peripheral speed must be analyzed and maintained.

Asymmetry causes unbalance. To avoid inadmissible vibrations tools have to be balanced to an acceptable degree.

Collet chuck

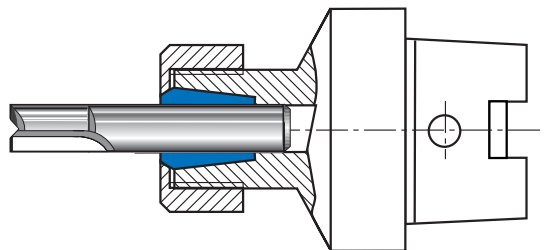

Collet chucks are an economical alternative for light duty machining at low speeds, with low accuracy requirements.

Special designs are required for high speed machining.

Collet chucks are readily available and require a minimal effort to change shank sizes.

Oil/air Lubricator PRELUB

Safe start due to pre-lubricating

The unit is designed for the optimised supply of lubricant to GMN spindles. The (6) lubricating points allow for the connection of one, two or three spindles. The pre-lubricating cycle guarantees a safe start during machine start-up. The separate monitoring of the oil level assures trouble free completion of the operation.

The supply lines can be laid so that they rise or drop. The line length has to be between 0.5...5 m.

The units

- ▶ PRELUB MV 2 - 2 lubricating point connections
- ▶ PRELUB MV 4 - 4 lubricating point connections
- ▶ PRELUB MV 6 - 6 lubricating point connections


are with integrated oil/air mixing distributor.

The oil/air mixing distributor for PRELUB style MV 0 has to be ordered separately. The mixing distributor can be mounted in up to max. 30 m away the unit.

Refer to the spindle operating instruction manual or test certificate for oil quality, cycle times and pressures.

Equipment

- ▶ Air/filter regulator (5 µm) with air gauge
- ▶ Interface with the machine tool control system to signal readiness for operation after checking
 - oil level
 - oil pressure and oil release pressure
 - air pressure
 - pre-lubricating cycle
- ▶ Timer for matching cycle time to oil viscosity and spindle data
- ▶ Lubricating point connections for PVC tubing, O.D 6 mm
- ▶ Operating voltage 230 V, 50/60 Hz
Option 110 V, 50/60 Hz
- ▶ Air supply G 1/2"
 $p_{\min} = 6 \text{ bar}, p_{\max} = 10 \text{ bar}$
- ▶ Power supply and monitoring via connector
- ▶ Installed in control cabinet
380 x 380 x 210 mm (W x H x D)
Enclosure IP 54
- ▶ Colour: RAL 7032 (grey)
- ▶ Fuse protection for 230 V: 1 A; 110 V: 2 A

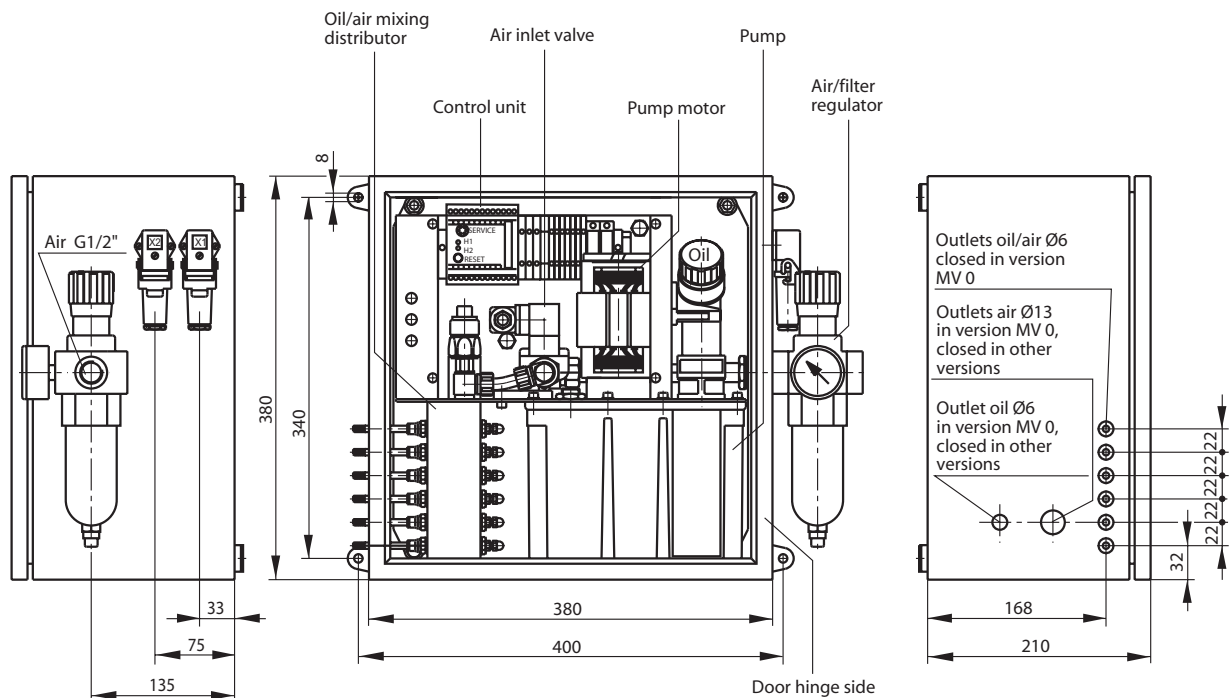

Oil/air Lubricator PRELUB

Oil/air mixing distributor (6 outlets)


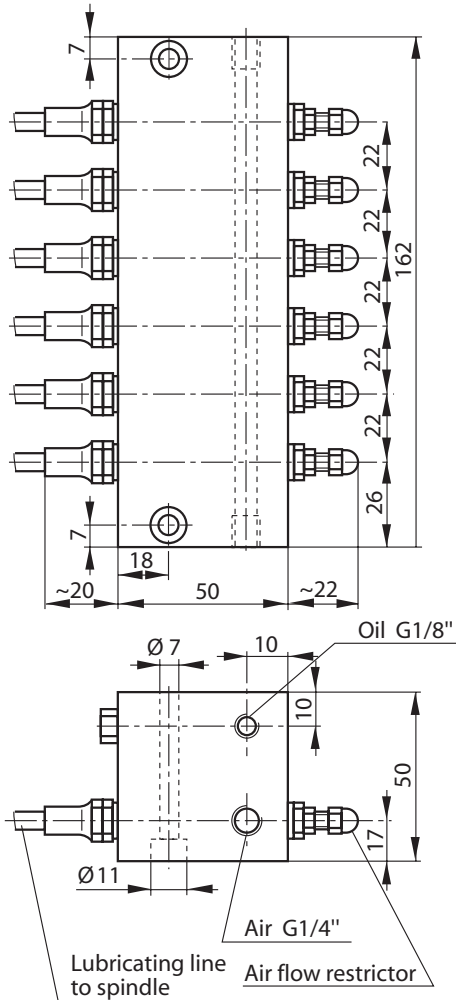


Diagram of pre-lubrication

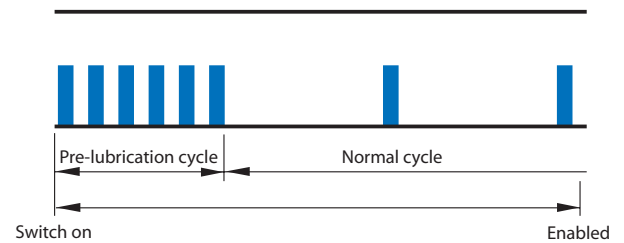

- ▶ Switch on the oil/air lubricator
- ▶ Carrying out the pre-lubrication cycle before the enable signal to the spindle is given for operating:
 - several lubricating pulses within a short time (pre-lubrication cycle)
 - transition to the normal cycle, that means cycle time as during spindle operation
- ▶ The spindle is enabled after the pre-lubrication cycle time is finished (depends on the length of the line)

Control of the air pressure

The reliability and reliability of operation of the oil/air lubricator PRELUB has been confirmed for many years in a lot of applications. Nevertheless manometric switches can be mounted additional in the lubricating lines on customer's requirements. The evaluation is made directly by the machine control.


Accessories

Required accessories for the installation and commissioning such as tubing, pressure gauge and filtered lubricating oil are available.

Maintenance

Compressed air and lubricating oil must be pre-filtered as described in the operating instruction manual.

Replacement filter cartridges are available for both filter elements.

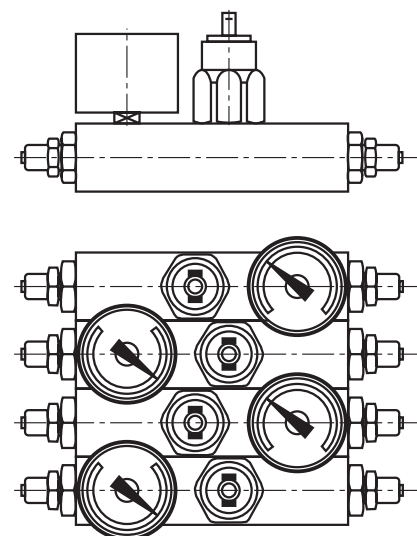

Chillers

GMN high frequency spindles utilize the most powerful motors available for their size. The current draw through the windings causes extreme temperature rises, which are limited by the insulation.

In order to obtain peak performance the heat must be dissipated.

We can provide the proper size self contained units for removing the motor and bearing heat losses.

- ▶ The units operate with FCKW free refrigerant R407c
- ▶ Coolant temperature 20°C ... 25°C
- ▶ Control hysteresis
Style T: ± 2°K, Style F: ± 1°K
- ▶ Option: for control of axial shaft growth temperature can be controlled to
Style T: ± 1.2°K, Style F: ± 0.5°K
- ▶ Acceptable ambient temperature + 42°C
- ▶ Option: single supply units for multi spindle applications
- ▶ Fluid level monitoring, flow switch and fault indicator for protecting spindles
- ▶ Colour
Style T: blue according to RAL 5019 ⁴⁾
Style F: grey according to RAL 7032 ⁴⁾
- ▶ A rust inhibitor must be added to the cooling solution



Style T



Style F

Type	Cooling capacity ²⁾ [kW]	For spindle power [kW]		Tank capacity [l]	Supply voltage ³⁾	Dimensions L x B x H [mm]
		S6-60%	S1			
K 0.9-T/2	0.9	6	4.5	18	1 x 230 V, 50 Hz	705 x 510 x 450
K 1.4-T/2	1.4	9.3	7	18	1 x 230 V, 50 Hz	705 x 510 x 450
K 2.5-T/2	2.5	16.6	12.5	18	1 x 230 V, 50 Hz	705 x 510 x 450
K 3.9-T/2	3.9	26	19.5	30	1 x 230 V, 50 Hz	755 x 600 x 500
K 5.3-T/2	5.3	35.3	26.5	30	1 x 230 V, 50 Hz	755 x 600 x 500
K 2.6-F ¹⁾	2.6	17.3	13	90	3 x 400 V, 50 Hz	715 x 715 x 1375
K 4.1-F ¹⁾	4.1	27.3	20.5	90	3 x 400 V, 50 Hz	715 x 715 x 1375
K 6.7-F ¹⁾	6.7	44.6	33.5	90	3 x 400 V, 50 Hz	715 x 715 x 1375


1) In the refrigerant circulation additional to high pressure monitoring low pressure monitoring.

2) At 37°C ambient temperature and 20°C water temperature.
The cooling capacity decreases at higher ambient temperatures.

3) Different voltages and frequencies on request.

4) Different RAL colours on request.

Chillers

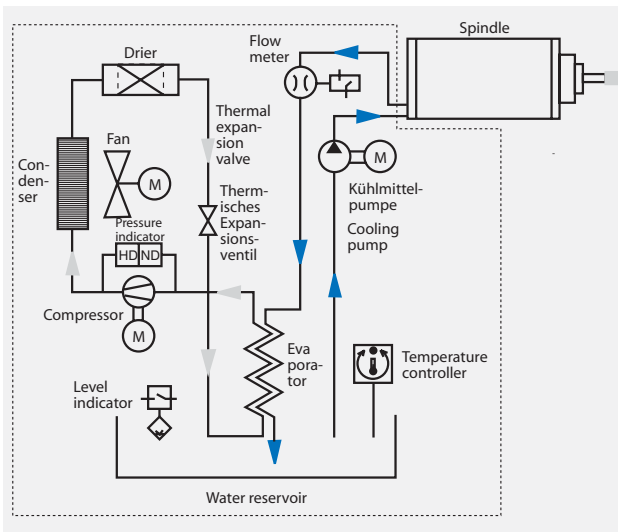


Coolant circulation:

- ▶ The recirculating pump in the chiller moves coolant from the reservoir to the spindle back to the tank.
- ▶ The coolant absorbs heat as it passes through the spindle.
- ▶ The coolant returns to the chiller and passes through the evaporator/heat exchanger where heat is absorbed from the coolant into the refrigerant.
- ▶ The "refrigerated" coolant then returns to the reservoir.


Refrigerant circulation:

- ▶ Cool refrigerant gas is pumped out of the evaporator/heat exchanger by the compressor and compressed into a high temperature, high pressure gas and delivered to the condenser.
- ▶ In the condenser the gas condenses into a liquid as it dissipates heat to the air being blown across the condenser fins.
- ▶ The cooled, high-pressure liquid refrigerant then passes through the expansion valve to the low-pressure side of the evaporator. The refrigerant absorbs heat from the coolant passing through the evaporator as it changes from a liquid to a gas.

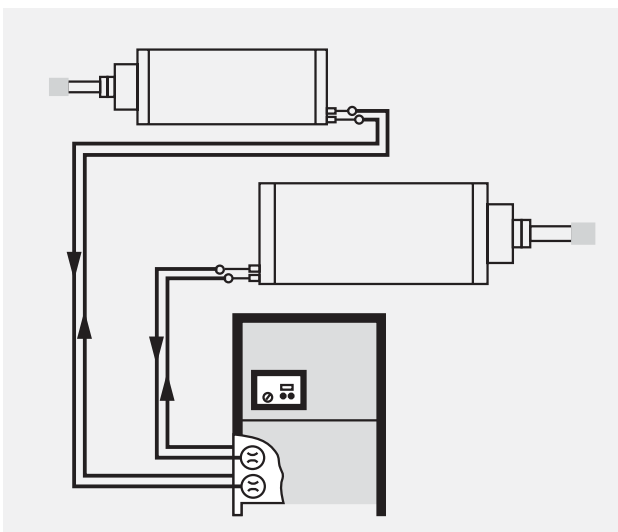

Parallel connection:

- ▶ Multiple spindles operating from a single chiller unit.
- ▶ Spindles of different sizes, cooling and flow requirements should be connected in parallel.
- ▶ It is important to select the correct chiller with sufficient cooling and flow capacity for all the spindles being used.
- ▶ Individual flow monitoring units are required for each cooling loop.

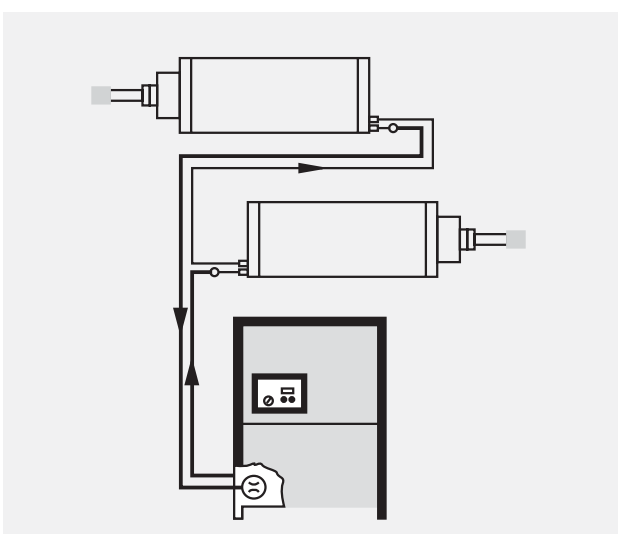


Series connection:

- ▶ Multiple spindles operating from a single chiller unit.
- ▶ Spindles of the same sizes, cooling and flow requirements should be connected in series.
- ▶ Do not plump more than two (2) spindles in series.
- ▶ A single flow monitoring unit is required for a series setup and mounted at the end of the run.


Please contact GMN for assistance in choosing the proper sized chiller unit.

Typical Applications


Grinding raceway in ball bearing
outer race, $v \approx 80$ m/s

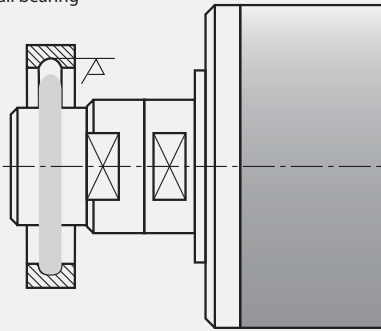


Grinding or **precision hard milling** ball raceway in
socket end of universal joint

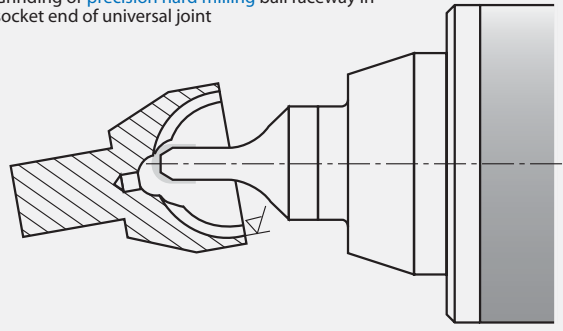


Grinding bore in ball bearing
inner race, $v \approx 80$ m/s

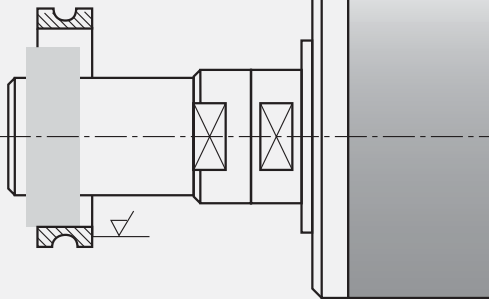


Grinding roller raceways in double-row
needle bearing, $v \approx 60$ m/s

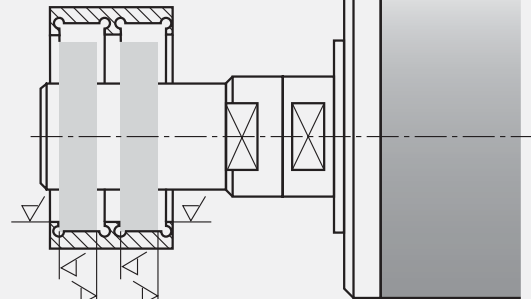


Grinding bore with
small internal taper, $v \approx 35$ m/s

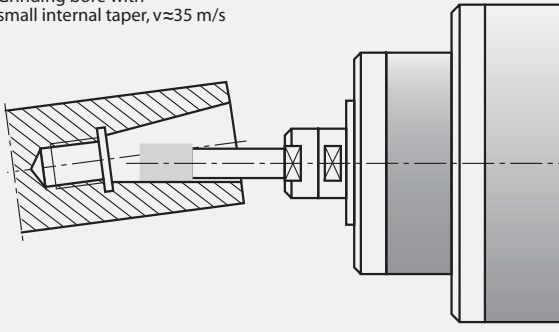


Grinding bore and bottom face
with coolant supply through shaft, $v \approx 60$ m/s
alternative through precision hard milling

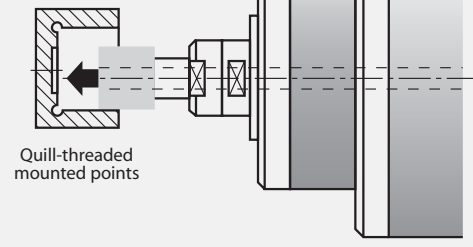

Grinding bore and conical seating
in fuel injector, $v \approx 35$ m/s

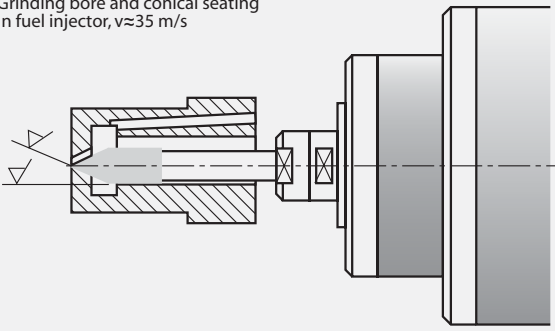

Grinding bore
in collet chuck, $v \approx 45$ m/s

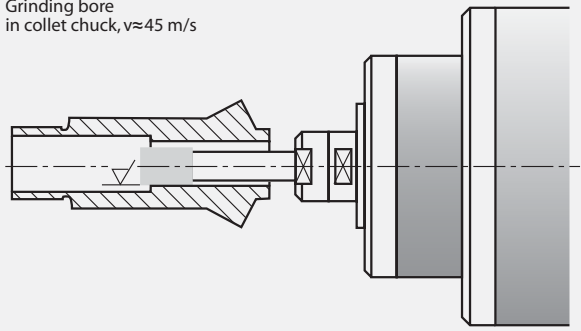

Standard values for precision milling

Material	Cutting material	Cutting speed v_c [m/min]	Feed rate f_z [mm]	Surface finish R_{zDIN} [μm]
Cold work tool steel heat-treated, HRC 63	CBN	150...300	0.025...0.1	0.5...5
Hot work tool steel, HRC 45 tensile strength 800 N/mm ²	Cermet	120...160	0.1...0.2	0.5...2
Nodular graphite iron heat-treated, HRC 58	CBN	180...220	0.15...0.2	0.7...3.5
Turbine blades steel tensile strength 1000 N/mm ²	Tungsten carbide, coated	600	0.1	1.5...3
St 70 tensile strength 900 N/mm ²	Tungsten carbide, coated	400	0.3	1...2.5
Gray cast iron, alloyed	Tungsten carbide, coated	1200	0.15	2...3

Standard values for drilling into solid material

Material	Cutting material	Cutting speed v_c [m/min]	Feed rate f_z [mm]	Form error EKF [μm]
Turbine blades steel tensile strength 1000 N/mm ²	Tungsten carbide, coated ¹⁾	70	0.08	5...16
Heat-treatable steel tensile strength 800 N/mm ²	Tungsten carbide, coated ¹⁾	200	0.06	6
Gray cast iron, alloyed tensile strength 260 N/mm ²	Tungsten carbide, coated ¹⁾	200	0.06	10...13

1) Coolant through tool.

Standard values for boring

Material	Cutting material	Cutting speed v_c [m/min]	Feed rate f [mm/U]	Form error EKF [μm]
Turbine blades steel tensile strength 1000 N/mm ²	Cermet ¹⁾	200...220	0.05...0.125	1...3
Heat-treatable steel tensile strength 800 N/mm ²	Cermet ¹⁾	200	0.025...0.1	1...3
Gray cast iron, alloyed tensile strength 260 N/mm ²	Cermet ¹⁾	125...175	0.05...0.1	1...3

1) Initial condition rough-finished, with supported tool, with coolant.

Main source for the data:

"Hochpräzisionszerspanen mit geometrisch bestimmter Schneide, FQS-Schrift 96-03, Beuth-Verlag GmbH"

Applications And Processes

Turn-milling


Turn-milling describes a method of processing a rotating workpiece via a rotating tool with geometrical determined cuts, e.g. milling cutter.

Advantages


- ▶ High cutting speed when operating next to the rotating axis of the workpieces
- ▶ Low forces of gravity while manufacturing unbalanced parts because of low rotational velocity of the workpiece
- ▶ Perfect chip breaking due to interrupted cut

Specific attributes for process

- ▶ Improved surface quality because of large differential relationship of speed between tool and workpiece
- ▶ Improved surface quality because of controlled overlapping of cut traces






without overlapping of cut traces



2 times overlapping of cut traces

Process variations

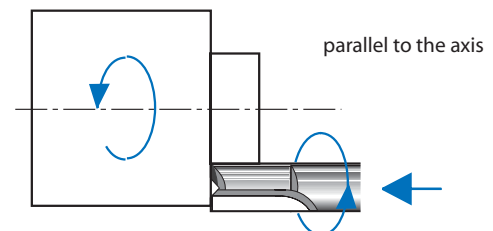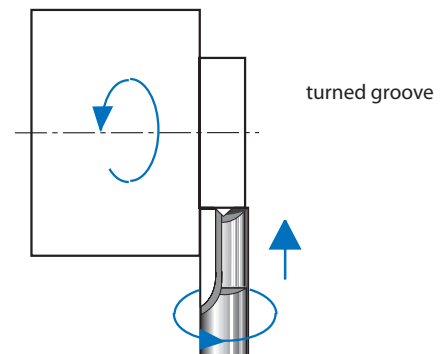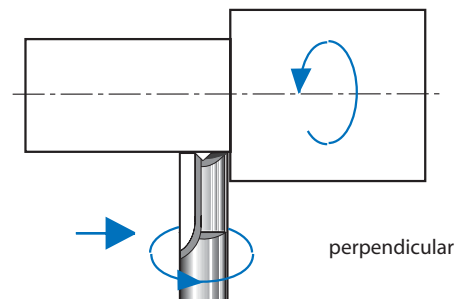

Standard values for turn-milling


Material	Cutting material	Cutting speed v_c [m/min]	Feed rate f_z [mm/U]	Depth of cut a_e [mm]
Ball and roller bearing steel, hardened, HRC 62	CBN ¹⁾	350...400	0.1...0.15	≥ 0.1
Heat-treatable steel HRC 52	P 40 ¹⁾	200...275		≥ 0.1
Austenitic steell X 5 CrNi 18 9	P 40 with TiN medium temperature-CVD-coating ²⁾	175		1...3

1) Cooling/lubricating: dry


2) Cooling/lubricating: oil mist

Proper Spindle Selection

Flowchart for selecting the optimum spindle

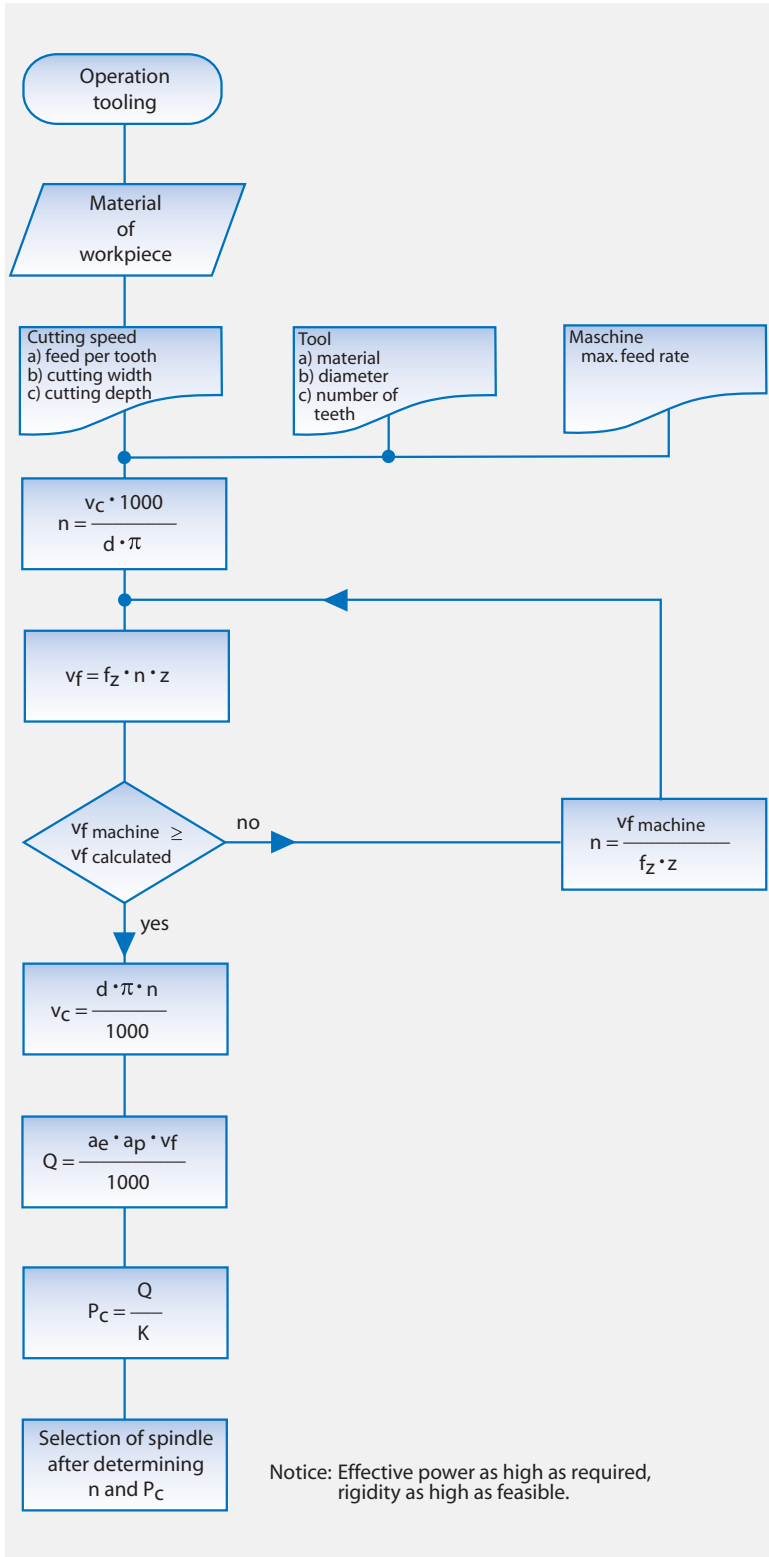

Symbols and values

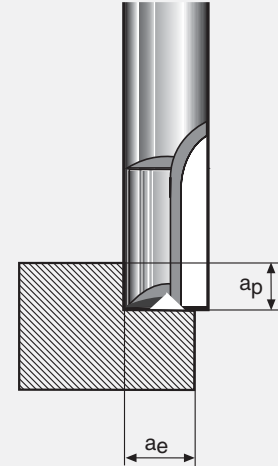


ae [mm]	Cutting width
ap [mm]	Cutting depth
d [mm]	Tool diameter
fz [mm]	Feed rate per tooth
z	Number of teeth
n [1/min]	Spindle speed
vf [mm/min]	Feed rate
vc [m/min]	Cutting speed
Pc [kW]	Effective power
Q [cm ³ /min]	Volume of material
K [cm ³ /kW min]	Spec. material removal rate

Standard values for K

Structural steels	10...5
Alloy steels	5...8
Cast iron	15...30
Casting steel	10...15
Aluminium alloy	60...70

Workpiece Cooling

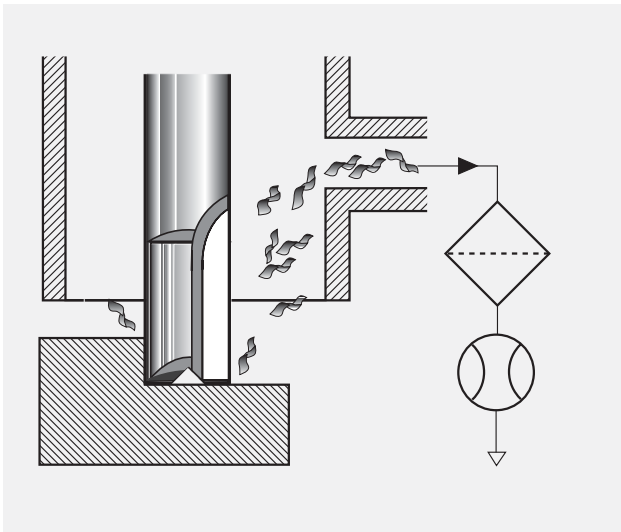


Dry machining

Advantages:

- ▶ No cost for coolant
- ▶ No swarf contamination
⇒ low costs for disposal
- ▶ Slight expenditure for sealing machine and spindle
- ▶ Environmentally compatible

Disadvantages:

- ▶ Lower tool life
- ▶ Reduced rate of metal removal
- ▶ Surface finish quality

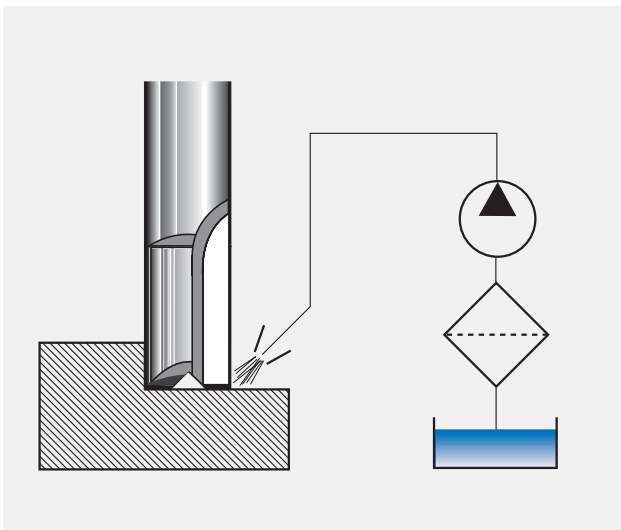


Liquid cooling/lubrication

Advantages:

- ▶ Higher surface finish quality
- ▶ Size control
- ▶ Long tool life
- ▶ Large rate of metal removal

Disadvantages:

- ▶ Costly machine sealing
- ▶ High costs for chip disposal and used coolant

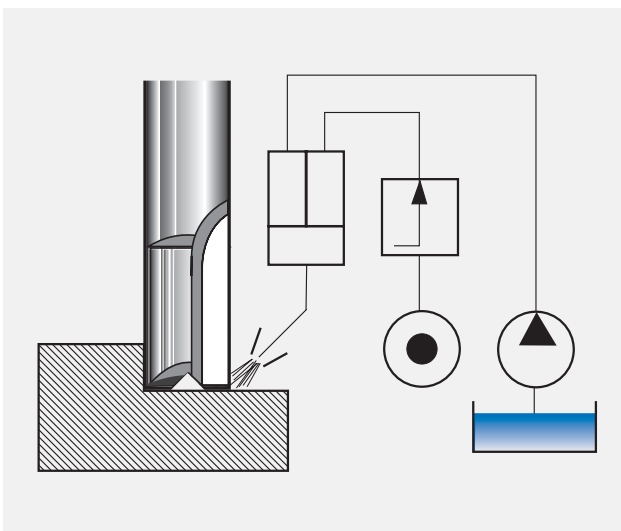

Spray cooling/lubrication

Advantages versus dry machining:

- ▶ Improved tool life and surface finish quality
- ▶ Increased rate of metal removal
- ▶ Feasible surface protection of workpiece

Disadvantages versus dry machining:

- ▶ Costly spindle sealing




Disadvantages versus liquid cooling/lubrication:

- ▶ More difficult chip removal

Quality Assurance

Test certificate

The record supplied with every GMN spindle contain actual data about axial and radial rigidity, vibration values, power and temperature. Other measurement conditions and limiting values differing from the GMN test standard can be accommodated.

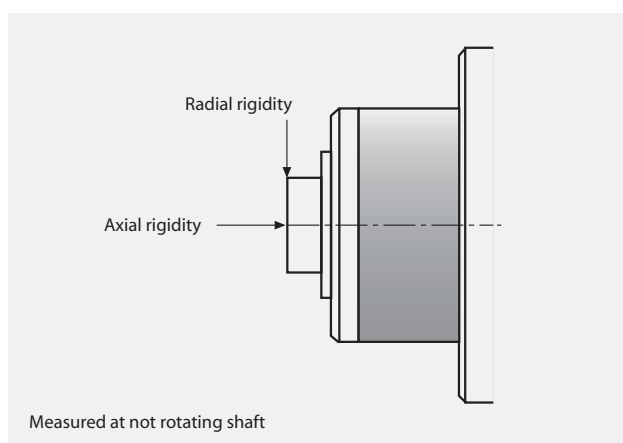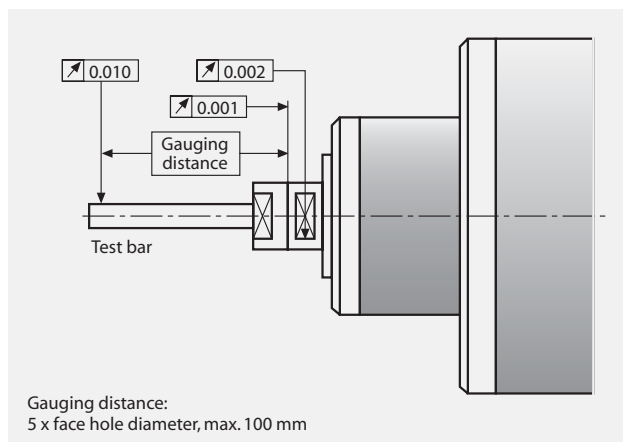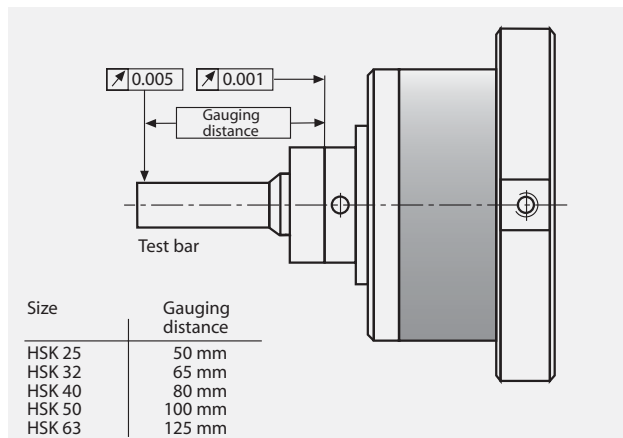

Operating instructions

Operating instructions are available in English and German. They are also obtainable in other languages on request.

Training

Courses with theoretical and practical content for using GMN spindles and fittings and carrying out repair work are offered.

Initial operation

Spindles and spindle systems can be commissioned by GMN technical personnel on request; outside Germany, this may be carried out by our authorised service companies. It is a prerequisite that the spindle is correctly installed using correct materials, fluids and initial start-up preparation.

Repair service

We recommend that the spindles are repaired by us or our authorized repair shops.

The GMN spindle repair service offers cost-effective, rapid and professional work. We also have the necessary special equipment, such as balancing instruments, vibration and rigidity measuring instruments and devices for assembly and dismantling.